



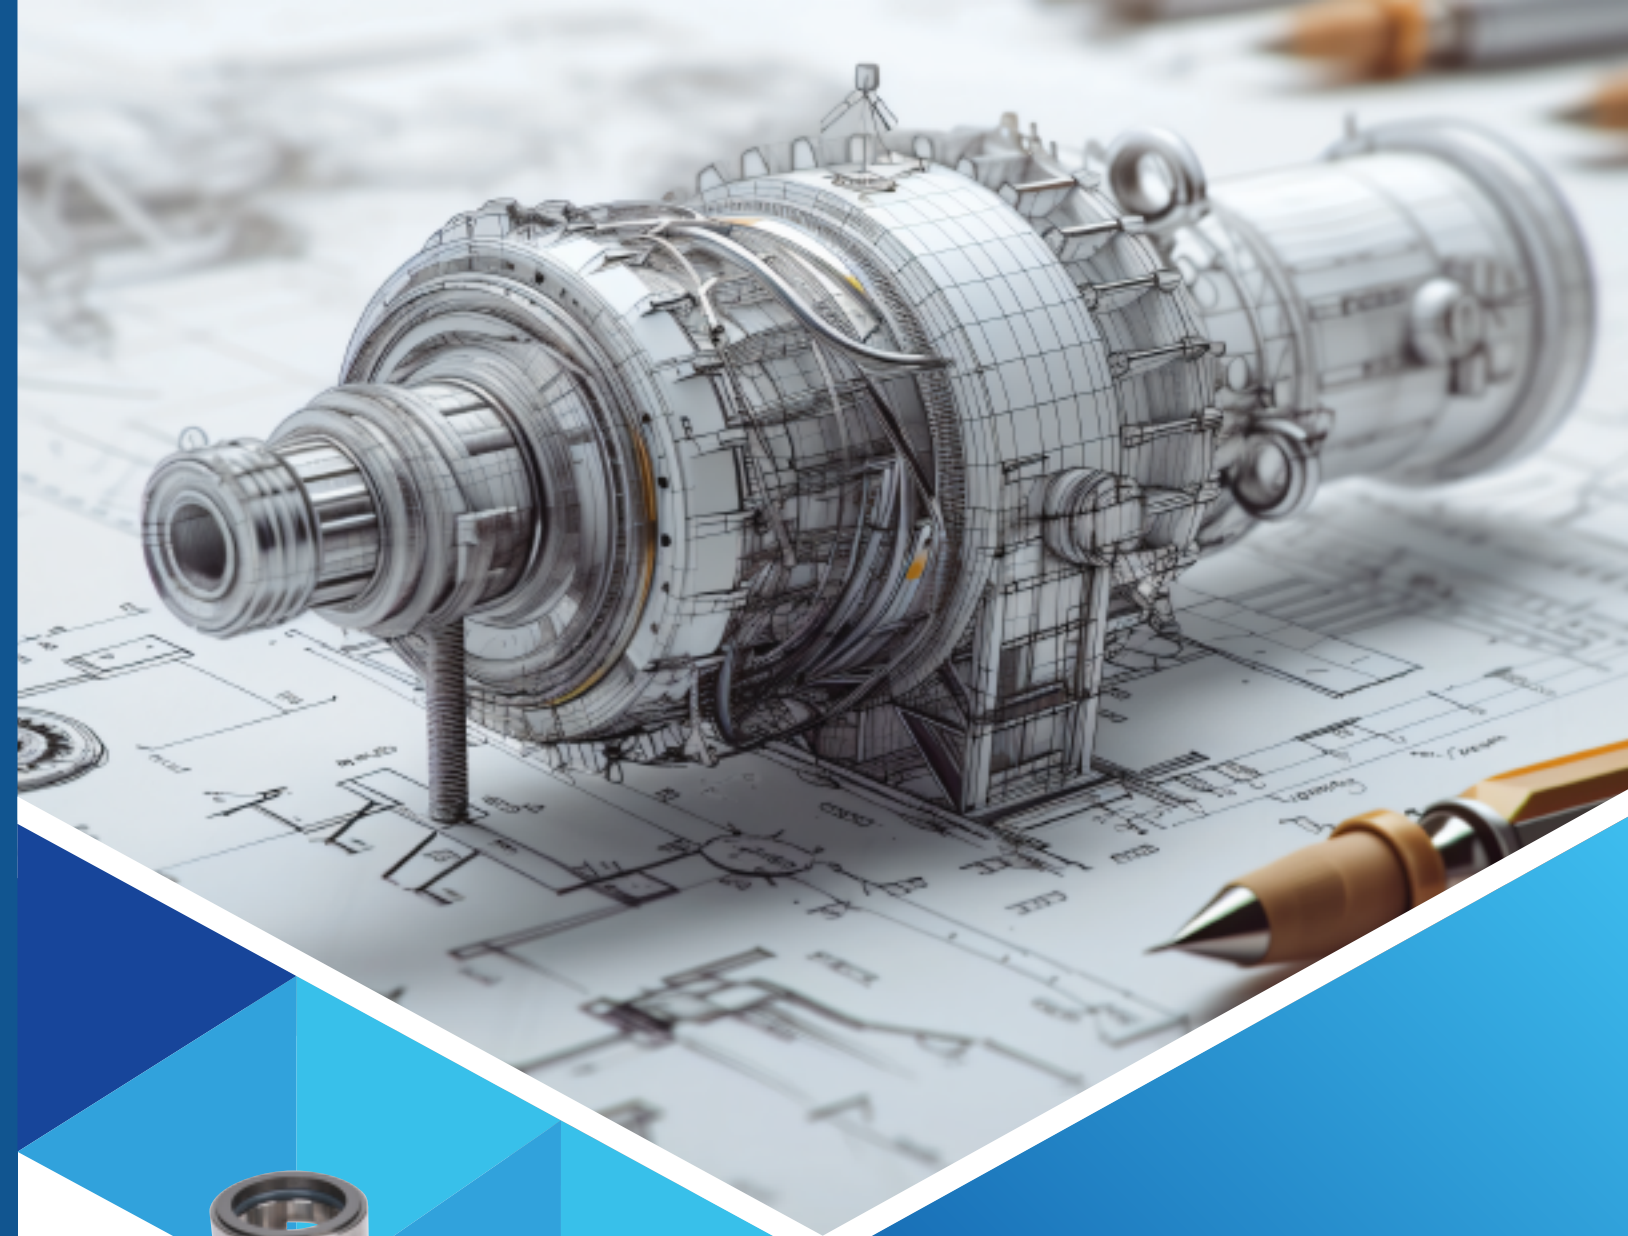

JIEXIN MECHANICAL SEAL CO., LTD

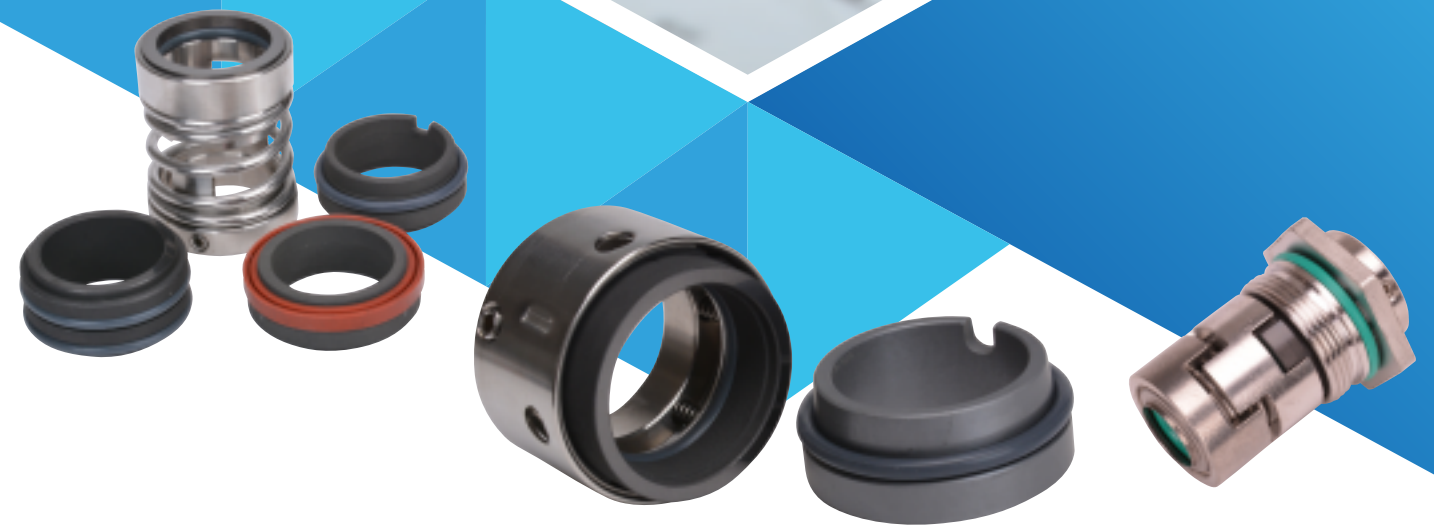

🔍 Contact: Huo Yuwei

✉ Email: a1392553104@163.com

📱 WhatsApp: +0086 1392553104

🌐 <https://jiexinseal.en.alibaba.com/>

📍 Address: Sanhe Industrial Zone, Hengkeng, Liaobu Town, Dongguan, Guangdong

JIEXIN
MECHANICAL SEAL CO., LTD

Contact person: +0086 1392553104



JX-MG1 P05



JX-MG12 P06



JX-MG13 P07



JX-BIA P08



JX-560A P09



JX-101 P10



JX-102 P11



JX-103 P12



JX-108 P13



JX-155/155B P14



JX-156 P15



JX-166 P16



JX-E P17



JX-202/208 P18



JX-T2/FBD P19



JX-T1/FBC P20



JX-70 P21



JX-2100/2100K P22



JX-301 P23



JX-CR(GF) P24



JX-CR(4R) P25



JX-GF(04) P26



JX-GF(05) P27



JX-CR(3R) P28



JX-GF(03) P29



GF01(SZB) P30



JX-WE P31



JX-LWR-22 P32



JX-FS P33



JX-APV P34



JX-MGS20 P35



JX-H12N P36



JX-M2N P37



JX-551A P38



JX-551B P39



JX-M3N P40



JX-21 P41



JX-120/120P P42



JX-103 P43



JX-1527 P44



JX-SE P45



JX-108U P46



JX-112 P47



JX-128/128P P48



JX-AL P65



JX-M7N/M74N P66



JX-109B/8B-1 P67



JX-10T/10R P68



JX-113 P49



JX-124 P50



JX-2500 P51



JX-606 P52



JX-152 P69



JX-WB2 P70



JX-LPS P71



JX-XB P72



JX-560D P53



JX-M74D P54



JX-202 P55



JX-502 P56



JX-204B P73



JX-212 P74



JX-HRN P75



JX-LW P76



JX-104 P57



JX-58U/59U P58



JX-102U P59



JX-HJ92N P60



JX-6SB/SB P77



JX-6CK/16 P78



JX-6A P79



JX-6-CH-16 P80



JX-FLWT80 P61



JX-RFL85N P62



JX-109/8U P63



JX-58B/59B P64



JX-6B P81



JX-6C P82



JX-6BG P83



JIEXIN MECHANICAL SEAL CO., LTD

Contact: Huo Yuwei

WhatsApp: +0086 13925553104

Email: a13925553104@163.com

https://jiexinseal.en.alibaba.com/

Address: Sanhe Industrial Zone, Hengkeng, Liaobu Town, Dongguan, Guangdong



JIEXIN MECHANICAL SEAL CO., LTD

Contact: Huo Yuwei

WhatsApp: +0086 13925553104

Email: a13925553104@163.com

https://jiexinseal.en.alibaba.com/

Address: Sanhe Industrial Zone, Hengkeng, Liaobu Town, Dongguan, Guangdong



Mechanical seal JX-MG1

Temperature: -20°C~140°C

Pressure: ≤1.4 mpa

Speed: ≤15m/sec

Materials


Rotary ring: Carbon / SIC / TC

Stationary ring: Ceramic / SIC / TC.


Bellows: NBR / EPDM / VITON.

Spring: SS304 / SS316.

Metal parts: SS304 / SS316.

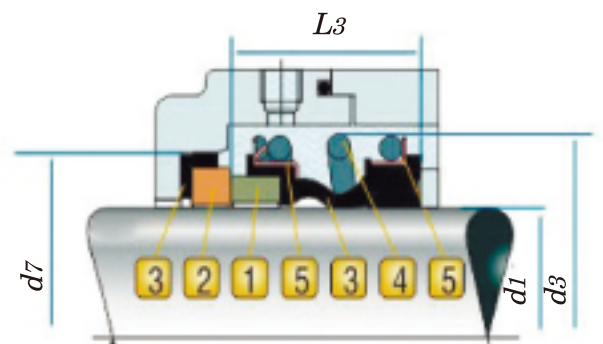

Type of counter ring

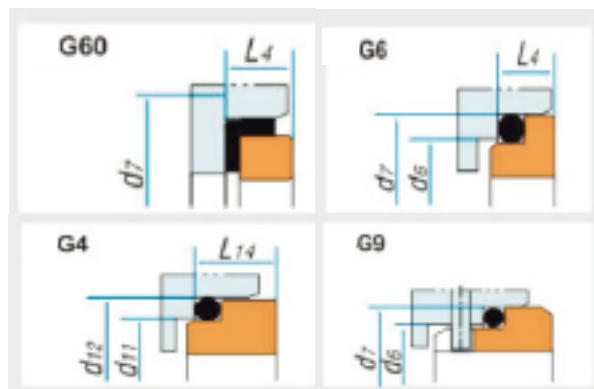

Single end seal (pump cup) MG1, with an elastomeric bellows, unloaded, with a central spring, independent of the direction of rotation of the shaft.

Used in centrifugal pumps, mixers, and other equipment that includes rotating mechanisms for water and drainage water. It can be used for Alfa Laval, Ebara (3M, DWO), Lowara, KSB tanorm, Etachrom), WILO (MVI, MHI, IPL/DPL), Grundfos (CDM), Saer (IP) mps and many others.

Analog of mechanical seals: Burgmann MG1, AESSEAL B02, Flowserve PacSeal 190, ROTEN L3, Vulcan Type 19, ANGA A1, Sterling SMG1, Hermetica 212.N2



Mechanical seal JX-MG12

Temperature: -20°C~140°C

Pressure: ≤1.4 mpa

Speed: ≤15m/sec

Materials


Rotary ring: Carbon / SIC / TC

Stationary ring: Ceramic / SIC / TC.

Bellows: NBR / EPDM / VITON.

Spring: SS304 / SS316.

Metal parts: SS304 / SS316.

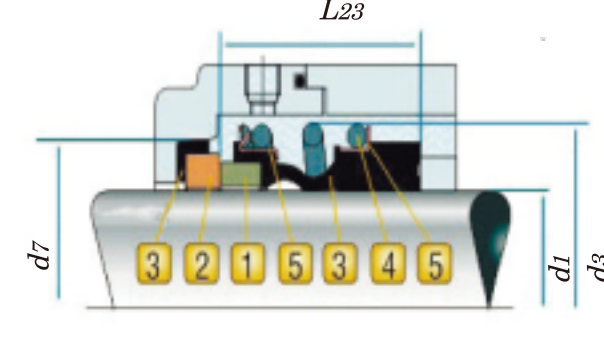

Type of counter ring



Single mechanical seal JX-MG12

Used in pumps: Alfa Laval, Ebara (3M, DWO), Lowara, KSB (Etanorm, Etachrom), WILO (MVI, MHI, IPL/DPL), Grundfos (CDM), Saer (IP), and many others.

Analogue: Burgmann MG12, AESSEAL B012, Flowserve Pac-Seal 192, ROTEN 3, Vulcan Type 192, ANGA A1, Sterling SMG12, Hermetica 212.

d1 (h6)	d3 (Max)	d7 (H8)	L23 (±0.5)	L4	d12 (H8)	L14
10	22,5	21,0	25,9	6,6	19,2	6,6
12	25,0	23,0	25,9	6,6	21,6	5,6
14	28,5	25,0	28,4	6,6	24,6	5,6
15	28,5	27,0	28,4	6,6	24,6	6,6
16	28,5	27,0	28,4	6,6	28,0	7,5
18	32,0	33,0	30,0	7,5	30,0	8,0
19	36,5	35,0	30,0	7,5	35,0	7,5
20	37,0	35,0	30,0	7,5	35,0	7,5
22	37,0	37,0	30,0	7,5	35,0	7,5
24	42,5	39,0	32,5	7,5	38,0	7,5
25	42,5	40,0	32,5	7,5	38,0	7,5
28	49,0	43,0	35,0	7,5	42,0	9,0
30	49,0	45,0	35,0	7,5	45,0	10,5
32	53,5	48,0	35,0	7,5	48,0	10,5
33	53,5	48,0	35,0	7,5	50,0	11,0
35	57,0	50,0	35,0	7,5	52,0	11,0
38	59,0	56,0	36,0	9,0	55,0	10,3
40	62,0	58,0	36,0	9,0	58,0	10,8
42	65,5	61,0	36,0	9,0	62,0	12,0
43	65,5	61,0	36,0	9,0	62,0	12,0
45	68,0	63,0	36,0	9,0	64,0	11,6
48	70,5	66,0	36,0	9,0	68,4	11,6
50	74,0	70,0	38,0	9,5	69,3	11,6
53	78,5	73,0	36,5	11,0	72,3	12,3
55	81,0	75,0	36,5	11,0	75,4	13,3
58	85,5	78,0	41,5	11,0	78,4	13,3
60	88,5	80,0	41,5	11,0	80,4	13,3
65	93,5	85,0	41,5	11,0	85,4	13,0
68	96,5	90,0	41,2	11,3	91,5	13,7
70	99,5	92,0	48,7	11,3	92,0	13,0
75	107,0	97,0	48,7	11,3	99,0	14,0
80	112,0	105,0	48,0	12,0	104,0	15,0
85	120,0	110,0	46,0	14,0	109,0	14,8
90	127,0	115,0	51,0	14,0	114,0	14,8
95	132,0	120,0	51,0	14,0	120,3	15,8
100	137,0	125,0	51,0	14,0	123,3	15,8



JIEXIN MECHANICAL SEAL CO., LTD

Contact: Huo Yuwei

WhatsApp: +0086 13925553104

Email: a13925553104@163.com

https://jiexinseal.en.alibaba.com/

Address: Sanhe Industrial Zone, Hengkeng, Liaobu Town, Dongguan, Guangdong



JIEXIN MECHANICAL SEAL CO., LTD

Contact: Huo Yuwei

WhatsApp: +0086 13925553104

Email: a13925553104@163.com

https://jiexinseal.en.alibaba.com/

Address: Sanhe Industrial Zone, Hengkeng, Liaobu Town, Dongguan, Guangdong



Mechanical seal JX-MG13

Temperature: -20°C~140°C

Pressure: ≤1.4 mpa

Speed: ≤15m/sec

Materials


Rotary ring: Carbon / SIC / TC

Stationary ring: Ceramic / SIC / TC.


Bellows: NBR / EPDM / VITON.

Spring: SS304 / SS316.

Metal parts: SS304 / SS316.

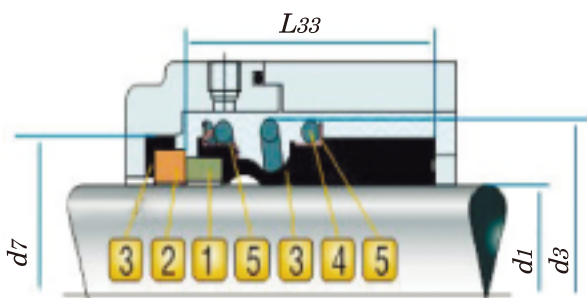

Type of counter ring

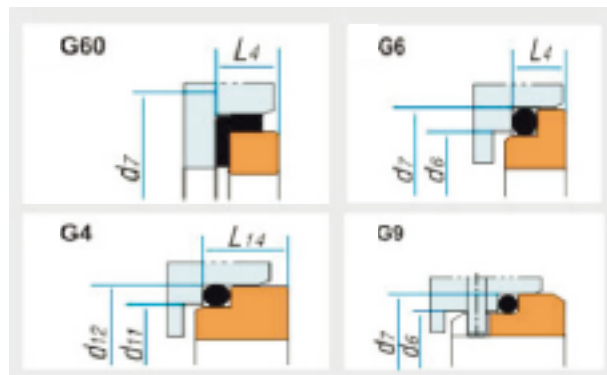

Single mechanical seal JX-MG13

Used in pumps: Alfa Laval, Ebara (3M, DWO), Lowara, KSB (Etanorm, Etachrom), WILO (MVI, MHI, IPL/DPL), Grundfos (CDM), Saer (IP), and many others.

Analogue: Burgmann MG13, AESSEAL B02, Flowserve Pac-Seal 193, ROTEN L3, Vulcan Type 193, ANGA A1, Sterling SMG13, Hermetica 212.



Mechanical seal JX-BIA

Temperature: -20°C~150°C

Pressure: ≤1.7 mpa

Speed: ≤13m/sec

Materials


Rotary ring: Carbon / SIC

Stationary ring: Ceramic / SIC / TC.


Bellows: NBR / EPDM / VITON.

Spring: SS304 / SS316.

Metal parts: SS304 / SS316.

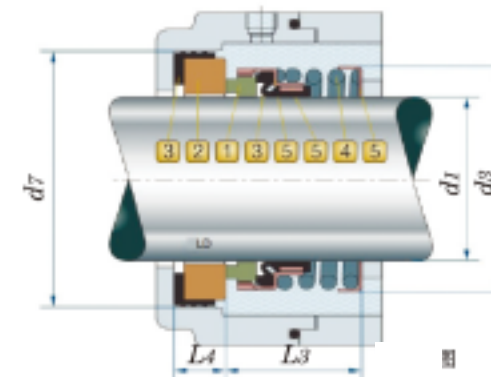

Type of counter ring

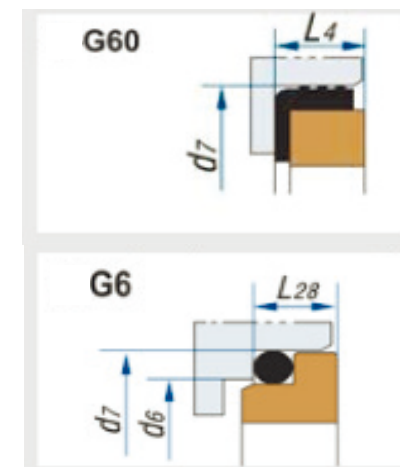

Mechanical seal JX-BIA

It is applied to pumps of the Haigh, Hidrostat, Hilge, Inbeat, INOX series and another pumps.

Analog JBurgmann MG920/ D1-G50 seal.Crane 2 (N SEAT) seal.Flowserve 200 seal Latty T200

JX-BIA	d1	d3	d7	L3	L4
10	22,5	21,0	23,90	8,60	
12	25,0	23,00	23,90	8,60	
14	28,5	25,00	26,40	8,60	
16	28,5	27,00	26,40	8,60	
18	30,5	33,00	27,50	10,00	
20	34,00	35,00	27,50	10,00	
22	36,00	37,00	27,50	10,00	
24	40,00	39,00	30,00	10,00	
25	40,00	40,00	30,00	10,00	
28	42,00	43,00	32,50	10,00	
30	45,00	45,00	32,50	10,00	
32	47,00	48,00	32,50	10,00	
33	47,00	48,00	32,50	10,00	
35	50,00	50,00	32,50	10,00	
38	55,00	56,00	34,00	11,00	
40	57,00	58,00	34,00	11,00	
43	59,00	61,00	34,00	11,00	
45	61,50	63,00	34,00	11,00	
48	65,50	66,00	34,00	11,00	
50	67,50	70,00	34,50	13,00	
53	70,50	73,00	34,50	13,00	
55	72,00	75,00	34,50	13,00	
58	78,50	78,00	39,50	13,00	
60	80,00	80,00	39,50	13,00	
63	83,00	83,00	39,50	13,00	
65	84,50	85,00	39,50	13,00	
68	88,00	90,00	37,20	15,30	
70	90,00	92,00	44,70	15,30	
75	99,00	97,00	44,70	15,30	
80	104,00	105,00	44,30	15,70	

JX-BIA	d1	d3	d7	L3	L4
14	24,50	30,00	18,70	5,00	
16	26,50	32,00	21,00	5,00	
18	30,50	35,00	22,50	7,50	
20	34,00	35,00	21,00	8,00	
24	40,00	39,00	25,50	8,00	
25	40,00	40,00	25,50	8,00	
28	42,00	43,00	25,50	8,00	
30	45,00	45,00	25,50	9,00	
32	47,00	48,00	33,50	9,00	
33	47,00	48,00	33,50	9,00	
35	50,00	50,00	33,50	9,00	
38	55,00	56,00	33,50	9,00	
40	57,00	58,00	33,50	9,00	
45	61,50	63,00	38,00	9,50	
48	65,50	66,00	38,00	9,50	
50	67,50	70,00	38,00	9,50	
53	70,50	73,00	41,00	9,50	
55	72,00	75,00	41,00	9,50	
58	78,50	78,00	42,00	9,50	
60	80,00	80,00	42,00	9,50	
65	84,50	85,00	43,00	9,50	
70	90,00	92,00	45,00	11,00	
75	99,00	97,00	48,00	12,00	
80	104,00	104,00	55,00	12,00	
65	84,50	85,00	39,50	13,00	
68	88,00	90,00	37,20	15,30	
70	90,00	92,00	44,70	15,30	
75	99,00	97,00	44,70	15,30	
80	104,00	105,00	44,30	15,70	



JIEXIN MECHANICAL SEAL CO., LTD

Contact: Huo Yuwei

WhatsApp: +0086 13925553104

Email: a13925553104@163.com

https://jiexinseal.en.alibaba.com/

Address: Sanhe Industrial Zone, Hengkeng, Liaobu Town, Dongguan, Guangdong



JIEXIN MECHANICAL SEAL CO., LTD

Contact: Huo Yuwei

WhatsApp: +0086 13925553104

Email: a13925553104@163.com

https://jiexinseal.en.alibaba.com/

Address: Sanhe Industrial Zone, Hengkeng, Liaobu Town, Dongguan, Guangdong



Mechanical seal JX-560A

Temperature: -20°C~150°C

Pressure: ≤1.5 mpa

Speed: ≤13m/sec

Materials


Rotary ring: Carbon / SIC

Stationary ring: Ceramic / SIC / TC.

Bellows: NBR / EPDM / VITON.

Spring: SS304 / SS316.

Metal parts: SS304 / SS316.

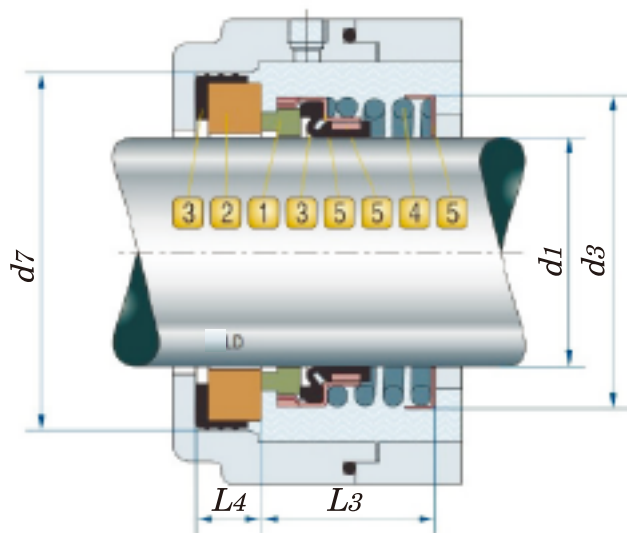

The mechanical end seal JX-560A

The seals are capable of self-regulation due to the freely inserted rotatyring, as well as the Hilge, Inbeat, INOX series and another pumps.high axial mobility of the bellows. The R-560A and misalignments.

Areas of application: processing and chemical industry, water supply and wastewater treatment systems, glycols, oils, submersible pumps, motor pumps, circulation pumps.Hilge, Inbeat, INOX series and another pumps.

It is applied to pumps of the Haigh, Hidrostal, Hilge, Inbeat, INOX series and another pumps.

Analogue: JX560A Burgmann, John Crane 6, AESSEAL B04

JX-560A

d1 (H6)	d3 (Max)	d7 (h8)	L3 (±0.5)	L4
8	20,50	21,00	11,50	6,50
9	20,50	24,00	16,50	6,50
10	20,50	24,00	16,50	6,50
11	22,50	24,00	16,50	6,50
12	22,50	26,00	17,50	6,50
13	24,50	26,00	17,50	6,50
14	24,50	28,00	18,50	6,50
15	26,50	28,00	18,50	6,50
16	26,50	32,00	20,00	7,00
17	26,50	32,00	20,00	7,00
18	30,50	35,00	20,00	7,00
19	30,50	35,00	20,00	7,00
20	34,00	38,00	19,50	8,50
22	36,00	40,00	19,50	8,50
24	40,00	44,00	20,50	8,50
25	40,00	44,00	20,50	8,50
28	42,00	46,00	21,00	9,00
30	45,00	50,00	22,00	9,00
32	47,00	54,00	24,00	9,00
35	50,00	58,00	25,50	10,50
38	55,00	60,00	26,50	10,50
40	57,00	64,00	27,00	11,00
45	61,50	66,00	29,00	11,00
48	65,50	67,00	31,00	11,00
50	67,50	72,00	31,00	11,00
54	72,00	76,20	42,80	14,20
55	72,00	79,40	42,80	14,20
58	78,50	79,40	42,80	14,20
60	80,00	82,50	45,80	14,20
65	84,50	85,70	49,00	16,00
70	90,00	88,90	49,00	16,00
73	94,00	95,30	53,00	16,00
75	99,00	98,40	53,00	16,00



Mechanical seal JX-101

Temperature: -20°C~80°C

Pressure: ≤0.4 mpa

Speed: ≤3000/rpm

Materials


Rotary ring: Ceramic / SIC .

Stationary ring: Car / SIC .

Bellows: NBR / VITON.

Spring: SS304 / SS316.

Metal parts: SS304 / SS316.

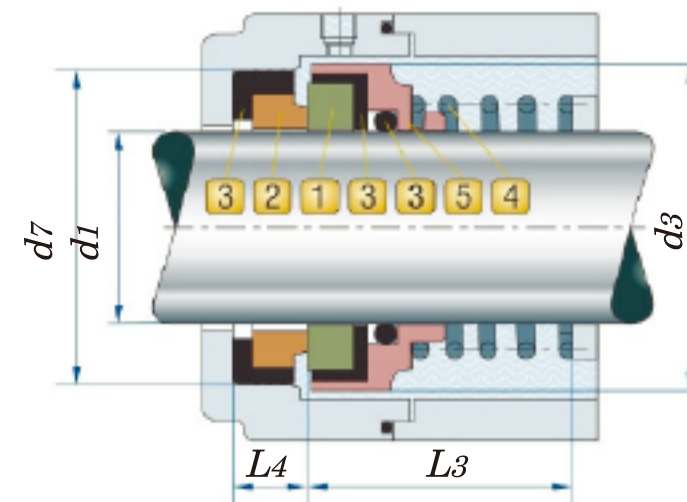

Single mechanical end seal with conical spring JX-101.

Used in various pumps, compressors, blending and mixing machines.

Analogue: AESSEAL T07 / T07D / T07X, Roten UNITEN 22, Hecker HN 400A.

d1 (H6)	d3 (Max)	d6 (h8)	d7 (±0.5)	L3	L4 (h8)
16	30.0	23.0	35	22	8
25	42.5	29.5	41	31	9
35	54.0	41.0	52	36	9



JIEXIN MECHANICAL SEAL CO., LTD

Contact: Huo Yuwei

WhatsApp: +0086 13925553104

Email: a13925553104@163.com

https://jiexinseal.en.alibaba.com/

Address: Sanhe Industrial Zone, Hengkeng, Liaobu Town, Dongguan, Guangdong



JIEXIN MECHANICAL SEAL CO., LTD

Contact: Huo Yuwei

WhatsApp: +0086 13925553104

Email: a13925553104@163.com

https://jiexinseal.en.alibaba.com/

Address: Sanhe Industrial Zone, Hengkeng, Liaobu Town, Dongguan, Guangdong



Mechanical seal JX-102

Temperature: -20°C~80°C

Pressure: ≤0.3 mpa

Speed: ≤3000 rpm

Materials


Rotary ring: Ceramic

Stationary ring: Ceramic

Bellows: NBR

Spring: SS304 / SS316.

Metal parts: SS304 / SS316.

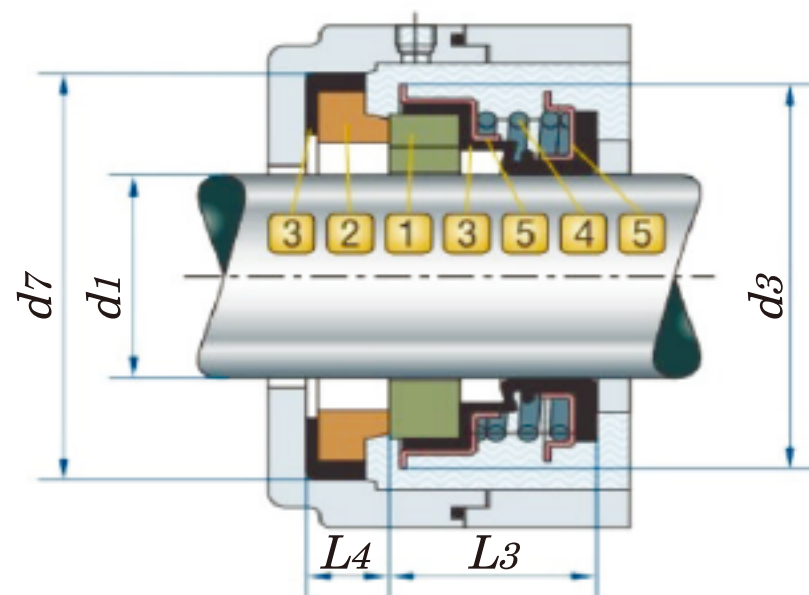

d1 (H6)	d3 (Max)	d7 (h8)	L3 (±0.5)	L4	L7
14	33	35	17.5	7	13
18	37	40	17.5	7	13
20	38	40	18.0	7	15



Mechanical seal JX-103

Temperature: -20°C~120°C

Pressure: ≤0.4 mpa

Speed: ≤3000 rpm

Materials


Rotary ring: Car/Cer/SIC

Stationary ring: Ceramic/SIC

Bellows: NBR/EPDM.

Spring: SS304 / SS316.

Metal parts: SS304 / SS316.

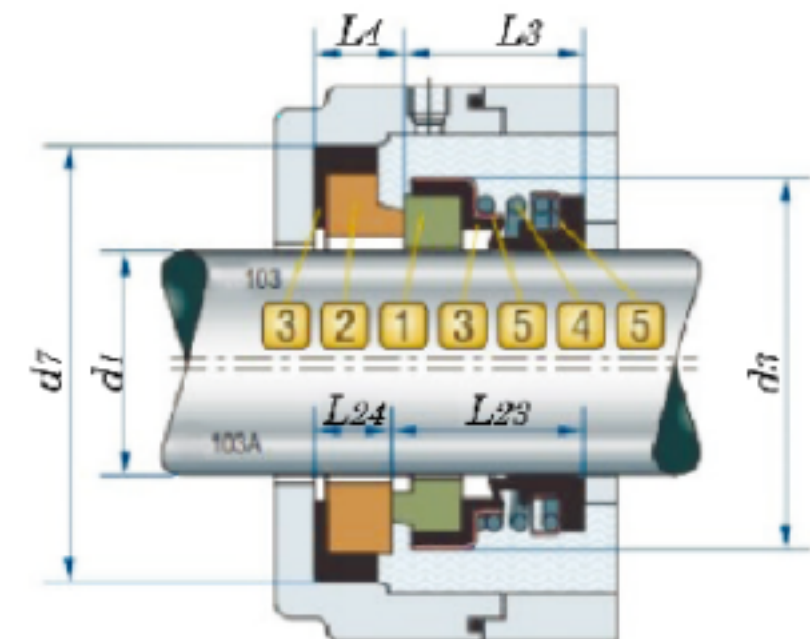

d1	d3	d7	L3	L4	L23	L24
10	22	26	15	5,5	15,5	5
12	23,5	26	15	5,5	15,5	5
12	23,5	26	15	8	15	8
14	27	30	13,5	7	15	5,5
17	30	35	14	7	15,2	5,8
18	30	35	14	7	15,2	5.8



JIEXIN MECHANICAL SEAL CO., LTD

Contact: Huo Yuwei

WhatsApp: +0086 13925553104

Email: a13925553104@163.com

https://jiexinseal.en.alibaba.com/

Address: Sanhe Industrial Zone, Hengkeng, Liaobu Town, Dongguan, Guangdong



Mechanical seal JX-108

Temperature: -20°C~180°C

Pressure: ≤0.6mpa

Speed: ≤10m/sec

Materials


Rotary ring: Carbon/SIC/TC/Ceramic.

Stationary ring: Ceramic/SIC/TC.

Bellows: NBR / EPDM / VITON.

Spring: SS304 / SS316.

Metal parts: SS304 / SS316.

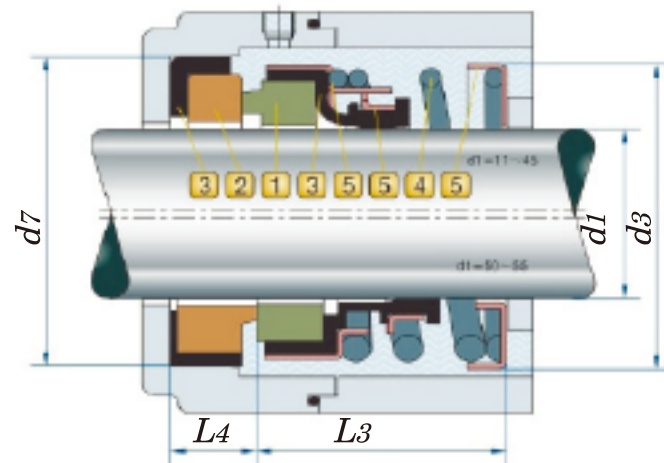

Single mechanical seal JX-108

Used in Hidrosta, Wilo, Inbeat, Grundfos, Haigh, Hilde, INOX, Inoxpa, Jabsco, Johnson and another pumps.

Analogue: Burgmann MG910/ D1-G50, John Crane 1A (N SEAT), 100 Flowserve, Latty T100, Roten 51.



JIEXIN MECHANICAL SEAL CO., LTD

Contact: Huo Yuwei

WhatsApp: +0086 13925553104

Email: a13925553104@163.com

https://jiexinseal.en.alibaba.com/

Address: Sanhe Industrial Zone, Hengkeng, Liaobu Town, Dongguan, Guangdong



Mechanical seal JX-155/155B

Temperature: -20°C~180°C

Pressure: ≤1.4 mpa

Speed: ≤15m/sec

Materials


Rotary ring: Ceramic / SIC / TC.

Stationary ring: Carbon / SIC / TC.

Bellows: NBR / EPDM / VITON.

Spring: SS304 / SS316.

Metal parts: SS304 / SS316.

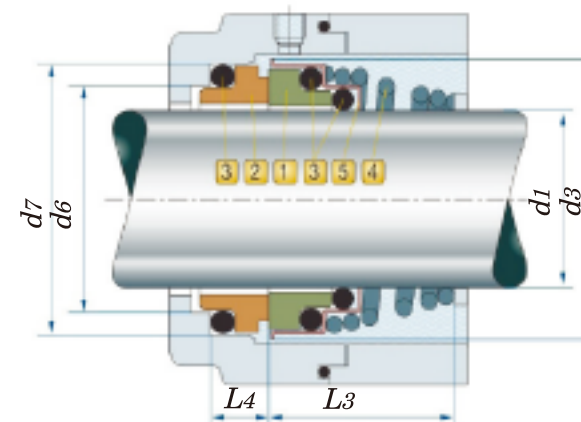

Mechanical seal JX-155/155B

It can be used in pumps: Lowara (CEA120), Calpeda (NM, MXH, MPC, GXC/GXV), Ebara (CDX, 2CDX, CDXM), Pedrolo (F) and many others.

Analog of mechanical seals: Burgmann BT - FN, Roten 3, Vulcan 13. DIMER TCO.15-7, Lidering

d1 (H6)	d3 (Max)	d7 (h8)	L3	L4
8	17,00	15,00	14,70	5,30
8	17,00	21,00	14,70	5,30
9	21,00	21,00	14,70	5,30
10	21,00	21,00	14,70	5,30
11	23,00	24,00	14,70	5,30
12	23,00	26,00	14,70	5,30
14	25,50	26,00	19,70	5,30
15	27,50	27,00	19,70	5,30
16	27,50	27,00	19,70	5,30
17	32,50	33,00	19,70	5,30
17	32,50	35,00	19,70	5,30
18	32,50	33,00	19,70	5,30
19	33,00	35,00	19,20	5,80
20	33,00	35,00	19,20	5,80
22	38,00	37,00	21,80	6,20
25	40,00	40,00	25,00	7,50
28	43,00	43,00	27,00	8,00
30	45,50	45,00	27,00	8,00
35	51,00	50,00	29,00	8,00
40	57,50	58,00	30,50	9,50
45	63,00	63,00	30,50	9,50
50	71,00	70,00	33,50	11,50
55	75,50	75,00	33,50	11,50

JX-155	d1 (H6)	d3 (Max)	d6 (h8)	d7 (±0.5)	L3	L4 (h8)
10	20,0	14,0	18,1	15,0	5,5	5,5
11	22,0	16,5	20,6	18,0	5,5	5,5
12	22,0	16,5	20,6	18,0	5,5	5,5
13	25,0	18,5	23,1	22,0	6,0	6,0
14	25,0	18,5	23,1	22,0	6,0	6,0
15	29,0	21,5	26,9	23,0	7,0	7,0
16	29,0	21,5	26,9	23,0	7,0	7,0
17	29,0	21,5	26,9	23,0	7,0	7,0
18	33,0	24,5	30,9	24,0	8,0	8,0
19	33,0	26,0	30,9	25,0	8,0	8,0
20	33,0	26,0	30,9	25,0	8,0	8,0
21	38,0	29,0	35,4	25,0	8,0	8,0
22	38,0	29,0	35,4	25,0	8,0	8,0
23	38,0	29,0	35,4	27,0	8,0	8,0
24	38,0	29,0	35,4	27,0	8,0	8,0
25	40,0	31,5	38,2	27,0	8,5	8,5
28	46,0	37,5	43,3	30,0	9,0	9,0
29	46,0	37,5	43,3	30,0	9,0	9,0
30	46,0	37,5	43,3	30,0	9,0	9,0
32	46,0	37,5	43,3	30,0	9,0	9,0
33	48,0	45,0	53,5	39,0	11,5	11,5
35	50,0	45,0	53,5	39,0	11,5	11,5
38	58,0	52,0	60,5	39,0	11,5	11,5
40	58,0	52,0	60,5	39,0	11,5	11,5
JX-155B	d1 (H6)	d3 (Max)	d6 (h8)	d7 (±0.5)	L3	L4 (h8)
10	20,0	17,0	21,0	15,0	7,0	7,0
12	22,0	19,0	23,0	18,0	7,0	7,0
14	25,0	21,0	25,0	22,0	7,0	7,0
16	29,0	23,0	27,0	23,0	7,0	7,0
18	33,0	27,0	33,0	24,0	10,0	10,0
20	33,0	29,0	35,0	25,0	10,0	10,0
22	38,0	31,0	37,0	25,0	10,0	10,0
24	38,0	33,0	39,0	27,0	10,0	10,0
25	40,0	34,0	40,0	27,0	10,0	10,0
28	46,0	37,0	43,0	29,0	10,0	10,0
30	46,0	39,0	45,0	30,0	10,0	10,0
32	46,0	42,0	48,0	30,0	10,0	10,0
33	48,0	42,0	48,0	39,0	10,0	10,0
35	50,0	44,0	50,0	39,0	10,0	10,0
38	58,0	49,0	56,0	42,0	13,0	13,0
40	58,0	51,0	58,0	42,0	13,0	13,0



JIEXIN MECHANICAL SEAL CO., LTD

Contact: Huo Yuwei

WhatsApp: +0086 13925553104

Email: a13925553104@163.com

https://jiexinseal.en.alibaba.com/

Address: Sanhe Industrial Zone, Hengkeng, Liaobu Town, Dongguan, Guangdong



JIEXIN MECHANICAL SEAL CO., LTD

Contact: Huo Yuwei

WhatsApp: +0086 13925553104

Email: a13925553104@163.com

https://jiexinseal.en.alibaba.com/

Address: Sanhe Industrial Zone, Hengkeng, Liaobu Town, Dongguan, Guangdong



Mechanical seal JX-156

Temperature: -20°C~80°C

Pressure: ≤0.4mpa


Speed: ≤10m/sec

Materials

Rotary ring: Carbon.

Stationary ring: Ceramic

Bellows: NBR / EPDM / VITON.

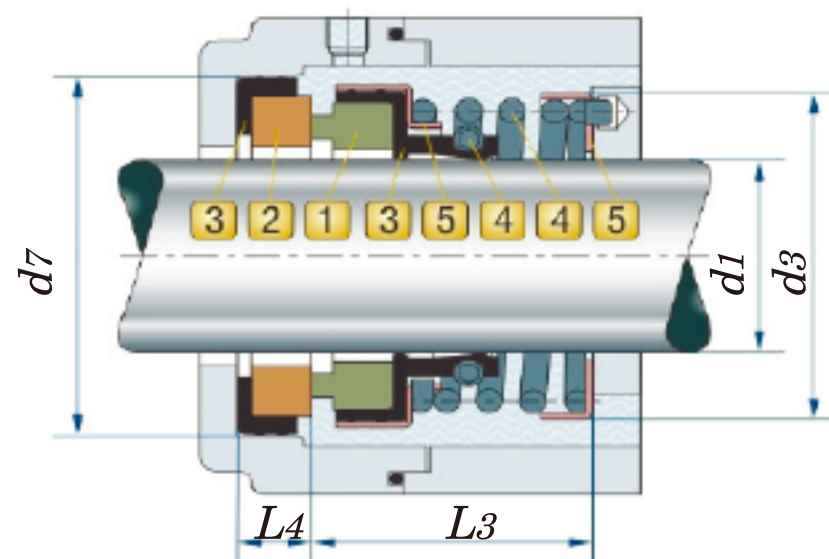

d1 (H6)	d3 (Max)	d7 (h8)	L3 (±0.5)	L4
8	16,00	18,00	11,50	6,50
9	20,00	21,00	16,50	6,50
10	20,00	22,00	16,50	6,50
11	20,00	24,00	16,50	6,50
12	22,50	26,00	17,50	6,50
13	22,50	26,00	17,00	7,00
14	24,50	28,00	18,00	7,00
15	24,50	28,00	18,00	7,00
16	28,50	32,00	19,00	8,00



Mechanical seal JX-166

Temperature: -20°C~150°C

Pressure: ≤0.5 mpa

Speed: ≤10m/sec

Materials


Rotary ring: Carbon / SIC.

Stationary ring: Ceramic/SIC

Bellows: NBR / EPDM / VITON.

Spring: SS304 / SS316.

Metal parts: SS304 / SS316.

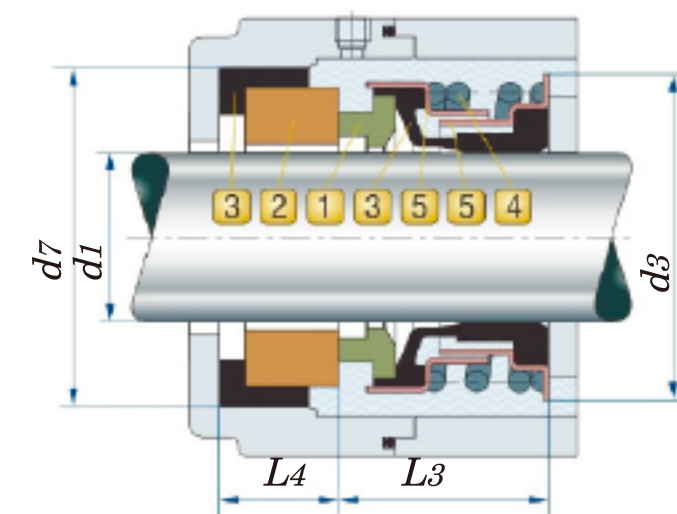

d1	d1(mm)	d3	d7	L3	L4
0.375	9,53	23,60	22,23	16,66	7,14
0.375S	9,53	23,60	22,23	16,66	6,35
0.437	11,10	23,60	25,40	16,66	7,92
0.500	12,70	23,60	25,40	16,66	7,92
0.500S	12,70	23,60	25,40	16,66	6,35
0.625	15,87	30,10	31,75	18,24	10,31
0.750	19,05	33,10	34,93	18,24	10,31
0.875	22,22	36,30	38,10	20,62	10,31
1.000	25,40	39,40	41,28	20,62	11,10



JIEXIN MECHANICAL SEAL CO., LTD

Contact: Huo Yuwei

WhatsApp: +0086 13925553104

Email: a13925553104@163.com

https://jiexinseal.en.alibaba.com/

Address: Sanhe Industrial Zone, Hengkeng, Liaobu Town, Dongguan, Guangdong



Mechanical seal JX-E

Temperature: -20°C~150°C

Pressure: ≤0.5 mpa

Speed: ≤3600 rpm

Materials


Rotary ring: Carbon / SIC.

Stationary ring: Ceramic/SIC

Bellows: NBR / EPDM / VITON.

Spring: SS304 / SS316.

Metal parts: SS304 / SS316.

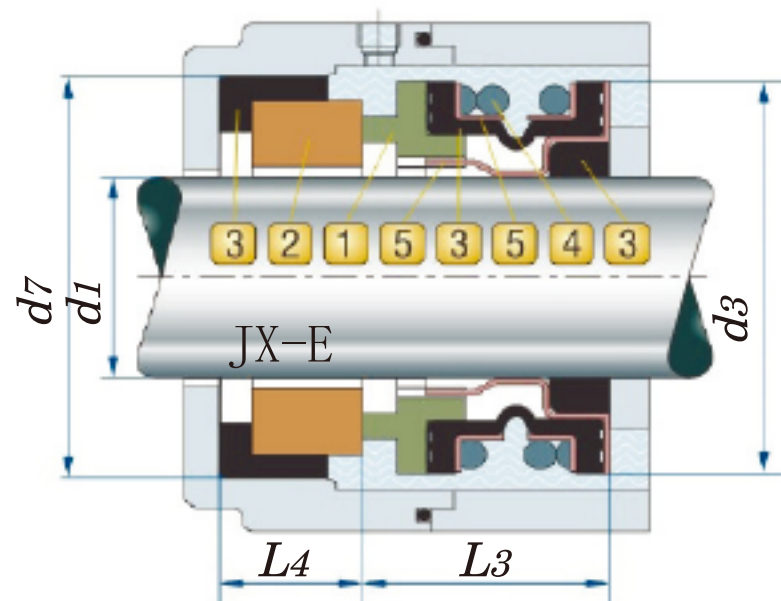

d1	d1(mm)	d2	d3	d7	L3	L4
0.375	9,53	20,60	27,00	25,40	16,66	7,92
0.437	11,10	20,60	27,00	25,40	16,66	7,92
0.500	12,70	20,60	27,00	25,40	16,66	7,92
0.500S	12,70	20,60	27,00	25,40	16,66	6,35
0.562	14,27	23,80	30,90	31,75	18,24	10,31
0.625	15,87	23,80	30,90	31,75	18,24	10,31
0.687	17,45	27,00	34,10	34,93	18,24	10,31
0.750	19,05	27,00	34,10	34,93	18,24	10,31
0.875	22,22	33,30	42,80	38,10	20,62	10,31
1.000	25,40	33,30	42,80	41,28	20,62	11,10



JIEXIN MECHANICAL SEAL CO., LTD

Contact: Huo Yuwei

WhatsApp: +0086 13925553104

Email: a13925553104@163.com

https://jiexinseal.en.alibaba.com/

Address: Sanhe Industrial Zone, Hengkeng, Liaobu Town, Dongguan, Guangdong



Mechanical seal JX-202/208

Temperature: -20°C~80°C

Pressure: ≤0.16 mpa

Speed: ≤15m/sec

Materials


Rotary ring: Carbon / SIC / TC.

Stationary ring: Carbon / Ceramic/ SIC / TC.

Bellows: NBR/VITON.

Spring: SS304 / SS316.

Metal parts: SS304 / SS316.

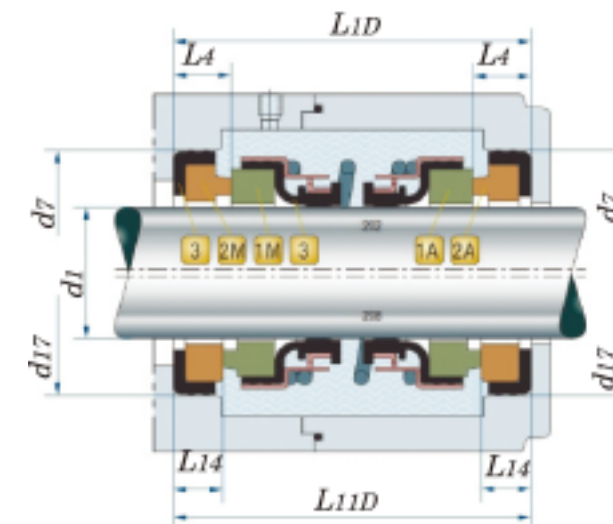

Double-sided mechanical seal JX-202/208

Is applicable to the series pumps:

Haigh, Hidrostal, Hilde, Inbeat, INOX, Inoxpa, Jabasco, Johnson, KSB, Lowara, Mouvox, Nissin, KSB, Lowara, Mouvox, Nissin, and another pumps.

Analogue: EA560D Burgmann, John Crane 6, AESSEAL B04

JX-202

d1 (H6)	d3 (Max)	d7 (h8)	L10D (±0.5)	L4
14	25.5	26/28	38/42	7.0
16	27.5	28/30	38/45	7.0
17	32.5	34/35	38/43/48	7.0
18	32.5	34/35	38/43/48	7.0
20	33.0	36	40/42/47	7.0
22	38.0	38	45	7.0
25	40.0	41	51	9.0
30	45.5	46	51	9.0
35	51.0	51	51	9.0
40	57.5	60	61	10.5
45	63.0	65	61	10.5

JX-208

d1 (H6)	d3 (Max)	D17 (h8)	L11D (±0.5)	L14
10	21.0	21	30	5.3
12	23.0	23/24/26	32	5.3
14	25.5	25/26/28	35/38/42	5.3
15	27.5	27/28/30	38/45	5.3
16	27.6	27/28/30	38/45	5.3
17	32.5	33/34/35	38/43/48	5.3
18	32.5	33/34/35	38/43/48	5.3
20	33.0	35/36	40/42/47	5.8
22	38.0	37/38	45	6.2
25	40.0	40/41	48/51	7.5
28	43.0	43	51	8.0
30	45.5	45	51	8.0
35	51.0	50	51	8.0
40	57.6	58	61	9.5
45	63.0	63	61	9.5



JIEXIN MECHANICAL SEAL CO., LTD

Contact: Huo Yuwei

WhatsApp:+0086 13925553104

Email:a13925553104@163.com

https://jiexinseal.en.alibaba.com/

Address: Sanhe Industrial Zone, Hengkeng, Liaobu Town, Dongguan, Guangdong



JIEXIN MECHANICAL SEAL CO., LTD

Contact: Huo Yuwei

WhatsApp:+0086 13925553104

Email:a13925553104@163.com

https://jiexinseal.en.alibaba.com/

Address: Sanhe Industrial Zone, Hengkeng, Liaobu Town, Dongguan, Guangdong



Mechanical seal JX-T2/FBD

Temperature: -20°C~200°C

Pressure: ≤1.7 mpa

Speed: ≤13m/sec

Materials


Rotary ring: Carbon / SIC / TC.

Stationary ring: Ceramic / SIC / TC.


Bellows: NBR / EPDM / VITON.

Spring: SS304 / SS316.

Metal parts: SS304 / SS316.

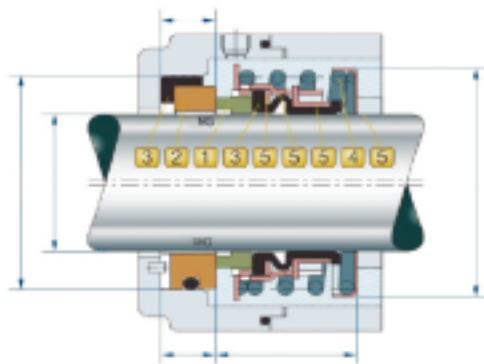

Type of counter ring

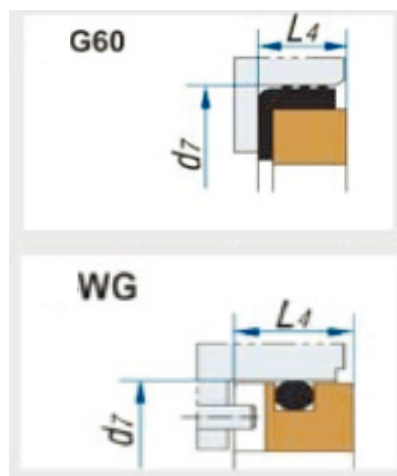

Mechanical seal JX-T2/FBD

Applicable to KSB Omega, RDLO, AmarexN, Ama, Etaline, HGM, CHTC, CHTD

Analog John Crane Type 2(US standart), Vulcan A5 / A5J.



Mechanical seal JX-T1/FBC

Temperature: -40°C~200°C

Pressure: ≤1.7 mpa

Speed: ≤13m/sec

Materials


Rotary ring: Carbon / SIC / TC.

Stationary ring: Ceramic / SIC / TC.


Bellows: NBR / EPDM / VITON.

Spring: SS304 / SS316.

Metal parts: SS304 / SS316.

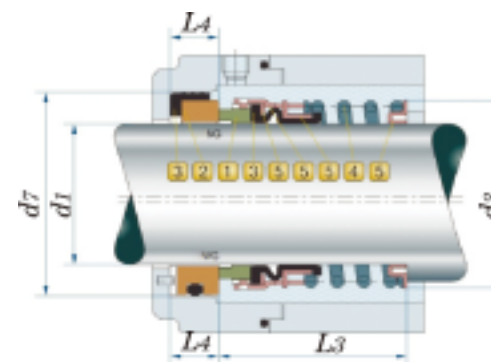

Type of counter ring

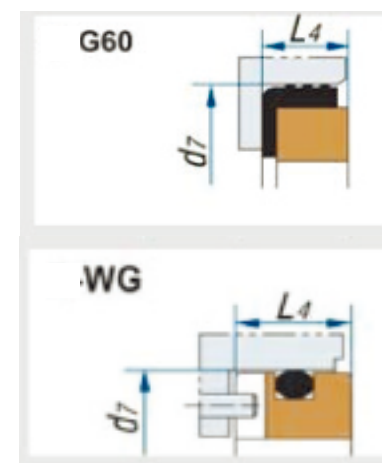

Mechanical seal JX-T1/FBC

Applicable to KSB Omega, RDLO, Amarex N, Ama, Etaline, HGM, CHTC, CHTD.

Analog John Crane Type 1, Vulcan A5 / A5J.

JX-FBC	d1 (H6)	d3 (Max)	d7 (h8)	L3 (±0.5)	L4
16	29,00	30,00	34,00	34,00	8,00
18	31,00	32,00	34,00	34,00	8,00
20	33,00	34,00	34,00	34,00	8,00
22	35,00	36,00	34,00	34,00	8,00
25	38,00	39,00	37,00	37,00	8,00
28	42,00	43,00	38,00	38,00	8,00
30	45,00	48,00	38,00	38,00	8,00
35	49,00	53,00	39,00	39,00	10,00
40	57,00	58,00	44,00	44,00	10,00
45	62,00	63,00	47,00	47,00	10,00
50	67,00	68,00	54,00	54,00	10,00
55	72,00	73,00	54,00	54,00	12,00
60	78,00	79,00	55,50	55,50	12,00
65	84,00	86,00	55,50	55,50	12,00
70	89,00	91,00	57,00	57,00	12,00
75	94,00	96,00	63,00	63,00	12,00
80	103,00	105,00	62,00	62,00	14,00
85	108,00	110,00	68,00	68,00	14,00
90	113,00	115,00	68,00	68,00	14,00
95	118,00	120,00	68,00	68,00	14,00
100	123,00	125,00	68,00	68,00	14,00

JX-T1	d1 (H6)	d3 (Max)	d7 (h8)	L3 (±0.5)	L4
0.750	19,05	30,90	34,92	33,32	10,30
0.875	22,23	34,10	38,10	34,93	10,30
1.000	25,40	38,10	41,27	39,67	11,10
1.125	28,58	41,30	44,45	41,28	11,10
1.250	31,75	46,00	47,62	41,28	11,10
1.375	34,93	47,60	50,80	42,85	11,10
1.500	38,10	50,80	53,97	42,85	11,10
1.625	41,28	57,20	60,33	50,80	12,70
1.750	44,45	60,30	63,50	50,80	12,70
1.875	47,63	63,50	66,68	53,98	12,70
2.000	50,80	66,70	69,85	53,98	12,70
2.125	53,98	71,40	76,20	60,33	14,30
2.250	57,15	74,60	79,37	60,33	14,30
2.375	60,33	77,80	82,55	63,50	14,30
2.500	63,50	80,90	85,72	63,50	14,30
2.625	66,68	85,70	85,73	69,85	15,90
2.750	69,85	88,90	88,90	69,85	15,90
2.875	73,03	92,10	95,25	73,03	15,90
3.000	76,20	95,30	98,42	73,03	15,90



JIEXIN MECHANICAL SEAL CO., LTD

Contact: Huo Yuwei

WhatsApp: +0086 13925553104

Email: a13925553104@163.com

https://jiexinseal.en.alibaba.com/

Address: Sanhe Industrial Zone, Hengkeng, Liaobu Town, Dongguan, Guangdong



Mechanical seal JX-70

Temperature: -40°C~150°C

Pressure: ≤0.4 mpa

Speed: ≤10m/sec

Materials


Rotary ring: Carbon/SIC/TC

Stationary ring: Ceramic/SIC/TC.

Bellows: NBR / VITON.

Spring: SS304 / SS316.

Metal parts: SS304 / SS316.

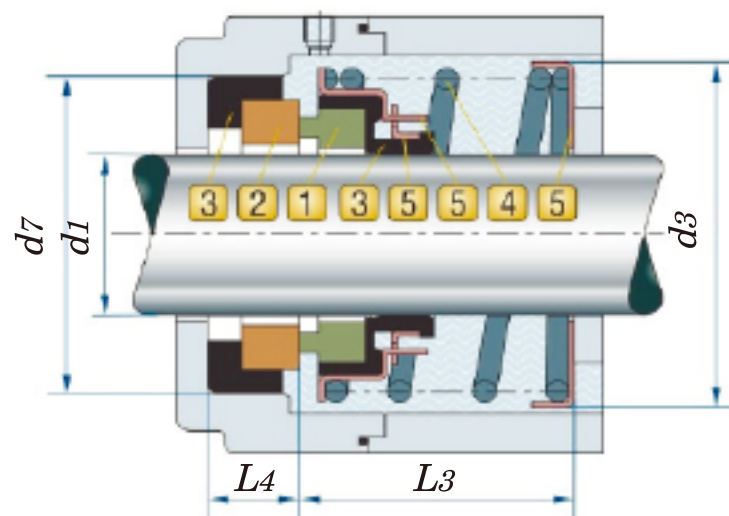

JX-70	d1 (h6)	d3 (Max)	d7 (H8)	L3 (±0.5)	L4
13	13	31,5	29,5	24,0	8,0
14	14	31,5	29,5	24,0	8,0
15	15	31,5	29,5	18,0	8,0
15H	15	31,5	29,5	24,0	8,0
16	16	31,5	29,5	18,0	8,0
16H	16	31,5	29,5	24,0	8,0
20	20	37,0	35,0	14,5	5,5
25	25	44,2	40,0	16,0	6,0
30	30	48,6	45,0	17,5	6,5
35	35	54,0	50,0	19,0	7,0
40	40	60,4	58,0	20,0	8,0



JIEXIN MECHANICAL SEAL CO., LTD

Contact: Huo Yuwei

WhatsApp: +0086 13925553104

Email: a13925553104@163.com

https://jiexinseal.en.alibaba.com/

Address: Sanhe Industrial Zone, Hengkeng, Liaobu Town, Dongguan, Guangdong



Mechanical seal JX-2100/2100K

Temperature: -20°C~140°C

Pressure: ≤1.6 mpa

Speed: ≤10m/sec

Materials


Rotary ring: Carbon / SIC / TC

Stationary ring: Ceramic / SIC / TC.


Bellows: NBR / EPDM / VITON.

Spring: SS304 / SS316.

Metal parts: SS304 / SS316.

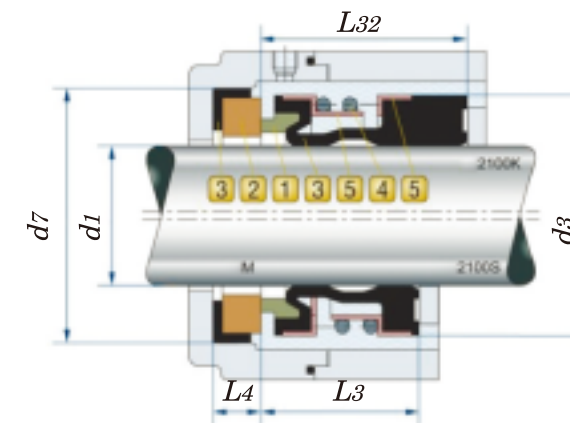

Type of counter ring

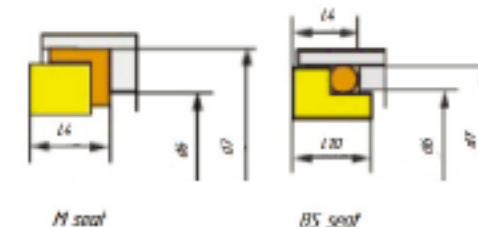

The rubber bellows shaft seal JX-2100/2100K is a compact mechanical seal with a single central spring and a rubber elastomeric bellows that ensures maximum efficiency and performance of your equipment in all conditions.

It can be used for Gorman-Rupp, Ebara (3M), WILO, ONC, SNC, ONC pumps and many others.

Analog of mechanical seals: John Crane 2100, 2100S, 2100K, Flowserve Pac-Seal 140 / 142 / 143, ANGA A4 / A41, Vulcan Type 14 / 142 / 143, Sterling 540 / 542 / 543, AESSEAL B09U

d1 (H6)	d3	d7 (Max)	L3 (h8)	L32 (±0.5)	L4
10	20,0	21,0	15,0	27,5	5,0
12	22,0	23,0	15,0	26,5	6,0
14	24,0	25,0	15,0	29,0	6,0
15	25,0	26,0	15,0	29,0	6,0
16	26,0	27,0	15,0	29,0	6,0
18	32,0	33,0	20,0	31,5	6,0
20	34,0	35,0	20,0	31,5	6,0
22	36,0	37,0	20,0	31,5	6,0
24	38,0	39,0	20,0	34,0	6,0
25	39,0	40,0	20,0	34,0	6,0
28	42,0	43,0	26,0	36,5	6,0
30	44,0	45,0	26,0	35,5	7,0
32	46,0	48,0	26,0	35,5	7,0
33	47,0	48,0	26,0	35,5	7,0
35	49,0	50,0	26,0	34,5	8,0
38	54,0	56,0	30,0	37,0	8,0
40	56,0	58,0	30,0	37,0	8,0
43	59,0	61,0	30,0	37,0	8,0
45	61,0	63,0	30,0	37,0	8,0
48	64,0	66,0	30,0	35,0	10,0
50	66,0	70,0	30,0	37,5	10,0
53	69,0	73,0	30,0	37,5	10,0
55	71,0	75,0	30,0	37,5	10,0
58	78,0	78,0	33,0	42,5	10,0
60	80,0	80,0	33,0	40,5	12,0
63	83,0	83,0	33,0	40,5	12,0
65	85,0	85,0	33,0	40,5	12,0
68	88,0	90,0	33,0	40,5	12,0
70	90,0	92,0	33,0	48,0	12,0
75	99,0	97,0	40,0	48,0	12,0



JIEXIN MECHANICAL SEAL CO., LTD

Contact: Huo Yuwei

WhatsApp:+0086 13925553104

Email:a13925553104@163.com

https://jiexinseal.en.alibaba.com/

Address: Sanhe Industrial Zone, Hengkeng, Liaobu Town, Dongguan, Guangdong



JIEXIN MECHANICAL SEAL CO., LTD


Contact: Huo Yuwei

WhatsApp:+0086 13925553104

Email:a13925553104@163.com

https://jiexinseal.en.alibaba.com/

Address: Sanhe Industrial Zone, Hengkeng, Liaobu Town, Dongguan, Guangdong

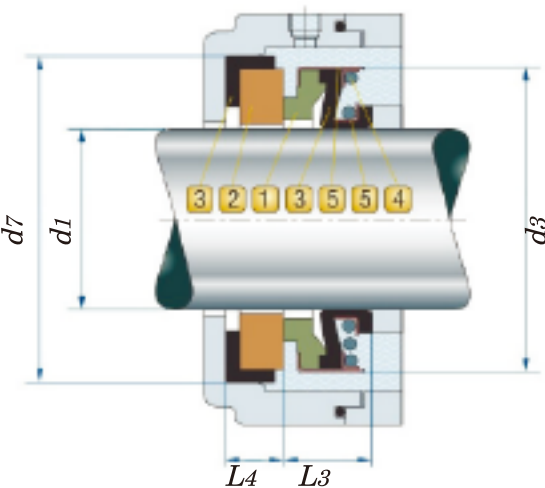

Mechanical seal JX-301

Used in pumps: AL-KO, Calpeda (MXP, MGP, NGL), Kripsol, Pedrolo (JCR, PRO-NGA 1A), Grundfos JP Basic 4 PT and in another pumps.

Analog of mechanical seals: Burgmann BT-AR, AESSEAL B01, Vulcan 18, Anga C10.

Mechanical seal JX-301

Temperature: -20°C~150°C

Pressure: ≤ 0.4 mpa

Speed: ≤ 10 m/sec

Materials

Rotary ring: Carbon / SIC .


Stationary ring: Ceramic / SIC / TC.

Bellows: NBR / EPDM / VITON.

Spring: SSS304 / SS316.

Metal parts: SS304 / SS316.

	d1 (H6)	d3 (Max)	d7 (h8)	L3 (± 0.5)	L4
JX-BT-AR-6	6	18.0	18.0	10.0	4.0
JX-BT-AR-8S	8	18.0	22.0	11.0	4.0
JX-BT-AR-8M	8	20.0	21.0	13.0	6.0
JX-BT-AR-8L	8	24.0	26.0	11.0	8.0
JX-BT-AR-10	10	24.0	26.0	11.0	8.0
JX-BT-AR-11	11	24.0	26.0	13.0	8.0
JX-BT-AR-12	12	24.0	26.0	13.0	8.0
JX-BT-AR-13	13	24.0	26.0	13.0	5,5
JX-BT-AR-13H	13	24.0	26.0	13.0	8.0
JX-BT-AR-14S	14	26.0	28.0/28.5	13.0	8.0
JX-BT-AR-14M	14	28.0	28.0/28.5	13.0	8.0
JX-BT-AR-14L	14	32.0	29.5/38.0	13.0	8.0
JX-BT-AR-15S	15	28.0	30.0	13.0	8.0
JX-BT-AR-15M	15	32.0	29,5	13.0	8.0
JX-BT-AR-15L	15	39.0	38.0	13.0	8.0
JX-BT-AR-16S	16	28.0	30.0	13.0	8.0
JX-BT-AR-16M	16	32.0	29,5	13.0	8.0
JX-BT-AR-16L	16	39.0	42.0	13.0	8.0
JX-BT-AR-17	17	39.0	42.0	13.0	8.0
JX-BT-AR-18	18	39.0	42.0	13.0	8.0
JX-BT-AR-19	19	39.0	42.0	13.0	8.0
JX-BT-AR-20S	20	35.0	38.0	13.0	8.0
JX-BT-AR-20M	20	39.0	42.0	13.0	8.0
JX-BT-AR-20L	20	42.0	45.0	13.0	10.0
JX-BT-AR-22S	22	39.0	42.0	13.0	8.0
JX-BT-AR-22	22	42.0	45.0	13.0	10.0
JX-BT-AR-23	23	47.0	50.0	13,5	10.0
JX-BT-AR-24	24	47.0	50.0	13,5	10.0
JX-BT-AR-25	25	47.0	50.0	13,5	10.0
JX-BT-AR-25S	25	41,5	45/50	13,5	10.0
JX-BT-AR-26	26	47.0	50.0	13,5	10.0
JX-BT-AR-27	27	47.0	50.0	13,5	10.0
JX-BT-AR-28	28	54.0	57.0	15.0	10.0
JX-BT-AR-30	30	54.0	57.0	15.0	10.0
JX-BT-AR-32	32	54.0	57.0	15.0	10.0
JX-BT-AR-35	35	60.0	63.0	16.0	10.0
JX-BT-AR-38	38	65.0	68.0	18.0	12.0
JX-BT-AR-40	40	65.0	68.0	18.0	12.0
JX-BT-AR-45	45	70.0	73.0	20.0	12.0
JX-BT-AR-50	50	85.0	88.0	23.0	15.0
JX-BT-AR-55	55	85.0	88.0	23.0	15.0
JX-BT-AR-60	60	105.0	110.0	30.0	15.0
JX-BT-AR-65	65	105.0	110.0	30.0	15.0
JX-BT-AR-70	70	105.0	110.0	32.0	15.0

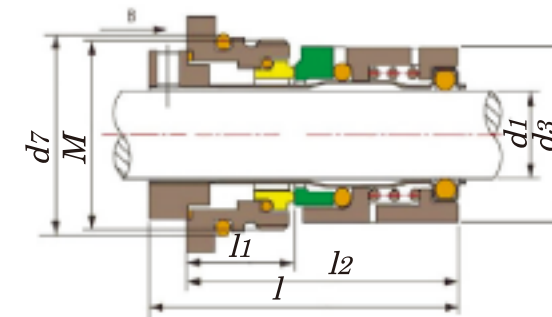

Mechanical seal JX-CR(GF)

Temperature: -20°C~150°C

Pressure: ≤ 2.0 mpa

Speed: ≤ 15 m/ sec

Materials


Rotary ring: Carbon / SIC / TC.

Stationary ring: Carbon / SIC / TC.

Bellows: NBR / EPDM / VITON.

Spring: SSS304 / SS316.

Metal parts: SS304 / SS316.

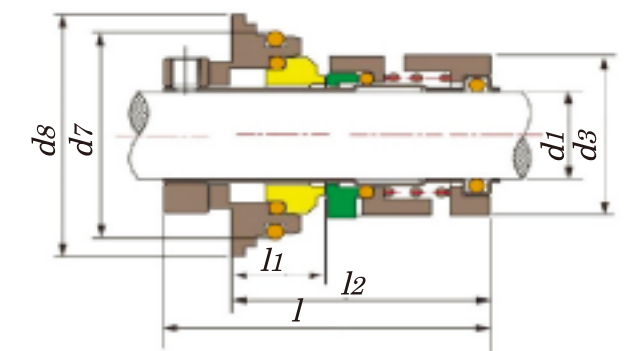

d1	d3 (H6)	d7 (Max)	d8 (h8)	M (± 0.5)	L	L1 (h8)	L2	d8
12	25,00	29,00	\	M28X1.5	55,00	19,00	49,00	35,80
16	30,50	34,00	\	M35X1.5	57,50	20,00	50,50	40,80
22	39,50	50,00	59,00	\	71,00	20,00	57,00	\



JIEXIN MECHANICAL SEAL CO., LTD

Contact: Huo Yuwei

WhatsApp: +0086 13925553104

Email: a13925553104@163.com

https://jiexinseal.en.alibaba.com/

Address: Sanhe Industrial Zone, Hengkeng, Liaobu Town, Dongguan, Guangdong



Mechanical seal JX-CR(4R)

Temperature: -20°C~150°C

Pressure: ≤2.0 mpa

Speed: ≤15 m/ sec

Materials


Rotary ring: Carbon / SIC / TC.

Stationary ring: Carbon / SIC / TC.

Bellows: NBR / EPDM / VITON.

Spring: SSS304 / SS316.

Metal parts: SS304 / SS316.

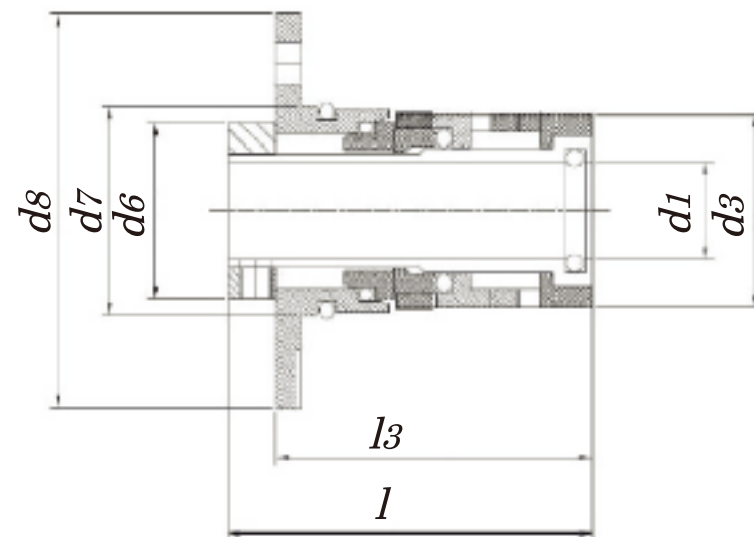

JX-CR(4R)	d1	d3	d6	d7	d8	L3	L
	12	25	25	31	58	31	57
	16	32	29	34,5	65	52	57,5
	22	39,5	39	49,7	90	38	70



JIEXIN MECHANICAL SEAL CO., LTD

Contact: Huo Yuwei

WhatsApp: +0086 13925553104

Email: a13925553104@163.com

https://jiexinseal.en.alibaba.com/

Address: Sanhe Industrial Zone, Hengkeng, Liaobu Town, Dongguan, Guangdong



Mechanical seal JX-GF(04)

Temperature: -40°C~180°C

Pressure: ≤1.7 mpa

Speed: ≤15 m/ sec

Materials


Rotary ring: Carbon / SIC / TC.

Stationary ring: Carbon / SIC / TC.

Bellows: EPDM / VITON.

Spring: SSS304 / SS316.

Metal parts: SS304 / SS316.

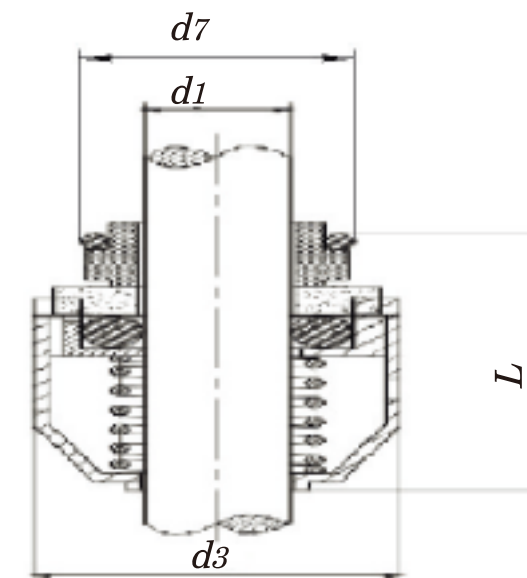

JX-GF(04)	d1 (H6)	d3 (Max)	d7 (h8)	L (±0.5)
JX-JY4-12	12	29	23	40
JX-JY4-16	16	34	27	38,6

Mechanical seal of JX-GF(04) type is de-signed for the Grundfos pump.

JX-GF(04)-12mm: Item Number of Grundfos

985167/ 405145/ 405009 / 96513598.

JX-GF(04)-16 mm. Item Number of Grundfos:

985204/ 339701/ 96521638 .

Grundfos pump repair kits, such as shaft seal kit 985167, 985737, 985164, 415080, 69632394.

1.Kit, shaft seal RUUE/V, 985737, suitable for CH, CHV 2, 4, EAN code: 5700392254122

2.Kit, AUUE/V shaft seal, 985167, suitable for CR(N)2/4, EAN code: 5700392251343

3.Kit, shaft seal CVBE/V, 985164, suitable for CHV/CH2/4, EAN code: 5700392251305

4.Kit, shaft seal AUUV, 415080, suitable for CRK2/4, EAN code: 5700392118219



JIEXIN MECHANICAL SEAL CO., LTD

Contact: Huo Yuwei

WhatsApp: +0086 13925553104

Email: a13925553104@163.com

https://jiexinseal.en.alibaba.com/

Address: Sanhe Industrial Zone, Hengkeng, Liaobu Town, Dongguan, Guangdong



Mechanical seal JX-GF(05)

Temperature: -20°C~150°C

Pressure: ≤1.5 mpa

Speed: ≤15 m/ sec

Materials


Rotary ring: Ceramic / SiC / TC.

Stationary ring: Carbon / SiC / TC.

Bellows: NBR / EPDM / VITON.

Spring: SSS304 / SS316.

Metal parts: SS304 / SS316.

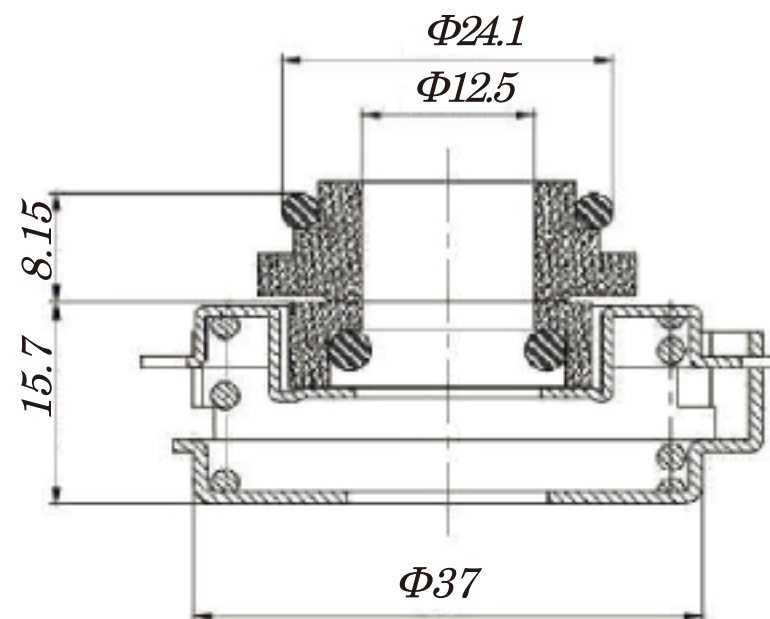

Used in Grundfos pumps: CM, CME, CMV
1/3/5/10/15/25 - AQQE/V - 96932392

Mechanical seals for Grundfos pumps are used in these types of Grundfos pumps: JP, Ch8, Ch12, CRK (I) 2, CRK (I) 4 series. SPK1, SPK2, SPK4, SPK8 series. Cr2, Cr4 series.

Part number of Grundfos: 96932392 / 96932350. CM 1/3/5 - AQQE/V-96932392

The CM pump is a compact horizontal pump multistage centrifugal pump with: 1-phase, 220-240 V, 50 Hz, foot-mounted electric motor. Pump with an axial suction channel and a radial outlet channel, including a special design shaft seal in AQQE de-sign. The shaft, impellers, chambers and plugs of the filling holes are made of stainless steel. The suction and discharge pipes are made of Stainless steel.



JIEXIN MECHANICAL SEAL CO., LTD

Contact: Huo Yuwei

WhatsApp: +0086 13925553104

Email: a13925553104@163.com

https://jiexinseal.en.alibaba.com/

Address: Sanhe Industrial Zone, Hengkeng, Liaobu Town, Dongguan, Guangdong



Mechanical seal JX-CR(3R)

Temperature: -20°C~150°C

Pressure: ≤1.5 mpa

Speed: ≤15 m/ sec

Materials


Rotary ring: Carbon / SiC / TC.

Stationary ring: Carbon / SiC / TC.

Bellows: NBR / EPDM / VITON.

Spring: SSS304 / SS316.

Metal parts: SS304 / SS316.

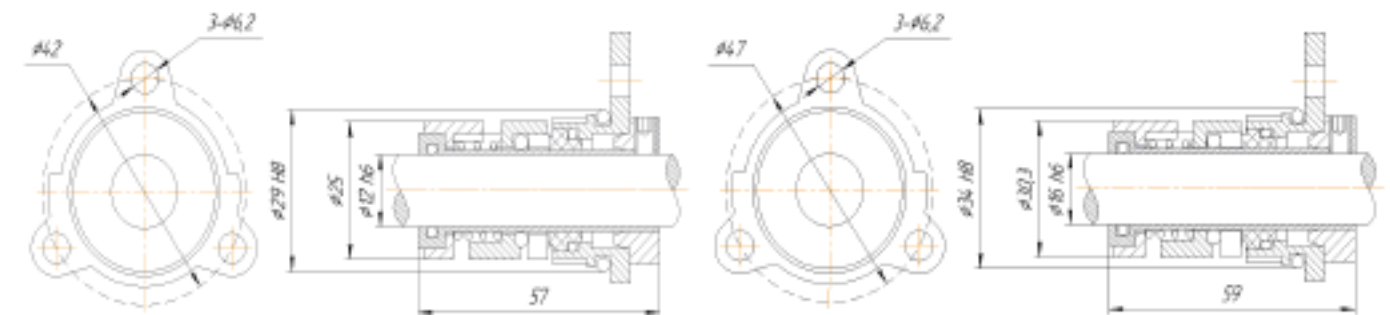

Mechanical seal of JX-CR(3R) type is de-signed for the Grundfos pump.
JX-CR(3R)-12mm: Item Number of Grundfos
985167/ 405145/ 405009 / 96513598.

JX-CR(3R)-16 mm. Item Number of Grundfos:
985204/ 339701/ 96521638 .

Grundfos pump repair kits, such as shaft seal kit 985167, 985737, 985164, 415080, 69632394.

1.Kit, shaft seal RUUE/V, 985737, suitable for CH, CHV 2, 4, EAN code: 5700392254122

2.Kit, AUUE/V shaft seal, 985167, suitable for CR(N)2/4, EAN code: 5700392251343

3.Kit, shaft seal CVBE/V, 985164, suitable for CHV/CH2/4, EAN code: 5700392251305

4.Kit, shaft seal AUUV, 415080, suitable for CRK2/4, EAN code: 5700392118219



JIEXIN MECHANICAL SEAL CO., LTD

Contact: Huo Yuwei

WhatsApp: +0086 13925553104

Email: a13925553104@163.com

https://jiexinseal.en.alibaba.com/

Address: Sanhe Industrial Zone, Hengkeng, Liaobu Town, Dongguan, Guangdong



Mechanical seal JX-GF(03)

Temperature: -20°C~150°C

Pressure: ≤2.0mpa

Speed: ≤15 m/ sec

Materials


Rotary ring: Carbon / SIC

Stationary ring: Carbon / SIC / TC.

Bellows: NBR / EPDM / VITON.

Spring: SSS304 / SS316.

Metal parts: SS304 / SS316.

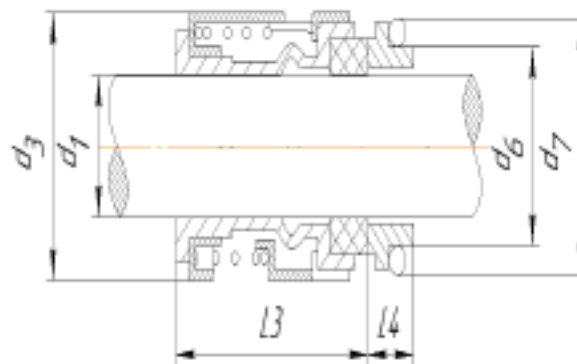

JX-GF(03)	d1 (H6)	d3 (Max)	d6 (h8)	d7 (±0.5)	L3	L4 (h8)
JX-GF(03)	12	22	19	23	24	8.5
JX-GF(03) long	12	22	19	23	39	8.5
JX-GF(03)	16	26	23	27	25	9
JX-GF(03) long	16	26	23	27	30	9

It is used in these types of Grundfos pumps: CH, CHI, CHE, CRK, SPK, TP, AP series. CR, CRN, NK, TP series. LM (D) / LP (D), NM / NP, DNM / DNP series.

The JX-JY3 mechanical seal is used in Grundfos pumps: CH/CHI / CHE / CRK / SPK / TP
APCR / CRN / NK pumps series
TP / LM (D) / LP (D) / NM / NP / DNM / DNP
pumps series.

Standard shaft size: 12 mm, 16 mm, 22 mm

JX-GF(03)-12mm

Item number of Grundfos: 96409293/96409263 00405096 / 00405097.

JX-GF(03)-16mm: Item number of Grundfos: 96409265 / 00485351 / 00425062 / 00425063 /
00425063. The

Grundfos pumps of TP, TD series are Designed

specially for pumping working fluids in circulation systems with a constant flow rate. For variable
flow systems, are usually used models with TPE and TPED frequency converters. The standard
sizes of

these pumps are available in single TP and double TPD versions.



JIEXIN MECHANICAL SEAL CO., LTD

Contact: Huo Yuwei

WhatsApp: +0086 13925553104

Email: a13925553104@163.com

https://jiexinseal.en.alibaba.com/

Address: Sanhe Industrial Zone, Hengkeng, Liaobu Town, Dongguan, Guangdong



Mechanical seal JX-GF01(SZB)

Temperature: -20°C~180°C

Pressure: ≤1.7 mpa

Speed: ≤15m/sec

Materials


Rotary ring: SIC / TC.

Stationary ring: Carbon / SIC / TC.

Bellows: NBR / EPDM / VITON.

Spring: SS304.

Metal parts: SS304 / SS316.

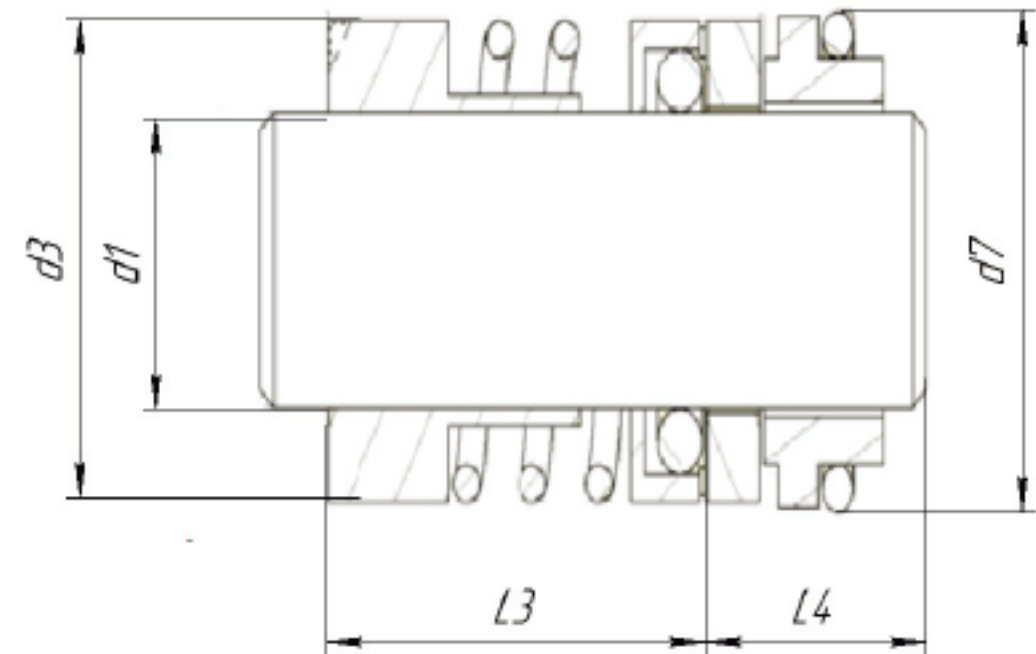

	d1 (H6)	d3 (Max)	d7 (h8)	L3 (±0.5)	L4
JX-GF01(SZB)	12	22	23	32	7
	16	26	27	33.5	7



JIEXIN MECHANICAL SEAL CO., LTD

Contact: Huo Yuwei

WhatsApp: +0086 13925553104

Email: a13925553104@163.com

https://jiexinseal.en.alibaba.com/

Address: Sanhe Industrial Zone, Hengkeng, Liaobu Town, Dongguan, Guangdong



JIEXIN MECHANICAL SEAL CO., LTD


Contact: Huo Yuwei

WhatsApp: +0086 13925553104

Email: a13925553104@163.com

https://jiexinseal.en.alibaba.com/

Address: Sanhe Industrial Zone, Hengkeng, Liaobu Town, Dongguan, Guangdong

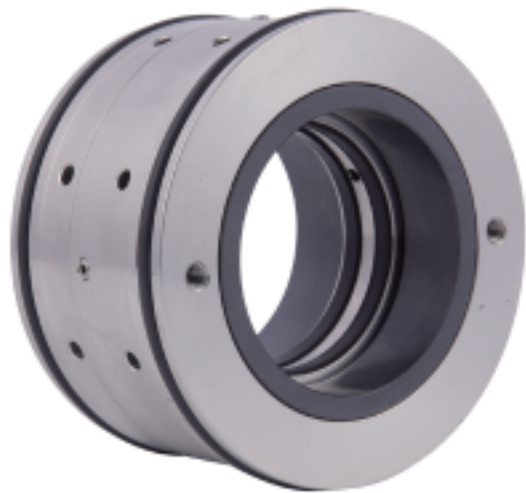

Mechanical seal JX-WE

Temperature: -20°C~200°C

Pressure: ≤1.5 mpa

Speed: ≤20 m/sec

Materials


Rotary ring: SIC / TC.

Stationary ring: SIC .

Bellows: NBR / VITON / EPDM.

Spring: SSS304 / SS316.

Metal parts: SS304 / SS316.

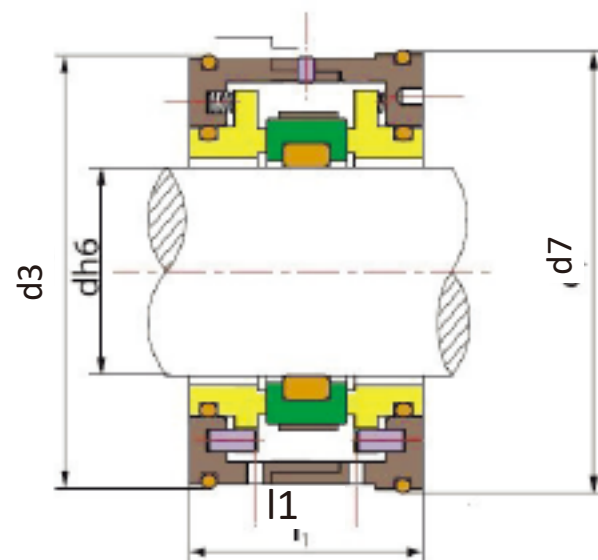

JX-WE

dh6	d3	d7	L1
(H6)	(Max)	(h8)	(±0.5)
30	62	65	46
35	67	70	46
40	72	75	46
50	90	92	52
60	92	99	46
75	128	130	75

Mechanical seal JX-LWR-22

Temperature: -20°C~140°C

Pressure: ≤1.4 mpa

Speed: ≤15 m/sec

Materials


Rotary ring: Ceramic / SIC / TC.

Stationary ring: Carbon / SIC / TC.

Bellows: NBR / EPDM / VITON.

Spring: SSS304 / SS316.

Metal parts: SS304 / SS316.

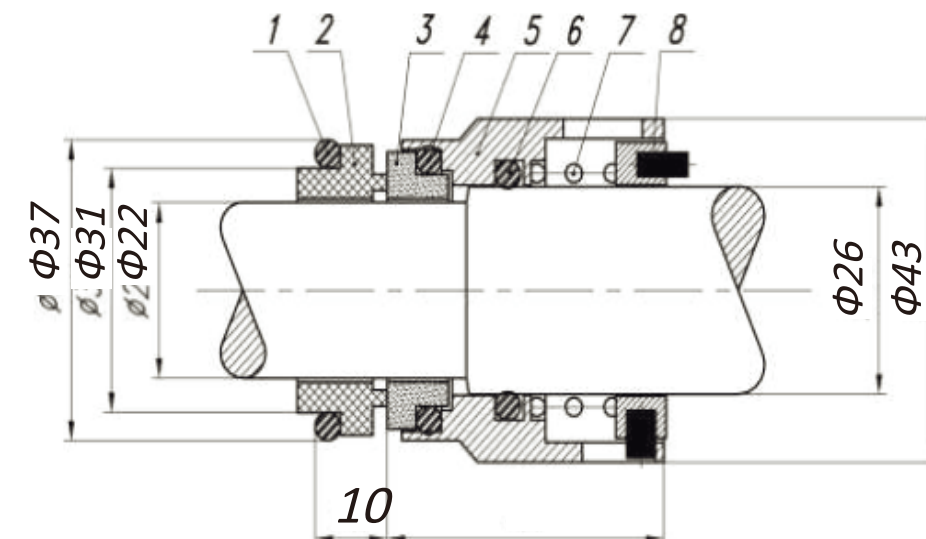

Single mechanical face seal JX-LWR

Application in pumps Lowara SVI 33, 46, 66, 92

Analogue: AESSEAL T07 / T07D / T07X, Burgmann M2N, Roten UNITEN 22, Hecker HN 400A.



JIEXIN MECHANICAL SEAL CO., LTD

Contact: Huo Yuwei

WhatsApp: +0086 13925553104

Email: a13925553104@163.com

https://jiexinseal.en.alibaba.com/

Address: Sanhe Industrial Zone, Hengkeng, Liaobu Town, Dongguan, Guangdong



JIEXIN MECHANICAL SEAL CO., LTD

Contact: Huo Yuwei

WhatsApp: +0086 13925553104

Email: a13925553104@163.com

https://jiexinseal.en.alibaba.com/

Address: Sanhe Industrial Zone, Hengkeng, Liaobu Town, Dongguan, Guangdong



Mechanical seal JX-FS

Temperature: -20°C~180°C

Pressure: ≤1.4 mpa

Speed: ≤15 m/sec

Materials






Rotary ring: TC.

Stationary ring: TC.

Bellows: NBR / EPDM / VITON.

Spring: SSS304 / SS316.

Metal parts: SS304 / SS316.

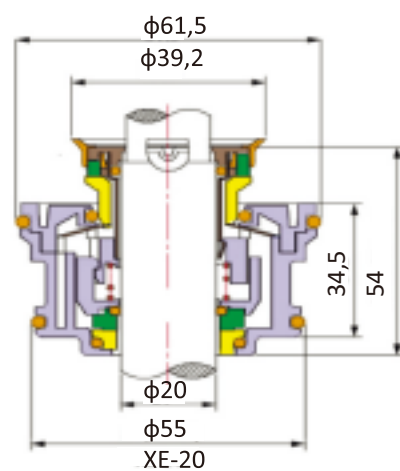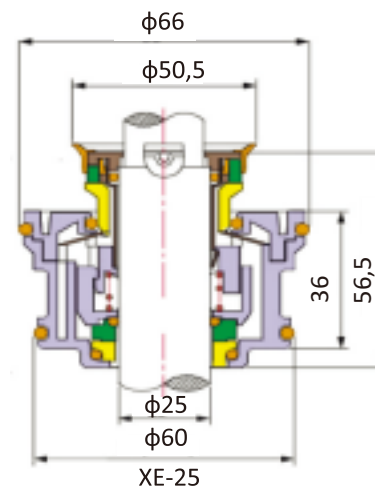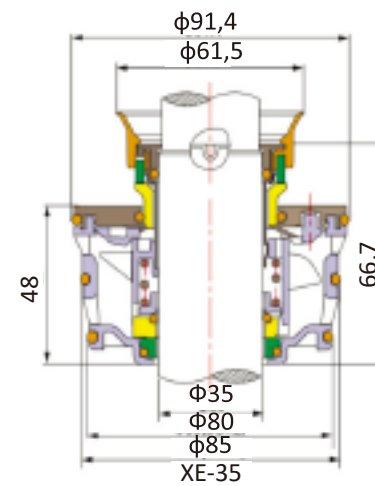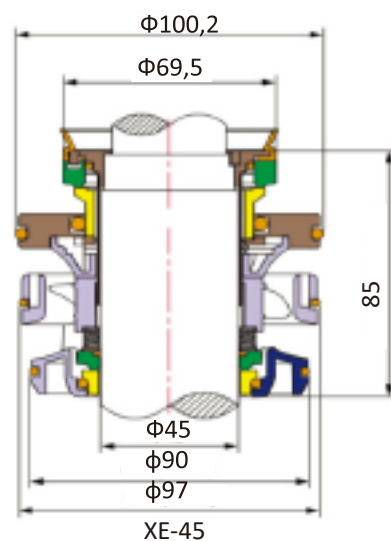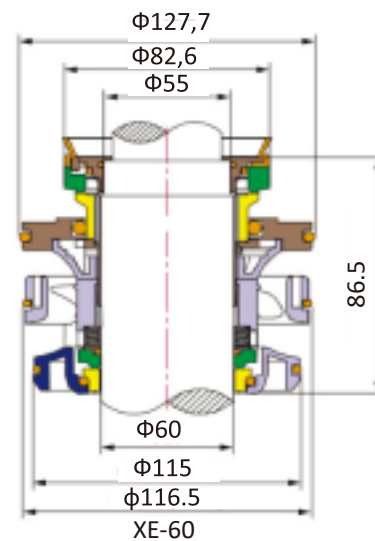

Mechanical seal JX-FS

Used in Flygt pumps and Grindex

Analogue: ITT



Mechanical seal JX-APV

Temperature: -20°C~150°C

Pressure: ≤0.8 mpa

Speed: ≤15m/sec


Materials

Rotary ring: SiC.

Stationary ring: Carbon/SiC.

Bellows: EPDM/VIT

JX-APV	d1 (H6)	d7 (h8)	L1	L2
	25	46	11.5	17.5
	35	56	11.5	17.5
It is applied for APV W+ pump series				

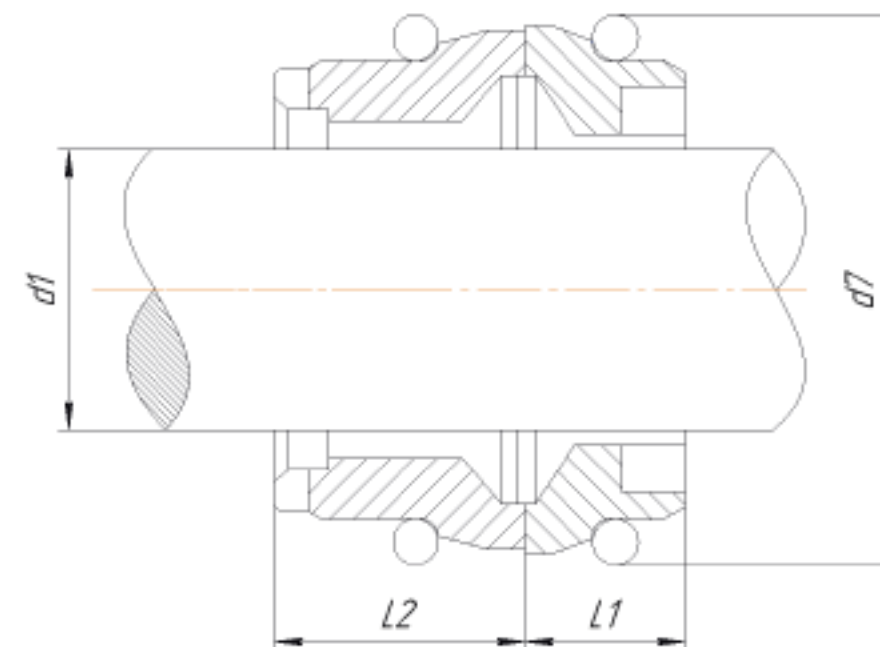



JIEXIN MECHANICAL SEAL CO., LTD

Contact: Huo Yuwei

WhatsApp: +0086 13925553104

Email: a13925553104@163.com

https://jiexinseal.en.alibaba.com/

Address: Sanhe Industrial Zone, Hengkeng, Liaobu Town, Dongguan, Guangdong



Mechanical seal JX-MGS20

Temperature: -20°C~140°C

Pressure: ≤1.6 mpa

Speed: ≤10m/sec

Materials


Rotary ring: Carbon / SIC.

Stationary ring: Ceramic/SIC/TC

Bellows: NBR / EPDM / VITON.

Spring: SS304 / SS316.

Metal parts: SS304 / SS316.

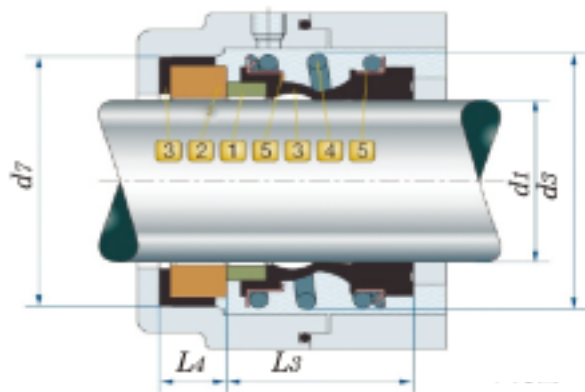

Type of counter ring



Single mechanical seal JX-MGS20

Used in pumps: Alfa Laval, Ebara, Lowara, KSB (Etanorm, Etachrom), WILO (MVI, MHI, IPL/DPL), Grundfos (CDM), Saer (IP), and many others.

Analogue: Burgmann MGS20



JIEXIN MECHANICAL SEAL CO., LTD

Contact: Huo Yuwei

WhatsApp: +0086 13925553104

Email: a13925553104@163.com

https://jiexinseal.en.alibaba.com/

Address: Sanhe Industrial Zone, Hengkeng, Liaobu Town, Dongguan, Guangdong



Mechanical seal JX-H12N

Temperature: -40°C~220°C

Pressure: ≤1.4 mpa

Speed: ≤15m/sec

Materials


Rotary ring: Carbon / SIC.

Stationary ring: Ceramic/SUS/SIC/TC


Bellows: NBR / EPDM / VITON.

Spring: SS304 / SS316.

Metal parts: SS304 / SS316.

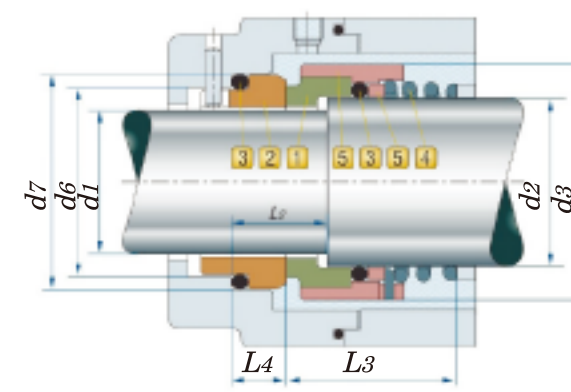

Type of counter ring

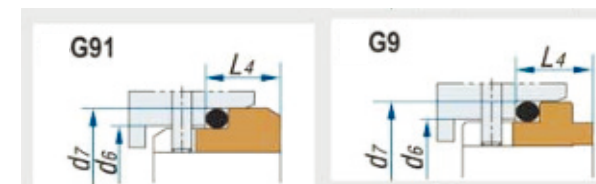

Single mechanical end unit with conical spring JX-H12N

Apply to Hecker HN 430N pumps, CR, NBG, Grundfos, TP, NKG, CLM, CRN series pumps and so on.

Analogue: Burgmann H12N/H17GN, Flowserve 43D seal, Latty T901D seal, Roplan R62D seal, Roten, AESSEAL T01DB.

d1 H6	d2	d3 (MAX)	d6	d7 (H8)	L2	L3 (±0.5)	L4
12	16,00	26,00	19,00	23,00	18,00	26,50	10,00
14	18,00	31,00	21,00	25,00	18,00	29,50	10,00
16	20,00	34,00	23,00	27,00	18,00	31,00	10,00
18	22,00	36,00	27,00	33,00	20,00	32,50	11,50
20	24,00	38,00	29,00	35,00	20,00	32,50	11,50
22	26,00	40,00	31,00	37,00	20,00	32,50	11,50
24	28,00	42,00	33,00	39,00	20,00	32,50	11,50
25	30,00	44,00	34,00	40,00	20,00	33,50	11,50
28	33,00	47,00	37,00	43,00	20,00	35,50	11,50
30	35,00	49,00	39,00	45,00	20,00	35,50	11,50
32	38,00	54,00	42,00	48,00	20,00	39,50	11,50
33	38,00	54,00	42,00	48,00	20,00	39,50	11,50
35	40,00	56,00	44,00	50,00	20,00	43,50	11,50
38	43,00	59,00	49,00	56,00	23,00	46,00	14,00
40	45,00	61,00	51,00	58,00	23,00	48,00	14,00
43	48,00	64,00	54,00	61,00	23,00	51,00	14,00
45	50,00	66,00	56,00	63,00	23,00	55,00	14,00
48	53,00	69,00	59,00	66,00	23,00	55,00	14,00
50	55,00	71,00	62,00	70,00	25,00	58,00	15,00
53	58,00	78,00	65,00	73,00	25,00	60,00	15,00
55	60,00	79,00	67,00	75,00	25,00	60,00	15,00
58	63,00	83,00	70,00	78,00	25,00	60,00	15,00
60	65,00	85,00	72,00	80,00	25,00	60,00	15,00
63	68,00	88,00	75,00	83,00	25,00	60,00	15,00
65	70,00	90,00	77,00	85,00	25,00	61,00	15,00
70	75,00	98,00	83,00	92,00	28,00	63,00	18,00
75	80,00	103,00	88,00	97,00	28,00	68,00	18,00
80	85,00	109,00	95,00	105,00	28,00	68,00	18,20



JIEXIN MECHANICAL SEAL CO., LTD

Contact: Huo Yuwei

WhatsApp: +0086 13925553104

Email: a13925553104@163.com

https://jiexinseal.en.alibaba.com/

Address: Sanhe Industrial Zone, Hengkeng, Liaobu Town, Dongguan, Guangdong



JIEXIN MECHANICAL SEAL CO., LTD

Contact: Huo Yuwei

WhatsApp: +0086 13925553104

Email: a13925553104@163.com

https://jiexinseal.en.alibaba.com/

Address: Sanhe Industrial Zone, Hengkeng, Liaobu Town, Dongguan, Guangdong

Mechanical seal JX-M2N

Temperature: -20°C~180°C

Pressure: ≤1mpa

Speed: ≤15m/sec

Materials


Rotary ring: Ceramic / SIC / TC.

Stationary ring: Carbon / SIC / TC/SUS.


Bellows: NBR / EPDM / VITON.

Spring: SS304 / SS316.

Metal parts: SS304 / SS316.

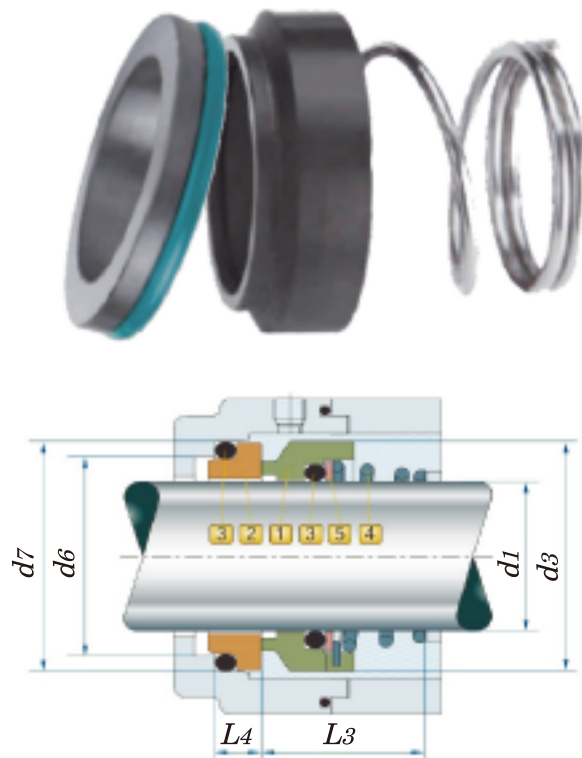


Type of counter ring

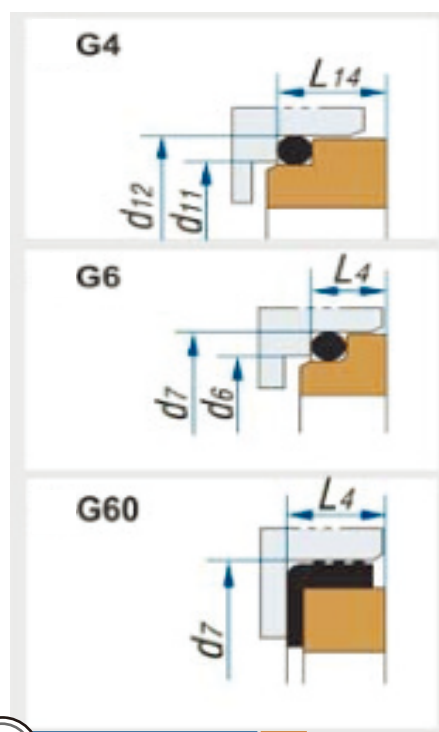


37

JX-M2N

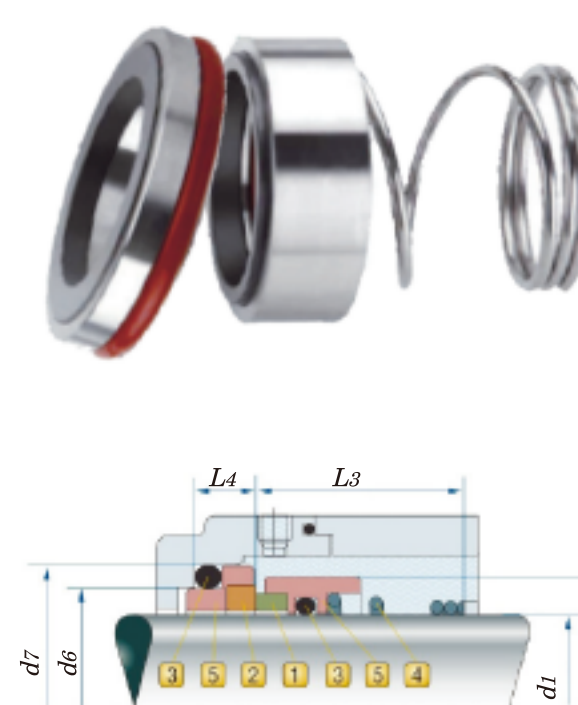

Type of counter ring

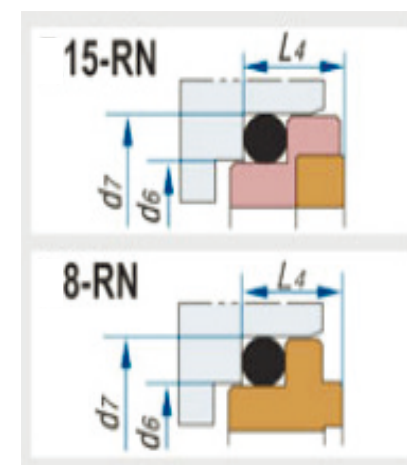

Single mechanical seal JX-551A

Used in pumps: Lowara, Ebara (3M), EMU, Flugt, Fristam, GEA Tuchenhausen, Goetze, etc.

Analogue: Burgmann BT-RN seal, Flowserve 42 seal, Latty T900 seal, Roten 2 seal, Sterling SR2 seal.

Mechanical seal JX-551A

Temperature: -20°C~200°C

Pressure: ≤1mpa

Speed: ≤15m/sec

Materials

Rotary ring: SUS/ SIC / TC.

Stationary ring: Carbon / SIC / TC.

Bellows: NBR / EPDM / VITON.

Spring: SS304 / SS316.

Metal parts: SS304 / SS316.

d1	d3	d6	d7	L3	L4
(h6)	(Max)		(h8)	(±0.5)	
8	16	13	17,1	15	5,5
10	20	14	18,1	15	5,5
12	21	16,5	20,6	18	5,5
14	23	19	23,1	22	6,0
15	24	21	26,9	22	7,0
16	26	21	26,9	23	7,0
17	26	21	26,9	23	7,0
18	29	25	30,9	24	8,0
19	29	25	30,9	25	8,0
20	31	25	30,9	25	8,0
22	33	30	35,4	25	8,0
24	35	30	35,4	27	8,0
25	36	33	38,2	27	8,5
26	36	33	38,2	27	8,5
28	40	38	43,3	29	9,0
30	43	38	43,3	30	9,0
32	46	38	43,3	30	9,0
33	47	45	53,5	39	11,5
35	49	45	53,5	39	11,5
38	53	52	60,5	39	11,5
40	56	52	60,5	39	11,5
42	59	52	60,5	39	11,5
43	59	52	60,5	39	11,5
45	61	57	65,5	41	11,5
48	64	57	65,5	41	11,5
50	66	64	72,5	45	11,5
55	71	64	72,5	47	11,5
60	78	72	79,3	49	11,5
65	84	77	84,5	51	11,5
70	90	82	89,5	51	11,5
75	98	87	94,5	57	11,5
80	100	92	99,5	59	11,5
85	109	98	105,5	59	13,5
90	114	105	111,5	62	13,5
95	119	110	116,5	62	13,5
100	124	114	119,5	75	13,5

JX-551A

38



JIEXIN MECHANICAL SEAL CO., LTD

Contact: Huo Yuwei

WhatsApp: +0086 13925553104

Email: a13925553104@163.com

https://jiexinseal.en.alibaba.com/

Address: Sanhe Industrial Zone, Hengkeng, Liaobu Town, Dongguan, Guangdong



JIEXIN MECHANICAL SEAL CO., LTD

Contact: Huo Yuwei

WhatsApp: +0086 13925553104

Email: a13925553104@163.com

https://jiexinseal.en.alibaba.com/

Address: Sanhe Industrial Zone, Hengkeng, Liaobu Town, Dongguan, Guangdong

Mechanical seal JX-551B

Temperature: -20°C~180°C

Pressure: ≤1.0 mpa

Speed: ≤15m/sec

Materials


Rotary ring: SUS/ SIC / TC.

Stationary ring: Carbon / SIC / TC.


Bellows: NBR / EPDM / VITON.

Spring: SS304 / SS316.

Metal parts: SS304 / SS316.

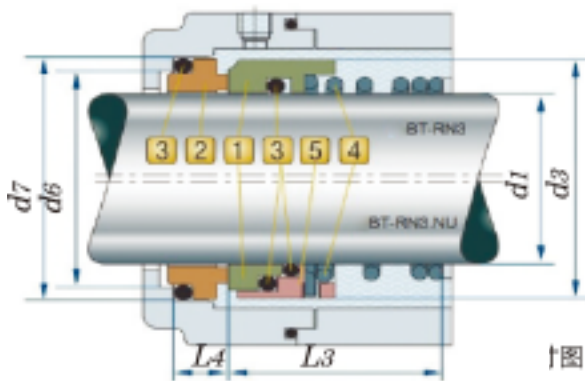

Type of counter ring

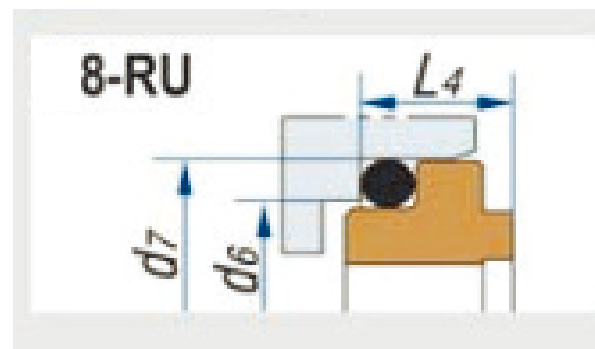

Mechanical seal JX-551B

Used in pumps: Lowara, Ebara (3M), EMU, Flugt, Fristam, GEA Tuchenhausen, Goetze, ETC

Analogue: Burgmann BT-RN3 seal, Flowserve 42 seal, Latty T900 seal, Sterling SR2 seal.

Mechanical seal JX-M3N

Temperature: -20°C~180°C

Pressure: ≤1.2 mpa

Speed: ≤15m/sec

Materials




Rotary ring: Carbon / SIC / TC.

Stationary ring: Carbon/Ceramic/SIC/SUS.

Bellows: NBR / EPDM / VITON.

Spring: SS304 / SS316.

Metal parts: SS304 / SS316.

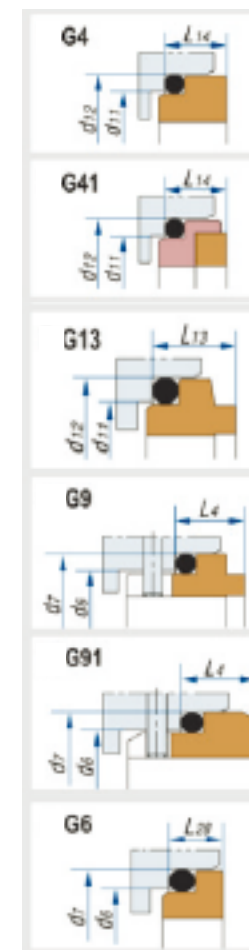

d1 (h6)	d2	d3 (min)	d7 H8	d12 (±0.5)	L2 (±0.5)	L3 (±0.5)	L4	L13	L14	L28
12	21	21	23	21,6	15,5	16,0	10,0	7,6	5,6	6,6
14	23	23	25	24,6	15,5	16,5	10,0	7,6	5,6	6,6
15	24	-	-	24,6	15,5	-	-	8,6	6,6	-
16	26	26	27	28,0	17,5	18,0	10,0	9,0	7,5	6,6
18	29	29	33	30,0	18,5	19,5	11,5	10,0	8,0	7,5
19	-	31	-	31,0	20,0	-	-	8,6	7,5	-
20	31	31	35	35,0	20,0	22,0	11,5	9,5	7,5	7,5
22	33	33	37	35,0	21,5	21,5	11,5	9,5	7,5	7,5
24	35	35	39	38,0	23,0	23,5	11,5	9,5	7,5	7,5
25	36	36	40	38,0	24,5	26,5	11,5	9,5	7,5	7,5
26	-	37	-	40,0	24,5	-	-	10,0	8,0	-
28	40	40	43	42,0	24,5	26,5	11,5	11,0	9,0	7,5
30	43	43	45	45,0	24,5	26,5	11,5	11,0	10,5	7,5
32	46	46	48	48,0	28,0	28,5	11,5	11,0	10,5	7,5
33	-	47	48	-	-	28,5	11,5	-	-	7,5
35	49	49	50	52,0	28,0	28,5	11,5	11,5	11,0	7,5
38	53	53	56	55,0	31,0	33,5	14	11,5	11,0	9,0
40	56	56	58	58,0	34,0	36,0	14	11,5	10,8	9,0
42	-	59	-	62,0	35,0	-	-	14,3	12,0	-
43	59	59	61	62,0	35,0	38,5	14	14,3	12,0	9,0
45	61	61	63	64,0	36,5	39,5	14	14,3	11,6	9,0
48	64	64	66	68,4	42,0	46,0	14	14,3	11,6	9,0
50	66	66	70	69,3	43,0	45,0	15	14,3	11,6	9,5
53	-	69	73	-	-	47,0	15	15,3	-	11,0
55	71	71	75	75,4	47,0	49,0	15	15,3	13,3	11,0
58	76	76	78	78,4	50,0	55,0	15	15,3	13,3	11,0
60	78	78	80	80,4	51,0	55,0	15	15,3	13,3	11,0
63	-	83	83	-	-	55,0	15	-	13,3	11,0
65	84	84	85	85,4	52,0	55,0	15	15,3	13,0	11,0
68	88	88	90	91,5	53,0	55,0	18	16,0	13,7	11,3
70	90	90	92	92,0	54,0	57,0	18	15,3	13,0	11,3
75	98	98	97	99,0	55,0	62,0	18	15,3	14,0	11,3
80	100	100	105	104,0	58,0	61,8	18,2	16,3	15,0	11,3



JIEXIN MECHANICAL SEAL CO., LTD

Contact: Huo Yuwei

WhatsApp: +0086 13925553104

Email: a13925553104@163.com

https://jiexinseal.en.alibaba.com/

Address: Sanhe Industrial Zone, Hengkeng, Liaobu Town, Dongguan, Guangdong



JIEXIN MECHANICAL SEAL CO., LTD

Contact: Huo Yuwei

WhatsApp: +0086 13925553104

Email: a13925553104@163.com

https://jiexinseal.en.alibaba.com/

Address: Sanhe Industrial Zone, Hengkeng, Liaobu Town, Dongguan, Guangdong



Mechanical seal JX-21

Temperature: -20°C~145°C

Pressure: ≤1.5 mpa

Speed: ≤13m/sec

Materials


Rotary ring: Carbon / SIC / TC.

Stationary ring: Ceramic / SIC / TC.


Bellows: NBR / EPDM / VITON.

Spring: SS304 / SS316.

Metal parts: SS304 / SS316.

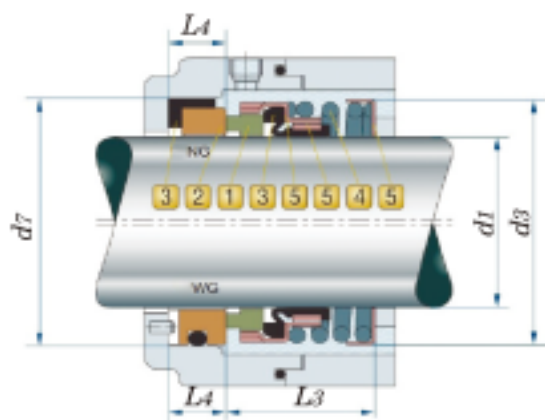

Type of counter ring

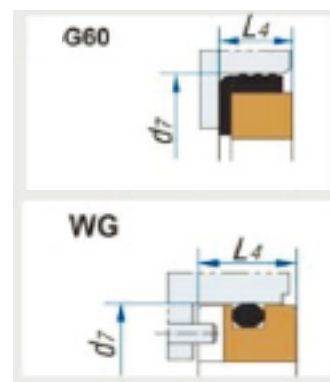

Mechanical seal JX-21

It is applied to pumps of the Haigh, Hidrostat, Hilge, Inbeat, INOX series and another pumps.

Analogue: Burgmann MG920/ D1-G50 seal. Crane 21 (N SEAT) seal. Flowserve 200 seal, Latty T200 seal, Roten RB02 seal, Roten 21 seal, Sealol 43 CE short seal, Sterling 212 seal, V ulcan 20 seal.

JX-21	d1	d3	d7	L3	L4
10	20,50	24,60	25,40	8,74	
12	22,50	27,79	25,40	8,74	
14	26,50	30,95	25,40	10,32	
16	26,50	30,95	25,40	10,32	
18	34,00	34,15	25,40	10,32	
20	36,00	35,70	25,40	10,32	
22	36,00	37,30	25,40	10,32	
24	40,00	40,50	25,40	10,32	
25	40,00	40,50	25,40	10,32	
28	42,00	47,63	33,34	11,99	
30	45,00	50,80	33,34	11,99	
32	47,00	50,80	33,34	11,99	
33	50,00	53,98	33,34	11,99	
35	50,00	53,98	33,34	11,99	
38	55,00	57,15	33,34	11,99	
40	57,00	60,35	33,34	11,99	
42	59,00	63,50	40,48	11,99	
43	59,00	63,50	40,48	11,99	
45	65,50	63,50	40,48	11,99	
48	67,50	66,70	40,48	11,99	
50	67,50	69,85	40,48	11,99	
53	72,00	73,05	41,00	13,50	
55	78,50	76,20	41,00	13,50	
58	80,00	79,40	41,00	13,50	
60	80,00	79,40	41,00	13,50	
63	83,00	82,55	41,00	13,50	
65	88,00	92,10	49,00	15,90	
70	90,00	95,25	49,00	15,90	
73	94,00	98,45	49,00	15,90	
75	99,00	101,65	49,00	15,90	

JX-21(Inch)	d1	d3	d7	L3	L4
0.375	9,53	20,50	24,60	25,40	8,74
0.500	12,70	22,50	27,79	25,40	8,74
0.625	15,87	26,50	30,95	25,40	10,32
0.750	19,05	34,00	34,15	25,40	10,32
0.875	22,23	36,00	37,30	25,40	10,32
1.000	25,40	40,00	40,50	25,40	10,32
1.125	28,58	42,00	47,63	33,34	11,99
1.250	31,75	47,00	50,80	33,34	11,99
1.375	34,93	50,00	53,98	33,34	11,99
1.500	38,10	55,00	57,15	33,34	11,99
1.625	41,28	57,00	60,35	33,34	11,99
1.750	44,45	61,50	63,50	40,48	11,99
1.875	47,63	65,50	66,70	40,48	11,99
2.000	50,80	67,50	69,85	40,48	11,99
2.125	53,98	72,00	73,05	41,00	13,50
2.250	57,15	78,50	76,20	41,00	13,50
2.375	60,33	80,00	79,40	41,00	13,50
2.500	63,50	83,00	82,55	41,00	13,50
2.625	66,68	88,00	92,10	49,00	15,90
2.750	69,85	90,00	95,25	49,00	15,90
2.875	73,03	94,00	98,45	49,00	15,90
3.000	76,20	99,00	101,65	49,00	15,90



Mechanical seal JX-120/120P

Temperature: -40°C~180°C

Pressure: ≤1.4 mpa

Speed: ≤15m/sec

Materials


Rotary ring: SIC / TC.

Stationary ring: Carbon / SIC / TC.


Bellows: NBR / EPDM / VITON.

Spring: SS304 / SS316.

Metal parts: SS304 / SS316.

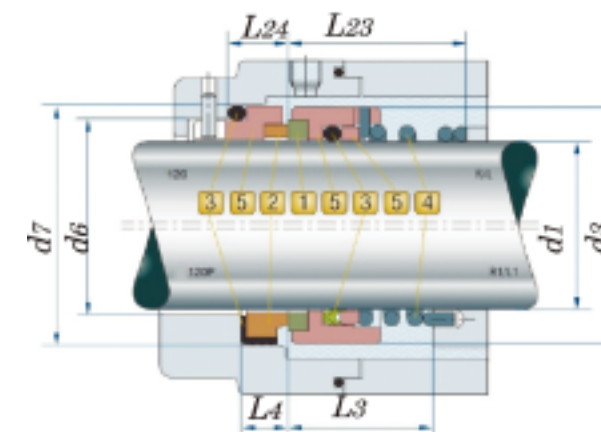

Type of counter ring

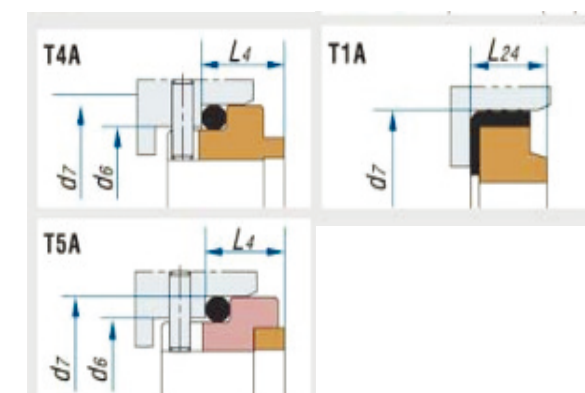

d1 (H6)	d3 (Max)	d6 (h8)	d7	L3 (±0.5)	L4	L23 (±0.5)	L24
18	32	27	33	26.0	10.0	18.5	6.5
20	34	29	35	26.5	10.0	18.5	6.5
22	36	31	37	27.5	10.5	19.0	6.5
25	39	34	40	29.5	10.5	29.0	8.0
28	42	37	43	28.5	11.5	28.5	8.5
30	44	39	45	31.5	11.5	28.5	8.5
35	49	44	50	34.5	11.5	28.5	8.5
38	54	49	56	37.0	13.0	30.5	9.5
40	56	51	58	37.0	13.0	30.5	9.5
45	61	56	63	41.0	13.0	30.5	9.5
50	66	62	70	41.0	14.0	34.5	10.5
55	71	67	75	43.0	14.0	34.5	10.5
60	80	72	80	44.0	14.0		
65	85	77	85	46.0	14.0		
70	90	83	92	46.0	17.0		
75	99	88	97	48.0	17.0		
80	104	95	105	48.0	17.0		

Mechanical seal JX-120/120P

Used in pumps: Lowara, Ebara (3M), EMU, Flugt, Fristam, GEA Tuchenhausen, Goetze, ETC

Analogue: BurgmannBT-RN3seal, Flowserve 42 seal, Latty T900 seal, Sterling SR2 seal.



JIEXIN MECHANICAL SEAL CO., LTD

Contact: Huo Yuwei

WhatsApp:+0086 13925553104

Email:a13925553104@163.com

https://jiexinseal.en.alibaba.com/

Address: Sanhe Industrial Zone, Hengkeng, Liaobu Town, Dongguan, Guangdong



Mechanical seal JX-103

Temperature: -20°C~80°C

Pressure: ≤0.8 mpa

Speed: ≤15m/sec

Materials


Rotary ring: SIC / TC.

Stationary ring: Carbon / SIC / TC.


Bellows: NBR / EPDM / VITON.

Spring: SS304 / SS316.

Metal parts: SS304 / SS316.

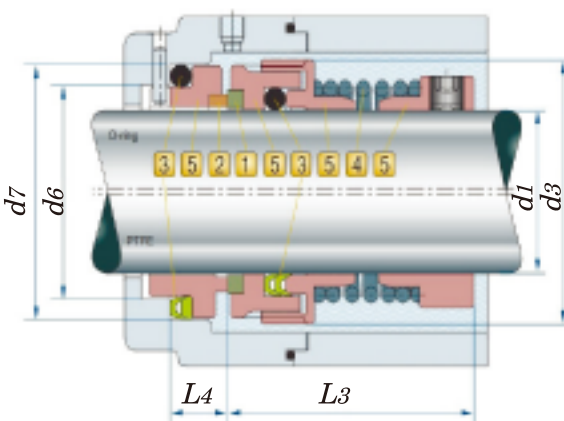

Type of counter ring

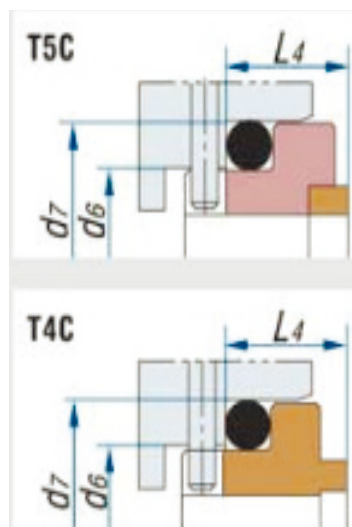

JX-103

d1 (H6)	d3 (Max)	d6 (h8)	d7	L3 (±0.5)	L4
16	33	25,5	33	40	12
18	35	28,5	36	44	12
20	37	30,5	40	44	14
22	39	32,5	42	48	14
25	42	35,5	45	48	14
28	45	38,5	48	50	14
30	52	40,5	50	56	14
35	57	45,5	55	60	14
40	62	50,5	60	64	14
45	67	55,5	65	71	14
50	72	60,5	70	75	14
55	77	65,5	75	77	14
60	82	70,5	80	77	14
65	92	80,5	90	89	17
70	97	85,5	97	91	19
75	102	90,5	102	91	19
80	107	95,5	107	98	19
85	112	100,5	112	100	19
90	117	105,5	117	101	19
95	122	110,5	122	101	19
100	127	115,5	127	101	19
110	141	130,5	142	126	21
120	151	140,5	152	126	21

Single mechanical end seal JX-JB103 with a central spring regardless of the direction of entry.

Application in pumps Wilo, ABS, Alfa laval, Allweiler, APV, Calpeda, DAB, Ebara, EMU, Flugt, Fristam.

Analog of mechanical seals: John Crane, Burgmann, AESSEAL, Latty, Roplan, Roten, Sealol, Sterling.



JIEXIN MECHANICAL SEAL CO., LTD

Contact: Huo Yuwei

WhatsApp:+0086 13925553104

Email:a13925553104@163.com

https://jiexinseal.en.alibaba.com/

Address: Sanhe Industrial Zone, Hengkeng, Liaobu Town, Dongguan, Guangdong



Mechanical seal JX-1527

Temperature: -20°C~150°C

Pressure: ≤1.0 mpa

Speed: ≤10m/sec

Materials


Rotary ring: SIC / TC.

Stationary ring: Carbon / SIC / TC.


Bellows: NBR / EPDM / VITON.

Spring: SS304.

Metal parts: SS304 / SS316.

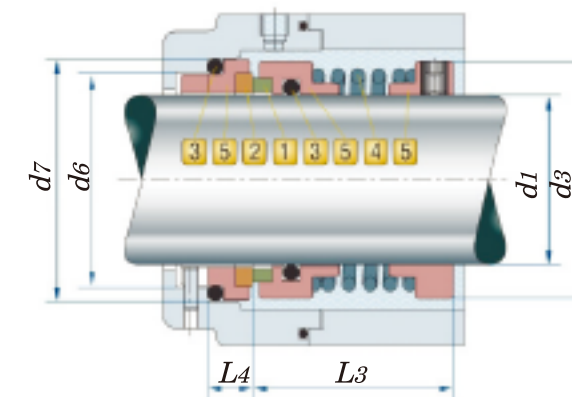

Type of counter ring

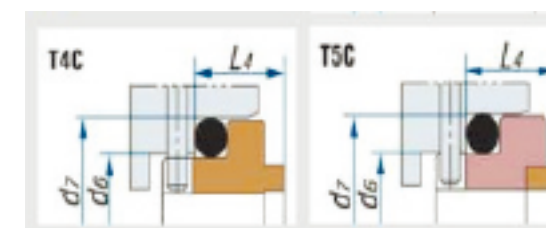

Single mechanical seal JX-1527

Is applicable to the series pumps:MDM, DAB DIVERTRON, DIVER, MICRA HS, IDEA,D-SUB and another pumps.

Analogue: Vidmap to MG912/ D1-G60 seal,Crane 521 seal Flowserve 240 seal,Latty

JX-1527

d1 (H6)	d3 (Max)	d6	d7 (h8)	L3 (±0.5)	L4
18	32	27	33	35.0	10.0
20	34	29	35	35.0	10.0
22	36	31	37	35.0	10.0
24	38	33	39	40.0	10.0
25	39	34	40	40.0	10.0
28	42	37	43	40.0	10.0
30	44	39	45	40.0	10.0
32	46	42	48	45.0	10.0
33	47	42	48	45.0	10.0
35	49	44	50	45.0	10.0
38	54	49	56	44.0	11.0
40	56	51	58	44.0	11.0
43	59	54	61	49.0	11.0
45	61	56	63	49.0	11.0
48	64	59	66	49.0	11.0
50	66	62	70	47.0	13.0
53	69	65	73	57.0	13.0
55	71	67	75	57.0	13.0
58	78	70	78	57.0	13.0
60	80	72	80	57.0	13.0
63	83	75	83	57.0	13.0
65	85	77	85	67.0	13.0
68	88	81	90	64.7	15.3
70	90	83	92	64.7	15.3
75	99	98	97	64.7	15.3
80	104	95	105	74.3	15.7
85	109	100	110	74.3	15.7
90	114	105	115	74.3	15.7
95	119	110	120	74.3	15.7
100	124	115	125	74.3	15.7



JIEXIN MECHANICAL SEAL CO., LTD

Contact: Huo Yuwei

WhatsApp: +0086 13925553104

Email: a13925553104@163.com

https://jiexinseal.en.alibaba.com/

Address: Sanhe Industrial Zone, Hengkeng, Liaobu Town, Dongguan, Guangdong



JIEXIN MECHANICAL SEAL CO., LTD

Contact: Huo Yuwei

WhatsApp: +0086 13925553104

Email: a13925553104@163.com

https://jiexinseal.en.alibaba.com/

Address: Sanhe Industrial Zone, Hengkeng, Liaobu Town, Dongguan, Guangdong



Mechanical seal JX-SE

Temperature: -20°C~180°C

Pressure: ≤3.0 mpa

Speed: ≤15m/sec

Materials


Rotary ring: SIC / TC.

Stationary ring: Carbon / SIC / TC.

Bellows: NBR / EPDM / VITON.

Spring: SS304.

Metal parts: SS304 / SS316.

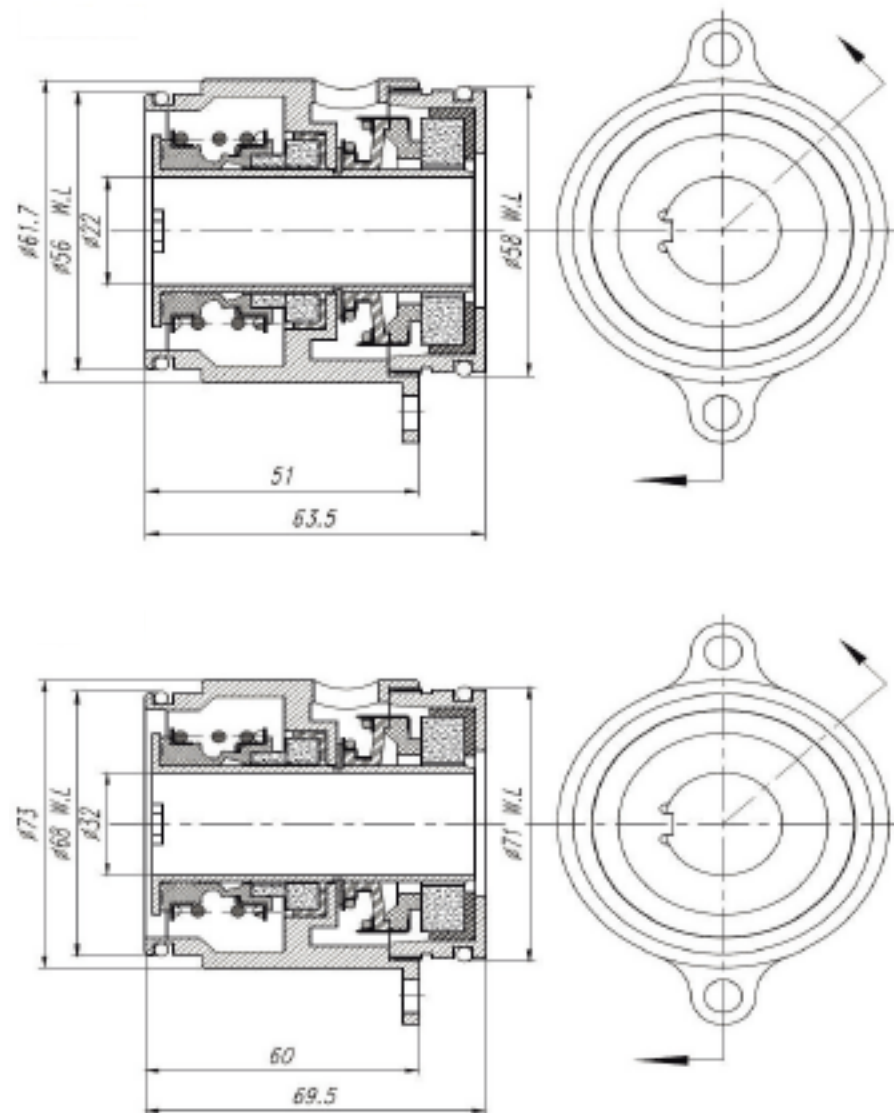

Mechanical seal JX-108U

Temperature: -20°C~150°C

Pressure: ≤0.6 mpa

Speed: ≤15m/sec

Materials


Rotary ring: SUS / SIC / TC.

Stationary ring: Carbon / SIC / TC.

Bellows: NBR / EPDM / VITON/PTFE.

Spring: SS304.

Metal parts: SS304

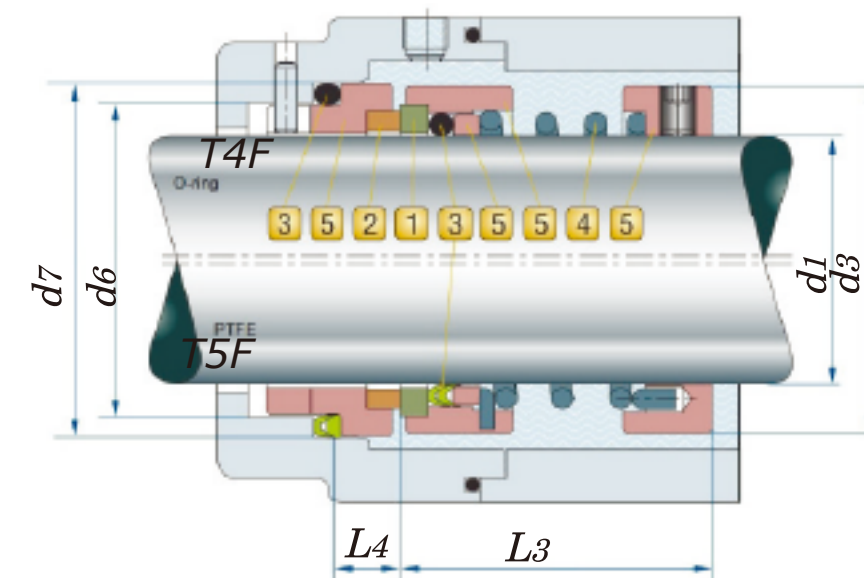

d1 (H6)	d3 (Max)	d6 (h8)	d7 (±0.5)	L3	L4
35	49	44	50	42	13
40	56	50	58	42	13
45	61	55	63	47	13
50	66	62	70	47	13
55	71	67	75	57	13
60	80	72	80	57	13
65	85	77	85	65	15
70	90	84	92	65	15
75	99	87	97	65	15
80	104	95	105	73	17
85	109	100	110	73	17



JIEXIN MECHANICAL SEAL CO., LTD

Contact: Huo Yuwei

WhatsApp: +0086 13925553104

Email: a13925553104@163.com

https://jiexinseal.en.alibaba.com/

Address: Sanhe Industrial Zone, Hengkeng, Liaobu Town, Dongguan, Guangdong



Mechanical seal JX-112

Temperature: -20°C~140°C

Pressure: ≤1.4 mpa

Speed: ≤15m/sec

Materials


Rotary ring: SIC / TC.

Stationary ring: Carbon / SIC / TC.

Bellows: NBR / EPDM / VITON.

Spring: SS304.

Metal parts: SS304

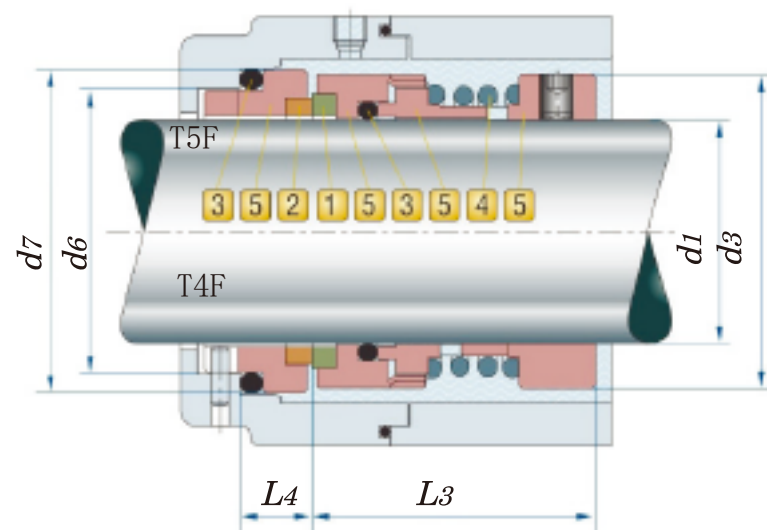

d1 (H6)	d3 (Max)	d4 (h8)	d7	L3 (±0.5)	L4
20	34	29	35	26.5	10.0
22	36	31	37	37.5	10.5
25	39	34	40	39.5	10.5
28	42	37	43	43.5	11.5
30	44	39	45	43.5	11.5
35	49	44	50	43.5	11.5
38	54	49	56	52.0	13.0
40	56	51	58	52.0	13.0
45	61	56	63	52.0	13.0
50	66	62	70	56.0	14.0
55	71	67	75	56.0	14.0
60	80	72	80	61.0	14.0
65	85	77	85	61.0	14.0
70	90	83	92	63.0	17.0
75	99	88	97	63.0	17.0
80	104	95	105	68.0	17.0



JIEXIN MECHANICAL SEAL CO., LTD

Contact: Huo Yuwei

WhatsApp: +0086 13925553104

Email: a13925553104@163.com

https://jiexinseal.en.alibaba.com/

Address: Sanhe Industrial Zone, Hengkeng, Liaobu Town, Dongguan, Guangdong



Mechanical seal JX-128/128P

Temperature: -20°C~200°C

Pressure: ≤0.8 mpa

Speed: ≤10m/sec

Materials


Rotary ring: SIC / TC.

Stationary ring: Carbon / SIC / TC.


Bellows: NBR / EPDM / VITON.

Spring: SS304.

Metal parts: SS304

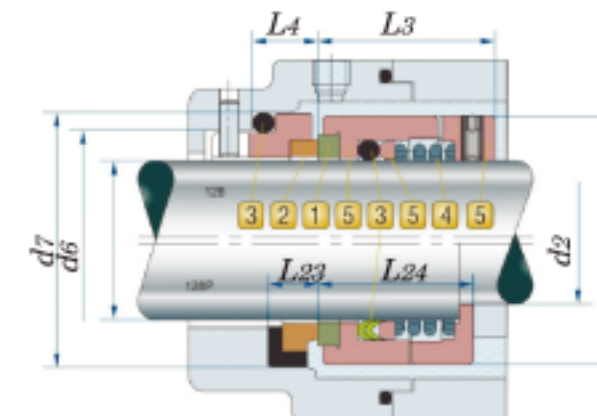

Type of counter ring

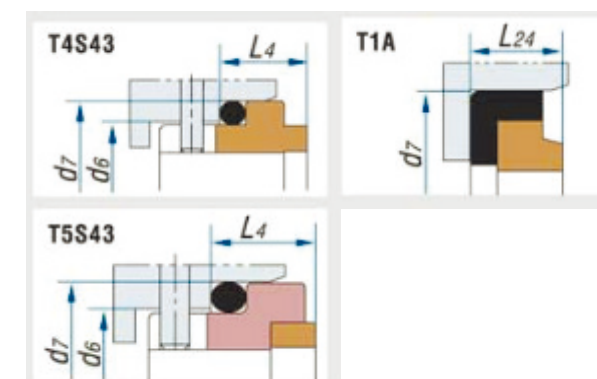

Single mechanical end seal JX-128/128P

Is applicable to the series pumps: SNM7N, Grundfos, Calpeda and another pumps.

Analog: W011U, Aesael W07D/W07DM, Flowserve Pac-Seal

JX-128

d1	d3 (Max)	d6	d7 (H8)	L3 (±0.5)	L4
20	34	29	35	35.0	10.0
22	36	31	37	35.0	10.0
25	39	34	40	40.0	10.0
28	42	37	43	40.0	10.0
30	44	39	45	40.0	10.0
35	49	44	50	45.0	10.0
38	54	49	56	44.0	11.0
40	56	51	58	44.0	11.0
45	61	56	63	49.0	11.0
50	66	62	70	47.0	13.0
55	71	67	75	57.0	13.0
60	80	72	80	57.0	13.0
65	85	77	85	67.0	13.0
70	90	83	92	64.7	15.3
75	99	88	97	64.7	15.3

JX-128P

d1	d2	d3 (Max)	d6	d7 (H8)	L23 (±0.5)	L24
18	14	32	27	33	19.5	6.5
20	16	34	29	35	19.5	6.5
22	18	36	31	37	22.0	6.5
25	20	39	34	40	25.0	8.0
28	23	42	37	43	27.5	8.5
30	25	44	39	45	27.5	8.5
35	30	49	44	50	29.5	8.5
38	33	54	49	56	30.5	9.5
40	35	56	51	58	30.5	9.5
45	40	61	56	63	30.5	9.5



JIEXIN MECHANICAL SEAL CO., LTD

Contact: Huo Yuwei

WhatsApp: +0086 13925553104

Email: a13925553104@163.com

https://jiexinseal.en.alibaba.com/

Address: Sanhe Industrial Zone, Hengkeng, Liaobu Town, Dongguan, Guangdong



JIEXIN MECHANICAL SEAL CO., LTD

Contact: Huo Yuwei

WhatsApp: +0086 13925553104

Email: a13925553104@163.com

https://jiexinseal.en.alibaba.com/

Address: Sanhe Industrial Zone, Hengkeng, Liaobu Town, Dongguan, Guangdong

Mechanical seal JX-113

Temperature: -40°C~150°C

Pressure: ≤0.6 mpa

Speed: ≤10m/sec

Materials


Rotary ring: SIC / TC.

Stationary ring: Carbon / SIC / TC.

Bellows: EPDM / VITON.

Spring: SS304.

Metal parts: SS304

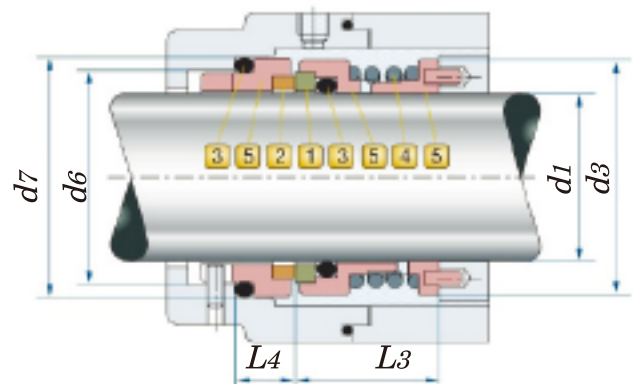

Type of counter ring

d1 (H6)	d3 (Max)	d6	d7 (h8)	L3 (±0.5)	L4
20	34	29	35	23.0	10.0
22	36	31	37	24.5	10.5
25	39	34	40	24.5	10.5
28	42	37	43	27.5	11.5
30	44	39	45	27.5	11.5
35	49	44	50	27.5	11.5
38	54	49	56	31.0	13.0
40	56	51	58	31.0	13.0
45	61	56	63	31.0	13.0
50	66	62	70	35.0	14.0
55	71	67	75	35.0	14.0
60	80	72	80	46.0	14.0
65	85	77	85	46.0	14.0
70	90	83	92	48.0	17.0
75	99	88	97	48.0	17.0
80	104	95	105	53.0	17.0

The mechanical seal JX-113 is used in centrifugal pumps, mixers and pumping stations.

Application in pumps Wilo, ABS, Alfa laval, Allweiler, APV, Calpeda, DAB, Ebara, EMU, Flugt, Fristam, Grundfos, Haigh, Hidrosta, Hilde, Inbeat, INOX, Inoxpa, GEA Tuchenhausen.

Analog of mechanical seals: AESSEAL, Flowserve Pac - Seal, ROTEN.

Mechanical seal JX-124

Temperature: -20°C~180°C

Pressure: ≤1.2 mpa

Speed: ≤15m/sec

Materials


Rotary ring: SIC / TC.

Stationary ring: Ceramic / SIC / TC.

Bellows: NBR / EPDM / VITON.

Spring: SS304

Metal parts: SS304

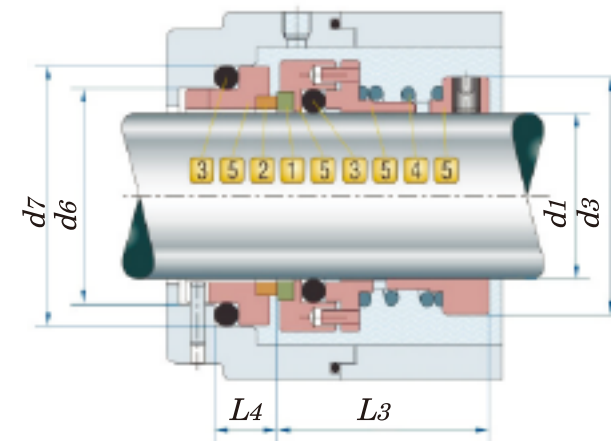

Type of counter ring

d1 (H6)	d3 (Max)	d6 (h8)	d7 (±0.5)	L3	L4 (h8)	L8
20	34	28,5	36	31.0	15	20
25	39	34,5	42	34.0	15	20
30	49	40,5	50	36.0	15	20
35	57	45,5	55	46,5	15	20
40	62	50,5	60	49,5	15	20
45	67	55,5	65	54,5	15	20
50	72	60,5	70	57,5	16	21
55	77	65,5	75	59,5	16	21
60	82	70,5	80	59,5	16	21
65	91	79,5	89	64,5	17	22
70	96	84,5	94	66,5	17	22
75	101	89,5	99	66,5	17	22
80	106	94,5	104	71,5	17	22
85	111	99,5	109	74,5	17	22
90	116	104,5	114	75,5	17	22
95	121	109,5	119	75,5	17	22

Single mechanical end seal JX-124

Is applicable to the series of pumps: SPERONI, Hydrosta, Grundfos. It is used at temperatures from -40 to + 120 degrees Celsius, with a pressure of up to 1.2 MPa and rotation speed of up to 15 m / sec.

Analogue: Burgman, Aesseal, Roten.



JIEXIN MECHANICAL SEAL CO., LTD

Contact: Huo Yuwei

WhatsApp: +0086 13925553104

Email: a13925553104@163.com

https://jiexinseal.en.alibaba.com/

Address: Sanhe Industrial Zone, Hengkeng, Liaobu Town, Dongguan, Guangdong



JIEXIN MECHANICAL SEAL CO., LTD

Contact: Huo Yuwei

WhatsApp: +0086 13925553104

Email: a13925553104@163.com

https://jiexinseal.en.alibaba.com/

Address: Sanhe Industrial Zone, Hengkeng, Liaobu Town, Dongguan, Guangdong

Mechanical seal JX-2500

Temperature: -20°C~180°C

Pressure: ≤1.2 mpa

Speed: ≤25m/sec

Materials


Rotary ring: SIC / TC.

Stationary ring: Carbon / SIC.


Bellows: NBR / EPDM / VITON / MVQ.

Spring: SS304 / SS316.

Metal parts: SS304 / SS316.

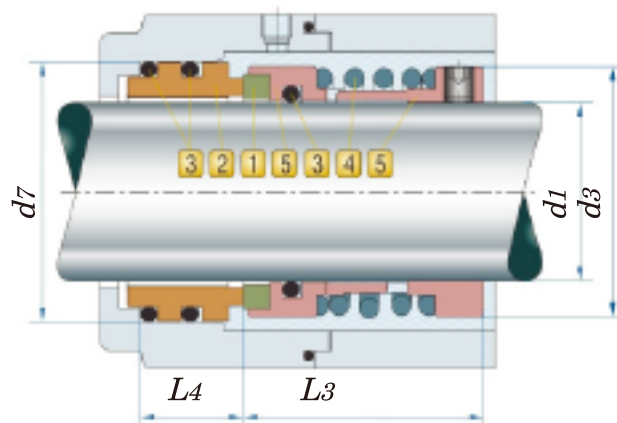

Type of counter ring

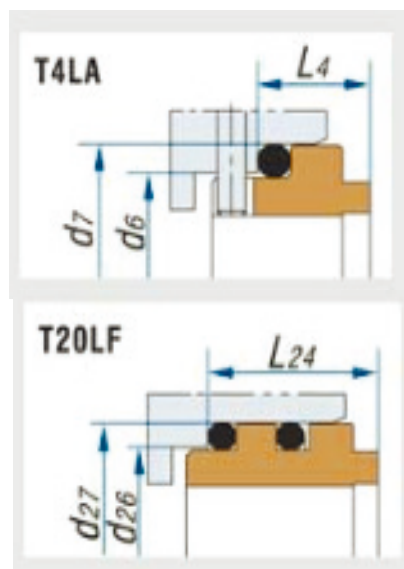

d1 (H6)	d3 (Max)	d6 (h8)	d7 (±0.5)	L3	L4 (h8)	d27	L24
20	34	29	35	41	13	37	23
22	36	31	37	41	13	39	23
24	38	33	39	43	13	-	-
25	39	34	40	43	13	40	23
28	42	37	43	45	13	44	23
30	44	39	45	45	13	47	24
33	47	42	48	45	13	48	24
35	49	44	50	49	13	51	24
38	54	50	56	53	13	54	24
40	56	52	58	55	13	57	24
43	59	55	61	55	13	-	-
45	61	57	63	55	13	61	24
48	64	60	66	55	13	64	24
50	66	62	68	60	13	67	24
53	69	65	71	61	13	-	-
55	71	67	73	61	13	73	24
58	76	70	79	63	16	76	24
60	78	72	81	63	16	80	26
63	81	75	84	63	16	83	26
65	83	77	86	67	16	86	26
70	90	83	92	68	16	89	26
75	95	88	97	72	16	95	26
80	100	96	105	72	16	99	26
85	105	101	110	77	16	108	26
90	110	106	115	77	16	111	26
95	115	111	120	82	16	114	26
100	120	116	125	82	16	118	26

Single mechanical seal JX-2500

Is used in centrifugal, sludge, and chemical pumps.

Mechanical seal JX-606

Temperature: -20°C~200°C

Pressure: ≤1.2 mpa

Speed: ≤25m/sec

Materials


Rotary ring: SUS / SIC / TC.

Stationary ring: Carbon / SIC.


Bellows: NBR / EPDM / VITON/PTFE.

Spring: SS304 / SS316.

Metal parts: SS304 / SS316.

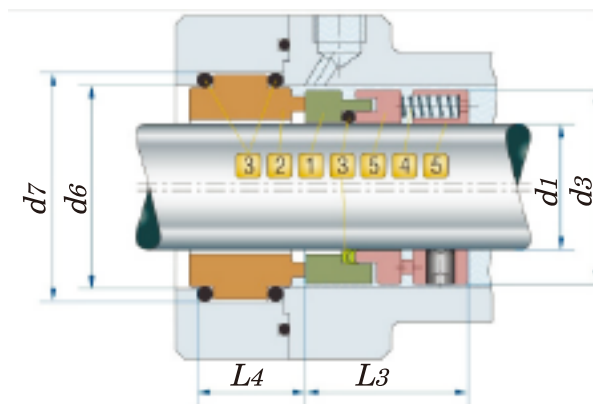

Type of counter ring

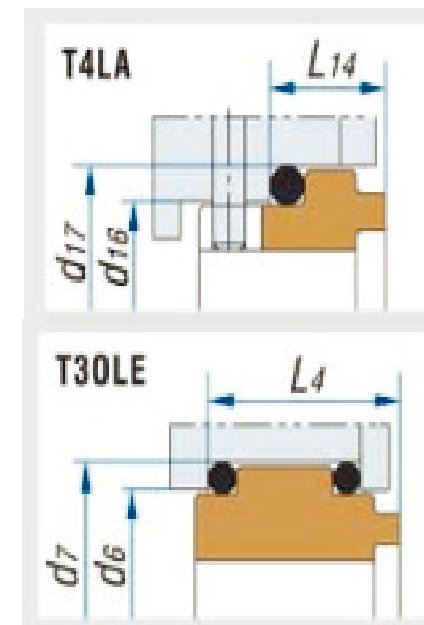

d1 (H6)	d3 (Max)	d6 (h8)	d7 (±0.5)	L3	L4 (h8)	d17	L14
20	34	36	42	35	23	35	13
22	36	38	44	35	23	37	13
24	38	40	46	35	23	39	13
25	39	41	47	35	23	40	13
28	42	44	50	35	23	43	13
30	44	46	52	35	23	45	13
32	46	48	54	35	23	48	13
33	47	49	55	35	23	48	13
35	49	51	57	35	23	50	13
38	54	58	64	38	25	56	13
40	56	60	66	38	25	58	13
43	59	63	69	38	25	61	13
45	61	65	71	38	25	63	13
48	64	68	74	38	25	66	13
50	66	70	76	38	25	68	13
53	69	73	79	40	25	71	13
55	71	75	81	40	25	73	13
58	76	83	89	41	28	79	16
60	78	85	91	41	28	81	16
63	81	88	94	41	28	84	16
65	83	90	96	41	28	86	16
68	86	93	99	41	30	90	16
70	90	95	101	41	30	92	16
75	95	104	110	42	30	97	16
80	100	109	115	42	31	105	16
85	105	114	120	42	31	110	16
90	110	119	125	45	31	115	16
95	115	124	130	45	31	120	16
100	120	129	135	45	31	125	16

Single mechanical end seal JX-606

Is applicable to the series pumps:
centrifugal, food, submersible etc.

Analogue: Burgman, Aesseal, Roten.



JIEXIN MECHANICAL SEAL CO., LTD

Contact: Huo Yuwei

WhatsApp: +0086 13925553104

Email: a13925553104@163.com

https://jiexinseal.en.alibaba.com/

Address: Sanhe Industrial Zone, Hengkeng, Liaobu Town, Dongguan, Guangdong



JIEXIN MECHANICAL SEAL CO., LTD

Contact: Huo Yuwei

WhatsApp: +0086 13925553104

Email: a13925553104@163.com

https://jiexinseal.en.alibaba.com/

Address: Sanhe Industrial Zone, Hengkeng, Liaobu Town, Dongguan, Guangdong

Mechanical seal JX-560D

Temperature: -20°C~80°C

Pressure: ≤ 0.3 mpa

Speed: ≤ 15 m/sec

Materials

Rotary ring: Carbon / SIC.

Stationary ring: Ceramic/SIC.

Bellows: NBR/VITON.

Spring: SS304 / SS316.

Metal parts: SS304 / SS316.

JX-560D

d1 (H6)	d3 (Max)	d7 (h8)	L (± 0.5)	L2	L4
13	25	25	36	5	5
14	30	30	37	5	5
15	30	30	37	5	5
16	30	30	37	5	5
18	35	38	49	7	10
19	35	38	49	7	10
20	38	44	49	7	7
25	44	50	51	7	7
30	50	57	59	9	8
35	58	64	61	9	9
40	64	70	64	11	9
45	66	70	65	10	9
50	72	80	69	10	9

Mechanical seal JX-560D

It is used in drainage and sewage pumps.

Analogue: EA560D Burgmann, John Crane 6, AESSEAL B04

The double end seal is an analogue of the Burgmann seal and fully corresponds to it in terms of technical characteristics, quality and reliability.

This type of seal is used in pumps, compressors, equipment for the food and chemical industries, etc. - it means wherever it is necessary to provide high-quality sealing of rotating shafts.

High reliability of the double face seal is provided by the design of the unit with two seals - primary and secondary. The main lubricant for the assembly operation is the product itself, with which the equipment works.

Mechanical seal JX-M74D

Temperature: -20°C~200°C

Pressure: ≤ 1.6 mpa

Speed: ≤ 20 m/sec

Materials

Rotary ring: Car / SIC / TC.

Stationary ring: Car / SIC / TC..


Bellows: EPDM / VITON / NBR.

Spring: SS304 / SS316.


Metal parts: SS304 / SS316.

JX-M74D

d1 (H6)	d3 (Max)	d6	d7 (h8)	L3 (± 0.5)	L4
18	33	27	33	38.0	11.5
20	35	29	35	38.0	11.5
22	37	31	37	38.0	11.5
24	39	33	39	38.0	11.5
25	40	34	40	38.0	11.5
28	43	37	43	39.0	11.5
30	45	39	45	39.0	11.5
32	47	42	48	39.0	11.5
33	48	42	48	39.0	11.5
35	50	44	50	39.0	11.5
38	55	49	56	41.0	14.0
40	57	51	58	42.0	14.0
43	60	54	61	42.0	14.0
45	62	56	63	42.0	14.0
48	65	59	66	42.0	14.0
50	67	62	70	43.0	15.0
53	70	65	73	43.0	15.0
55	72	67	75	43.0	15.0
58	79	70	78	56.0	15.0
60	81	72	80	56.0	15.0
63	84	75	83	55.0	15.0
65	86	77	85	55.0	15.0
68	89	81	90	55.0	18.0
70	91	83	92	56.0	18.0
75	99	88	97	56.0	18.0
80	104	95	105	56.0	18.2
85	109	100	110	56.0	18.2

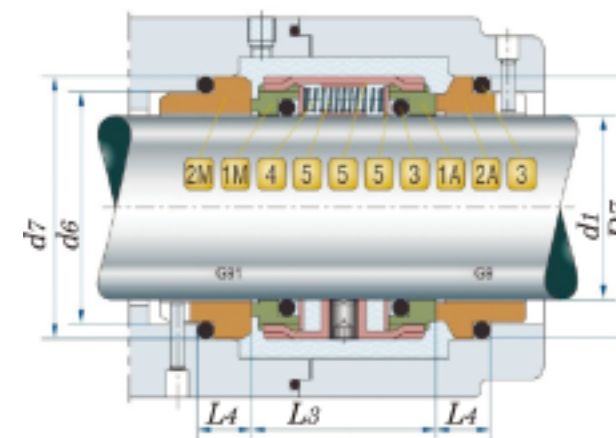

Type of counter ring

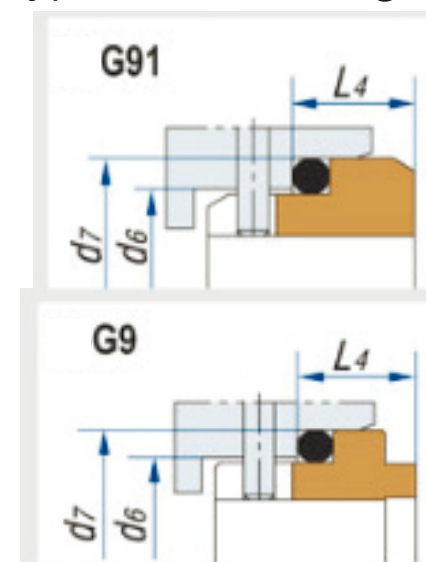

The JX-M74D double face seal

Used in fecal and submersible pumps for sewage, dirty water, or low-aggressive liquids.

Analogue: Burgmann M74D, Anga VD



JIEXIN MECHANICAL SEAL CO., LTD

Contact: Huo Yuwei

WhatsApp: +0086 13925553104

Email: a13925553104@163.com

https://jiexinseal.en.alibaba.com/

Address: Sanhe Industrial Zone, Hengkeng, Liaobu Town, Dongguan, Guangdong



JIEXIN MECHANICAL SEAL CO., LTD

Contact: Huo Yuwei

WhatsApp: +0086 13925553104

Email: a13925553104@163.com

https://jiexinseal.en.alibaba.com/

Address: Sanhe Industrial Zone, Hengkeng, Liaobu Town, Dongguan, Guangdong

Mechanical seal JX-202

Temperature: -20°C~180°C

Pressure: ≤0.5 mpa

Speed: ≤12m/sec

Materials


Rotary ring: SIC / TC.

Stationary ring: Carbon / SIC / TC.


Bellows: EPDM / VITON / NBR.

Spring: SS304 / SS316.

Metal parts: SS304 / SS316.

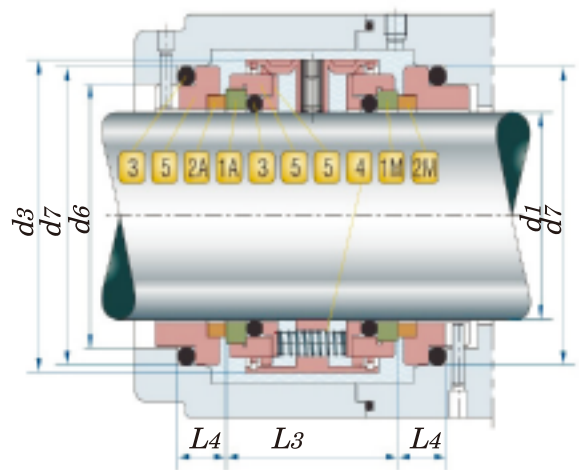

Type of counter ring

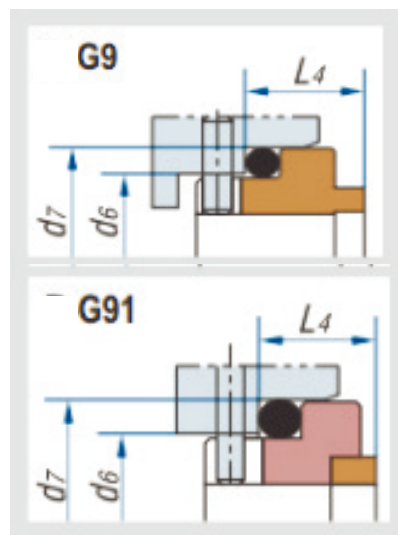

JX-202

d1 (H6)	d3 (Max)	d6	d7 (h8)	L3 (±0.5)	L4
20	38	29	35	39	11,5
25	43	34	40	39	11,5
30	48	39	45	39	11,5
35	53	44	50	40	11,5
40	61	51	58	45	14
45	66	56	63	45	14
50	73	62	70	46	15
55	78	67	75	46	15
60	83	72	80	56	15
65	88	77	85	56	15
70	95	83	92	58	18
75	100	88	97	58	18
80	108	95	105	58	18,2

Double mechanical seal JX-202

It is applied to fecal and submersible pumps for sewage, turbid water or slightly aggressive liquids with solid particles

Analogue: Crane 87 (EI/ EC) seal, Roplan RTH87/ R90

Mechanical seal JX-502

Temperature: -20°C~180°C

Pressure: ≤0.5 mpa

Speed: ≤12m/sec

Materials


Rotary ring: SIC / TC.

Stationary ring: Carbon / SIC / TC.

Bellows: EPDM / VITON / NBR.

Spring: SS304 / SS316.

Metal parts: SS304 / SS316.

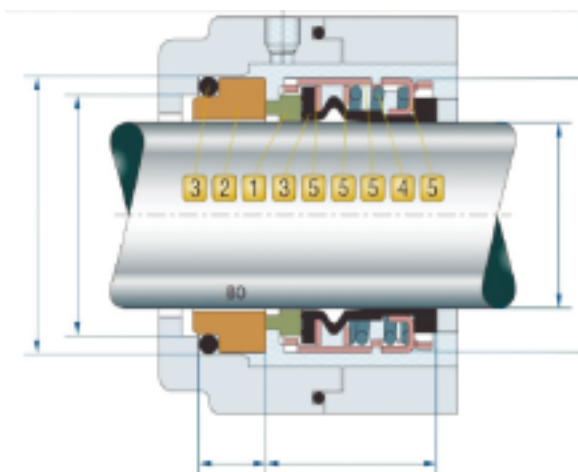

Single mechanical seal JX-502

Application in pumps Wilo, ABS, Alfa laval, Allweiler, GEA Tuchenhausen, INOX, Inoxpa, Jabsco, Johnson, KSB and another pumps.

Analogue: John Crane 502B, 8-1, Asseal B092SSU/SLU, STERLING 502, VULCAN 1724

JX-502	d1 (H6)	d3 (Max)	d7 (h8)	L3 (±0.5)	L4
	14	24	25	23.0	12.0
	16	26	27	23.0	12.0
	18	32	33	24.0	13.5
	20	34	35	24.0	13.5
	22	36	37	24.0	13.5
	24	38	39	26,7	13.3
	25	39	40	27.0	13.0
	28	42	43	30.0	12.5
	30	44	45	30.5	12.0
	32	46	48	30.5	12.0
	33	47	48	30.5	12.0
	35	49	50	30.5	12.0
	38	54	56	32.0	13.0
	40	56	58	32.0	13.0
	43	59	61	32.0	13.0
	45	61	63	32.0	13.0
	48	64	66	32.0	13.0
	50	66	70	34.0	13.5
	53	69	73	34.0	13.5
	55	71	75	34.0	13.5
	58	78	78	39.0	13.5
	60	80	80	39.0	13.5
	63	83	83	39.0	13.5
	65	85	85	39.0	13.5
	68	88	90	39.0	13.5
	70	89	92	45.5	14.5
	75	96	97	45.5	14.5
	80	104	105	45.0	15.0
	85	108	110	45.0	15.0
	90	114	115	50.0	15.0
	95	118	120	50.0	15.0
	100	124	125	50.0	15.0



JIEXIN MECHANICAL SEAL CO., LTD

Contact: Huo Yuwei

WhatsApp: +0086 13925553104

Email: a13925553104@163.com

https://jiexinseal.en.alibaba.com/

Address: Sanhe Industrial Zone, Hengkeng, Liaobu Town, Dongguan, Guangdong



JIEXIN MECHANICAL SEAL CO., LTD

Contact: Huo Yuwei

WhatsApp: +0086 13925553104

Email: a13925553104@163.com

https://jiexinseal.en.alibaba.com/

Address: Sanhe Industrial Zone, Hengkeng, Liaobu Town, Dongguan, Guangdong

Mechanical seal JX-104

Temperature: -20°C~80°C

Pressure: ≤0.8 mpa

Speed: ≤15m/sec

Materials


Rotary ring: SIC / TC.

Stationary ring: Carbon / SIC / TC.


Bellows: NBR / EPDM / VITON / PTFE.

Spring: SS304 / SS316.

Metal parts: SS304 / SS316.

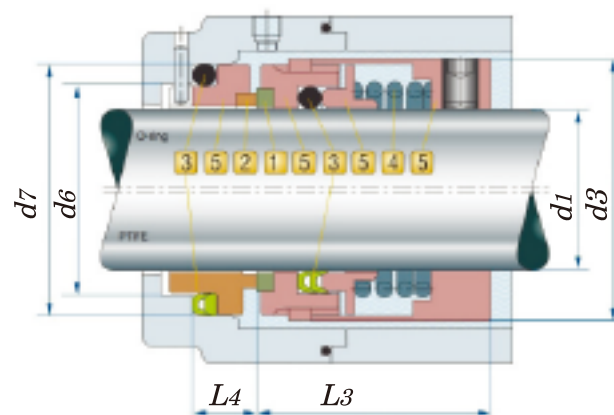

Type of counter ring

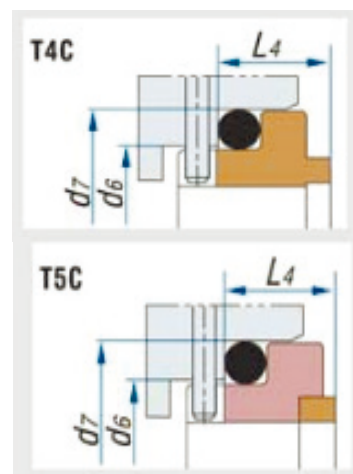


JX-104	d1 (H6)	d3 (Max)	d6 (h8)	d7	L3 (±0.5)	L4
16	16	33	25,5	33	37	12
18	18	35	28,5	36	40	12
20	20	37	30,5	40	40	14
22	22	39	32,5	42	43	14
25	25	42	35,5	45	43	14
28	28	45	38,5	48	44	14
30	30	52	40,5	50	49	14
35	35	57	45,5	55	51	14
40	40	62	50,5	60	54	14
45	45	67	55,5	65	60	14
50	50	72	60,5	70	63	14
55	55	77	65,5	75	65	14
60	60	82	70,5	80	65	14
65	65	92	80,5	90	74	17
70	70	97	85,5	97	76	19
75	75	102	90,5	102	76	19
80	80	107	95,5	107	81	19
85	85	112	100,5	112	82	19
90	90	117	105,5	117	83	19
95	95	122	110,5	122	83	19
100	100	127	115,5	127	83	19
110	110	141	130,5	142	105	21
120	120	151	140,5	152	105	21


Single mechanical seal JX-104

Application in pumps Applicable in pumps Hidrostat, Inbeat, Grundfos, Haigh, Hilde, INOX, Inoxpa, Jabsco, Johnson and another pumps.

Analogue: Burgmann, John Crane, Flowserve, Latty, Roten, Sealol.

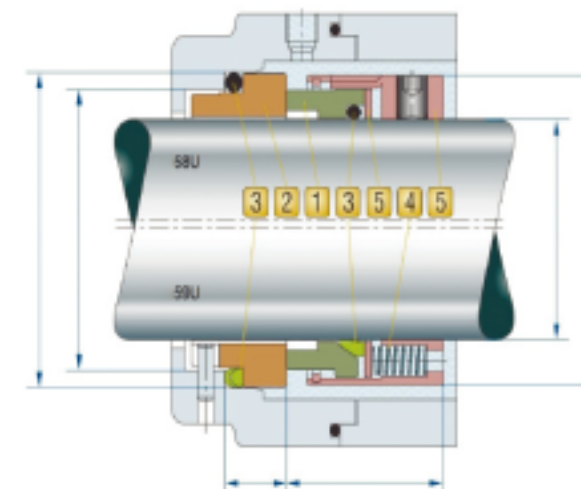

Type of counter ring

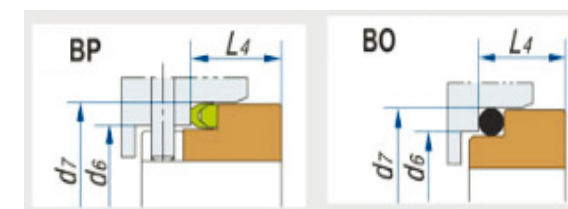

Single mechanical seal series JX-58U/59U

Is applicable to the pumps of Ebara, Lowara, Colfax, Houttuin series.

Analogue: John Crane T109, T9, T909 seal Roten 90 seal Sealol T seal Sterling 290 seal, Vulcan 1659.

Mechanical seal JX-58U/59U

Temperature: -40°C~200°C

Pressure: ≤1.7 mpa

Speed: ≤25m/sec

Materials

Rotary ring: Carbon / SIC / TC.

Stationary ring: SIC / TC / SUS.

Bellows: EPDM / VITON / PTFE.

Spring: SSS304 / SS316.

Metal parts: SS304 / SS316.

JX-58U/59U

JX-58U/59U	d1 (H6)	d3 (Max)	d6 (h8)	d7	L3 (±0.5)	L4
18	18	32	27	33	24.0	13.5
20	20	34	29	35	24.0	13.5
22	22	36	31	37	24.0	13.5
24	24	38	33	39	26.7	13.3
25	25	39	34	40	27.0	13.0
28	28	42	37	43	30.0	12.5
30	30	44	39	45	30.5	12.0
32	32	46	42	48	30.5	12.0
33	33	47	42	48	30.5	12.0
35	35	49	44	50	30.5	12.0
38	38	54	49	56	32.0	13.0
40	40	56	51	58	32.0	13.0
43	43	59	54	61	32.0	13.0
45	45	61	56	63	32.0	13.0
48	48	64	59	66	32.0	13.0
50	50	66	62	70	34.0	13.5
53	53	69	65	73	34.0	13.5
55	55	71	67	75	34.0	13.5
58	58	78	70	78	39.0	13.5
60	60	80	72	80	39.0	13.5
63	63	83	75	83	39.0	13.5
65	65	85	77	85	39.0	13.5
68	68	88	81	90	39.0	13.5
70	70	90	83	92	45.5	14.5
75	75	95	88	97	45.5	14.5
80	80	104	95	105	45.5	15.0
85	85	109	100	110	45.5	15.0
90	90	114	105	115	50.0	15.0
95	95	119	110	120	50.0	15.0
100	100	124	115	125	50.0	15.0



JIEXIN MECHANICAL SEAL CO., LTD

Contact: Huo Yuwei

WhatsApp: +0086 13925553104

Email: a13925553104@163.com

https://jiexinseal.en.alibaba.com/

Address: Sanhe Industrial Zone, Hengkeng, Liaobu Town, Dongguan, Guangdong



JIEXIN MECHANICAL SEAL CO., LTD

Contact: Huo Yuwei

WhatsApp: +0086 13925553104

Email: a13925553104@163.com

https://jiexinseal.en.alibaba.com/

Address: Sanhe Industrial Zone, Hengkeng, Liaobu Town, Dongguan, Guangdong

Mechanical seal JX-102U

Temperature: -30°C~180°C

Pressure: ≤1.2 mpa

Speed: ≤10m/sec

Materials


Rotary ring: SIC / TC.

Stationary ring: Carbon / SIC / TC.


Bellows: EPDM / VITON.

Spring: SSS304 / SS316.

Metal parts: SS304 / SS316.

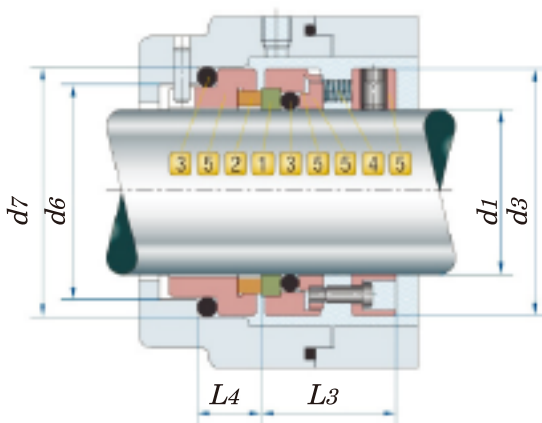

Type of counter ring

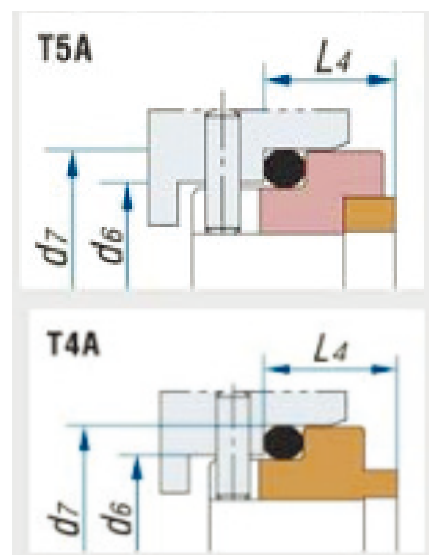

JX-102U

d1 (H6)	d3 (Max)	d6	d7 (h8)	L3 (±0.5)	L4
25	40	34	40	26.0	10.5
28	43	37	43	26.0	11.5
30	45	39	45	26.0	11.5
35	50	44	50	30.0	11.5
40	56	51	58	35.0	13.0
45	62	56	63	37.0	13.0
50	69	62	70	38.0	14.0
55	74	67	75	38.0	14.0
60	79	72	80	38.0	14.0
65	84	77	85	39.0	14.0
70	91	83	92	39.0	17.0
75	96	88	97	42.0	17.0
80	104	95	105	42.0	17.0
85	109	100	110	42.0	17.0

Single end seal JX-120U

It is used in pumps of the Sarlin, Tuchenhausen, Hilge, HM, HMS series and etc. It is used at temperatures from -40 to +120 degrees Celsius, with a pressure of up to 1.2 MPa and rotation speed of up to 10 m/sec.

Analogue: John Crane T109, T9, T909 seal Roten 90 seal, Sealol T seal, Sterling 290 seal.

Mechanical seal JX-HJ92N

Temperature: -20°C~200°C

Pressure: ≤2.5 mpa

Speed: ≤25m/sec

Materials


Rotary ring: Carbon / SIC

Stationary ring: SIC / TC.


Bellows: NBR / EPDM / VITON.

Spring: SSS304 / SS316.

Metal parts: SS304 / SS316.

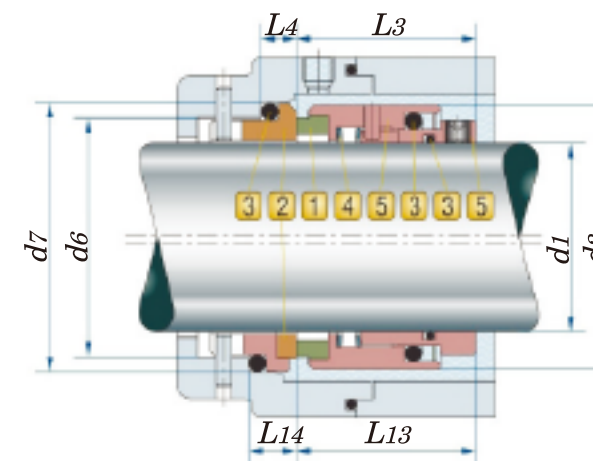

Type of counter ring

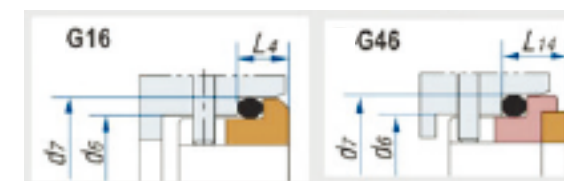

Single end seal JX-HJ92N

It is used for Alfa Laval, Ebara (3M, DWO), Lowara, KSB (Etanorm, Etachrom), WILO (MVI, MHI, IPL/DPL), Grundfos (CDM), Saer (IP), and (IP), Calpeda (GM, MXS), Hecker HN 410SU pumps.

Analogue: SHJ97 Burgmann HJ92N seal, Roten seal EHS3, AESSEAL MO10.

d1 (H6)	d3 (Max)	d6 (h8)	d7	L3 (±0.5)	L4	L13	L14
18	32	27	33	30.5	7.0	28.5	9.0
20	34	29	35	30.5	7.0	28.5	9.0
22	36	31	37	30.5	7.0	28.5	9.0
24	38	33	39	33.0	7.0	31.0	9.0
25	39	34	40	33.0	7.0	31.0	9.0
28	42	37	43	35.5	7.0	33.0	9.5
30	44	39	45	35.5	7.0	33.0	9.5
32	47	42	48	35.5	7.0	33.0	9.5
33	47	42	48	35.5	7.0	33.0	9.5
35	49	44	50	35.5	7.0	33.0	9.5
38	54	49	56	37.0	8.0	34.5	10.5
40	56	51	58	37.0	8.0	34.5	10.5
43	59	54	61	37.0	8.0	34.5	10.5
45	61	56	63	37.0	8.0	34.5	10.5
48	64	59	66	37.0	8.0	34.5	10.5
50	66	62	70	38.0	9.5	35.5	12.0
53	69	65	73	38.0	9.5	35.5	12.0
55	71	67	75	38.0	9.5	35.5	12.0
58	78	70	78	42.0	10.5	39.5	13.0
60	80	72	80	42.0	10.5	39.5	13.0
63	83	75	83	42.0	10.5	39.5	13.0
65	85	77	85	42.0	10.5	39.5	13.0
68	88	81	90	41.5	11.0	39.0	13.5
70	90	83	92	48.5	11.5	46.0	14.0
75	99	88	97	48.5	11.5	46.0	14.0
80	104	95	105	48.5	11.5	46.0	14.0
85	109	100	110	48.5	11.5	46.0	14.0
90	114	105	115	52.0	13.0	49.5	15.5
95	119	110	120	52.0	13.0	49.5	15.5
100	124	115	125	52.0	13.0	49.5	15.5



JIEXIN MECHANICAL SEAL CO., LTD

Contact: Huo Yuwei

WhatsApp: +0086 13925553104

Email: a13925553104@163.com

https://jiexinseal.en.alibaba.com/

Address: Sanhe Industrial Zone, Hengkeng, Liaobu Town, Dongguan, Guangdong



JIEXIN MECHANICAL SEAL CO., LTD

Contact: Huo Yuwei

WhatsApp: +0086 13925553104

Email: a13925553104@163.com

https://jiexinseal.en.alibaba.com/

Address: Sanhe Industrial Zone, Hengkeng, Liaobu Town, Dongguan, Guangdong



Mechanical seal JX-FLWT80

Temperature: -20°C~400°C

Pressure: ≤2.5 mpa

Speed: ≤15m/sec

Materials


Rotary ring: Carbon/ SIC / TC.

Stationary ring: SIC / SUS / TC.


Bellows: M6/T6

Spring: SSS304 / SS316.

Metal parts: SS304 / SS316.

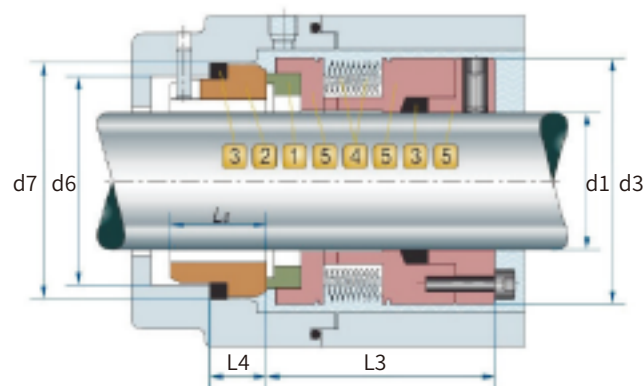

Type of counter ring



Mechanical end seal JX-FLWT80 with metal welded bellows.

Used in pumps: Lowara, Ebara (3M), EMU, Flugt, Fristam, GEA Tuchenhausen, Goetze, etc.

Analogue: Burgmann MBS100, MFLWT 80, MFLCT.

d1 (H6)	d3 (Max)	d6 (h8)	d7 (±0.5)	L3	L4 (h8)	L8
18	40	31	37	46.5	11.5	19.5
20	42	34	40	46.5	11.5	19.5
22	44	37	43	46.5	11.5	19.5
24	46	37	43	46.5	11.5	19.5
25	47	39	45	46.5	11.5	19.5
28	50	42	48	46.5	11.5	19.5
30	52	44	50	46.5	11.5	19.5
32	54	49	56	46.5	14.0	22.0
33	55	49	56	46.5	14.0	22.0
35	57	51	58	46.5	14.0	22.0
38	60	54	61	46.5	14.0	22.0
40	66	56	63	47.5	14.0	22.0
43	69	59	66	47.5	14.0	22.0
45	71	62	70	47.5	15.0	23.0
48	74	65	73	47.5	15.0	23.0
50	76	67	75	47.5	15.0	23.0
53	79	70	78	47.5	15.0	23.0
55	81	72	80	47.5	15.0	23.0
58	85	75	83	53.0	15.0	23.0
60	87	77	85	53.0	15.0	23.0
63	90	81	90	53.0	18.0	26.0
65	92	83	92	53.0	18.0	26.0
68	95	88	97	53.0	18.0	26.0
70	97	88	97	53.0	18.0	26.0
75	102	95	105	52.8	18.2	26.2
80	107	100	110	52.8	18.2	26.2
85	112	105	115	52.8	18.2	26.2
90	117	110	120	53.8	17.2	25.2
95	122	115	125	53.8	17.2	25.2
100	127	122	134.3	54.0	20.0	30.0



Mechanical seal JX-RFL85N

Temperature: -20°C~260°C

Pressure: ≤2.5 mpa

Speed: ≤15m/sec

Materials


Rotary ring: Carbon/ SIC / TC.

Stationary ring: SIC / SUS / TC.


Bellows: M6/T6/M3

Spring: SSS304 / SS316.

Metal parts: SS304 / SS316.

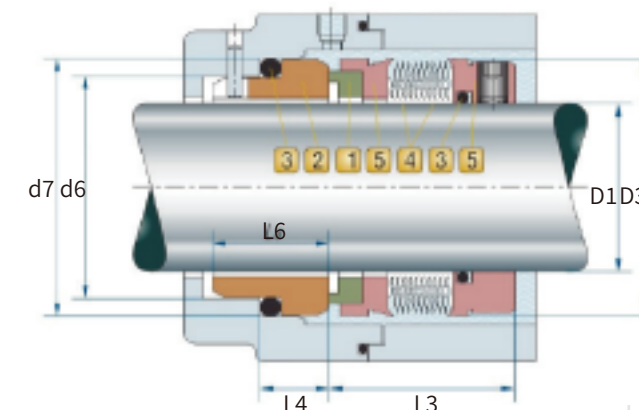

Type of counter ring

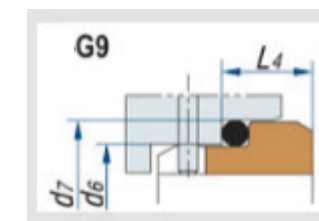

Single mechanical end seal JX-RFL85N

Used in pumps: Lowara, Ebara (3M), EMU, Flugt, Fristam, GEA Tuchenhausen, Goetze, etc.

Analogue: Burgmann MFL85N, MFLWT, MFLCT

d1 (H6)	d3 (Max)	d6 (h8)	d7	L3 (±0.5)	L4	L6 (h8)
18	32.0	27	33	30.5	7.0	14.0
20	33.5	29	35	30.5	7.0	14.0
22	36.5	31	37	30.5	7.0	14.0
24	39.0	33	39	28.5	11.5	19.5
25	39.6	34	40	28.5	11.5	19.5
28	42.8	37	43	31.0	11.5	19.5
30	45.0	39	45	31.0	11.5	19.5
32	46.0	42	48	31.0	11.5	19.5
33	48.0	42	48	31.0	11.5	19.5
35	49.2	44	50	31.0	11.5	19.5
38	52.3	49	56	31.0	14.0	22.0
40	55.5	51	58	31.0	14.0	22.0
43	57.5	54	61	31.0	14.0	22.0
45	58.7	56	63	31.0	14.0	22.0
48	61.9	59	66	31.0	14.0	22.0
50	65.0	62	70	32.5	15.0	23.0
53	68.2	65	73	32.5	15.0	23.0
55	70.0	67	75	32.5	15.0	23.0
58	71.7	70	78	37.5	15.0	23.0
60	74.6	72	80	37.5	15.0	23.0
63	79.0	75	83	37.5	15.0	23.0
65	84.1	77	85	37.5	15.0	23.0
68	87.3	81	90	34.5	18.0	26.0
70	87.3	83	92	42.0	18.0	26.0
75	95.0	88	97	42.0	18.0	26.0
80	98.4	95	105	41.8	18.2	26.2
85	104.7	100	110	41.8	18.2	26.2
90	111.0	105	115	46.8	18.2	26.2
95	114.0	110	120	47.8	17.2	25.2
100	117.4	115	125	47.8	17.2	25.2



JIEXIN MECHANICAL SEAL CO., LTD

Contact: Huo Yuwei

WhatsApp: +0086 13925553104

Email: a13925553104@163.com

https://jiexinseal.en.alibaba.com/

Address: Sanhe Industrial Zone, Hengkeng, Liaobu Town, Dongguan, Guangdong



JIEXIN MECHANICAL SEAL CO., LTD

Contact: Huo Yuwei

WhatsApp: +0086 13925553104

Email: a13925553104@163.com

https://jiexinseal.en.alibaba.com/

Address: Sanhe Industrial Zone, Hengkeng, Liaobu Town, Dongguan, Guangdong

Mechanical seal JX-109/8U

Temperature: -40°C~200°C

Pressure: ≤2.4 mpa

Speed: ≤25m/sec

Materials


Rotary ring: Carbon / SIC.

Stationary ring: SIC / TC.

Bellows: EPDM / VITON / PTFE.

Spring: SSS304 / SS316.

Metal parts: SS304 / SS316.

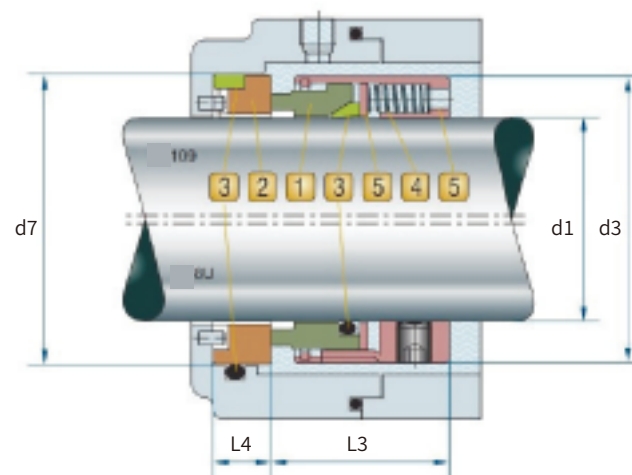

Type of counter ring



Single mechanical end seal JX-109/8U

The mechanical seals of this series have a compact structure and high resistance to aggressive media. Flugt, Fristam, GEA Tuchenhausen, Goetze, etc.

Analogue: John Crane 109, 8-1, Asseal.

JX-109 (Inch)

	d1 (H6)	d3 (Max)	d7 (h8)	L3 (±0.5)	L4	D10 (h8)	L20
0.750	19.05	34.0	34.93	22.2	10.3	48.0	17.6
0.875	22.23	37.2	38.10	23.8	10.3	51.0	17.6
1.000	25.40	40.3	41.28	25.4	11.1	54.0	17.6
1.125	28.58	43.5	44.45	27.0	11.1	62.0	27.0
1.250	31.75	48.3	47.63	27.0	11.1	68.0	27.0
1.375	34.93	51.5	50.80	28.6	11.1	71.0	27.0
1.500	38.10	54.6	53.98	28.6	11.1	78.0	27.0
1.625	41.28	61.0	60.33	35.0	12.7	81.0	27.0
1.750	44.45	64.2	63.50	35.0	12.7	84.0	27.0
1.875	47.63	67.3	66.68	35.0	12.7	87.0	27.0
2.000	50.80	70.5	69.85	35.0	12.7	97.0	33.3
2.125	53.98	76.9	76.20	43.0	14.3	100.0	33.3
2.250	57.15	80.0	79.38	43.0	14.3	103.0	33.3
2.375	60.33	83.2	82.55	43.0	14.3	106.0	33.3
2.500	63.50	86.4	85.73	43.0	14.3	110.0	33.3
2.625	66.68	89.6	85.73	43.0	15.9	113.0	33.3
2.750	69.85	92.7	88.90	43.0	15.9	116.0	33.3
2.875	73.03	98.9	95.25	43.0	15.9	117.0	33.3
3.000	76.02	97.5	98.43	43.0	15.9	121.0	33.3
3.125	79.38	100.7	101.60	43.0	19.8	-	33.3
3.250	82.55	105.4	104.78	43.0	19.8	132.0	33.3
3.375	85.73	108.6	107.95	43.0	19.8	-	33.3
3.500	88.90	111.8	111.13	43.0	19.8	138.0	33.3
3.625	92.08	115.0	114.30	43.0	19.8	-	33.3
3.750	95.25	118.1	117.48	43.0	19.8	144.0	33.3
3.875	98.43	121.3	120.65	43.0	19.8	-	33.3
4.000	101.60	124.5	123.83	43.0	19.8	151.0	33.3

Mechanical seal JX-58B/59B

Temperature: -40°C~200°C

Pressure: ≤2.5 mpa

Speed: ≤25m/sec

Materials


Rotary ring: Carbon / SIC / TC.

Stationary ring: SIC / TC / SUS.


Bellows: EPDM / VITON / PTFE.

Spring: SSS304 / SS316.

Metal parts: SS304 / SS316.

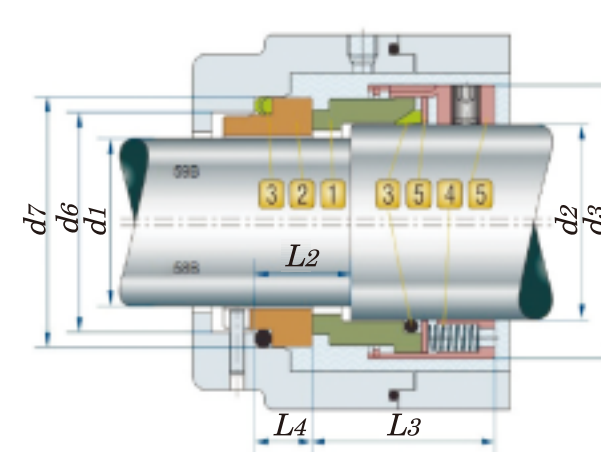

Type of counter ring

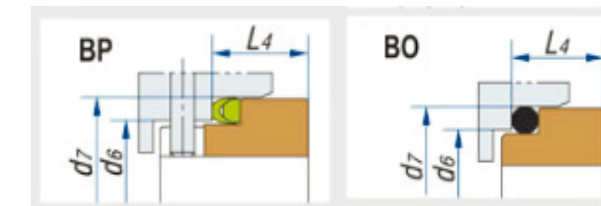

Single mechanical seal of JX-59B, JX-58B series is applied to the pumps of the following series: Ebara, Hidrostat, Godwin and etc.

Analogue: JohnCraneT109, T9,T909 seal
Roten 90 seal, Sealol T seal, Sterling 290 seal.

d1 (H6)	d2 (Max)	d3 (h8)	d6 (±0.5)	d7	L2 (h8)	L3	L4
16	20	34	23	27	18	30.5	12.0
18	22	36	27	33	20	31.5	13.5
20	24	38	29	35	20	31.5	13.5
22	26	40	31	37	20	31.5	13.5
24	28	42	33	39	20	34.2	13.3
25	30	44	34	40	20	34.5	13.0
28	33	47	37	43	20	37.5	12.5
30	35	49	39	45	20	38.0	12.0
32	38	54	42	48	20	38.0	12.0
33	38	54	42	48	20	38.0	12.0
35	40	56	44	50	20	38.0	12.0
38	43	59	49	56	23	39.5	13.0
40	45	61	51	58	23	39.5	13.0
43	48	64	54	61	23	39.5	13.0
45	50	66	55	63	23	39.5	13.0
48	53	69	59	66	23	39.5	13.0
50	55	71	62	70	25	44.0	13.5
53	58	78	65	73	25	44.0	13.5
55	60	80	67	75	25	44.0	13.5
58	63	83	70	78	25	49.0	13.5
60	65	85	72	80	25	49.0	13.5
63	68	88	75	83	25	49.0	13.5
65	70	90	77	85	25	49.0	13.5
70	75	95	83	92	28	55.5	14.5
75	80	104	88	97	28	55.5	14.5
80	85	109	95	105	28	55.0	15.0
85	90	114	100	110	28	60.0	15.0
90	95	119	105	115	28	60.0	15.0
95	100	124	110	120	28	60.0	15.0
100	105	129	115	125	28	60.0	15.0



JIEXIN MECHANICAL SEAL CO., LTD

Contact: Huo Yuwei WhatsApp:+0086 13925553104
Email:a13925553104@163.com https://jiexinseal.en.alibaba.com/
Address: Sanhe Industrial Zone, Hengkeng, Liaobu Town, Dongguan, Guangdong



JIEXIN MECHANICAL SEAL CO., LTD

Contact: Huo Yuwei WhatsApp:+0086 13925553104
Email:a13925553104@163.com https://jiexinseal.en.alibaba.com/
Address: Sanhe Industrial Zone, Hengkeng, Liaobu Town, Dongguan, Guangdong




Mechanical seal JX-AL

Temperature: -20°C~150°C
Pressure: ≤0.6 mpa
Speed: ≤15m/sec


Materials

Rotary ring: Carbon
Stationary ring: SIC / TC
Bellows: EPDM
Spring: SSS304 / SS316.
Metal parts: SS304 / SS316.

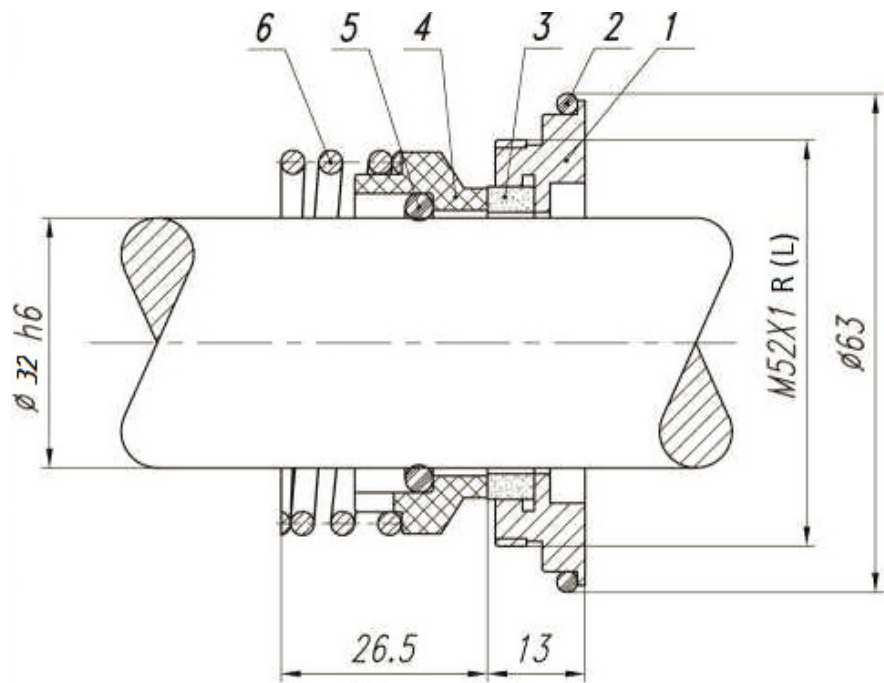


Single mechanical end seal JX-AL

Application in ALFA LAVAL LKH Series pump
Analog: AESSEAL T07 / T07D / T07X, Burgmann M2N, Roten UNITEN 22, Hecker HN 400A.

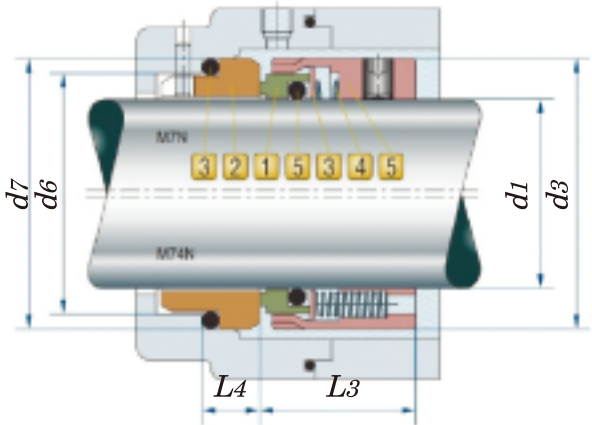

Type of counter ring

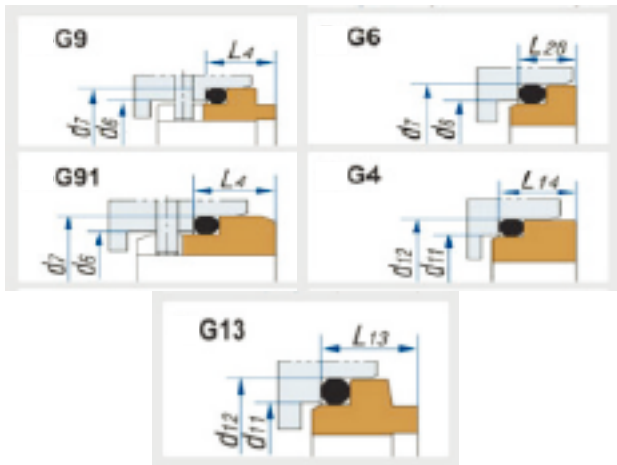

Single mechanical seal JX-M7N / M74N
Used in pumps: Lowara, Ebara (3M), EMU, Flugt, Fristam, GEA Tuchenhausen, Goetze, etc.
Analogue: Burgmann M7N, M74, Aesseal W07DM, W07DMB, Vulcan 1677.

Mechanical seal JX-M7N/M74N

Temperature: -20°C~200°C
Pressure: ≤1.6 mpa
Speed: ≤20m/sec

Materials

Rotary ring: Carbon / SIC / SUS.
Stationary ring: Carbon/SIC/SUS.
Bellows: EPDM / VITON.
Spring: SSS304 / SS316.
Metal parts: SS304 / SS316.

d1 (H6)	d3 (Max)	d7 (h8)	L3 (±0.5)	L4	L28	d12 (h8)	L13	L14
16	27	27	25.0	10.0	6.6	28.0	9.0	7.5
18	33	33	26.0	11.5	7.5	30.0	10.0	8.0
20	35	35	26.0	11.5	7.5	35.0	9.5	7.5
22	37	37	26.0	11.5	7.5	35.0	9.5	7.5
24	39	39	28.5	11.5	7.5	38.0	9.5	7.5
25	40	40	28.5	11.5	7.5	38.0	9.5	7.5
28	43	43	31.0	11.5	7.5	42.0	11.0	9.0
30	45	45	31.0	11.5	7.5	45.0	11.0	10,5
32	47	48	31.0	11.5	7.5	48.0	11.0	10,5
33	48	48	31.0	11.5	7.5	50.0	11.5	10,5
35	50	50	31.0	11.5	9.0	52.0	11.5	11.0
38	55	56	31.0	14.0	9.0	55.0	11.5	10.3
40	57	58	31.0	14.0	9.0	58.0	11.5	10.8
43	60	61	31.0	14.0	9.0	62.0	14.3	12.0
45	62	63	31.0	14.0	9.0	64.0	14.3	11.6
48	65	66	31.0	14.0	9.0	68.4	14.3	11.6
50	67	70	32.5	15.0	9.5	69.3	14.3	11.6
53	70	73	32.5	15.0	11.0	72.3	14.3	12.3
55	72	75	32.5	15.0	11.0	75.4	15.3	13.3
60	81	80	37.5	15.0	11.0	80.4	15.3	13.3
63	84	83	37.5	15.0	11.0	83.4	15.3	13.3
65	86	85	37.5	15.0	11.0	85.4	15.3	13.0
68	89	90	34.5	18.0	11.3	91.5	16.0	13.7
70	91	92	42.0	18.0	11.3	92.0	15.3	13.0
75	99	97	42.0	18.0	11.3	99.0	15.3	14.8
80	104	105	41.8	18.2	12.0	104.0	16.3	14.8
85	109	110	41.8	18.2	14.0	109.0	16.3	14.8
90	114	115	46.8	18.2	14.0	114.0	16.3	14.8
95	119	120	47.8	17.2	14.0	120.3	17.3	15.8
100	124	125	47.8	17.2	14.0	123.3	17.3	15.8
105	138	134.3	47.0	20.0	-	-	-	-
110	143	140.3	47.0	20.0	-	-	-	-
115	148	148.3	47.0	20.0	-	-	-	-
120	153	150.3	47.0	20.0	-	-	-	-
125	158	154.3	47.0	20.0	-	-	-	-



JIEXIN MECHANICAL SEAL CO., LTD

Contact: Huo Yuwei

WhatsApp:+0086 13925553104

Email:a13925553104@163.com

https://jiexinseal.en.alibaba.com/

Address: Sanhe Industrial Zone, Hengkeng, Liaobu Town, Dongguan, Guangdong



Mechanical seal JX-109B/8B-1

Temperature: -20°C~200°C

Pressure: ≤5.8 mpa

Speed: ≤25m/sec

Materials


Rotary ring: Carbon / SIC

Stationary ring: SIC/SUS.


Bellows: EPDM / VITON / PTFE

Spring: SSS304 / SS316.

Metal parts: SS304 / SS316.

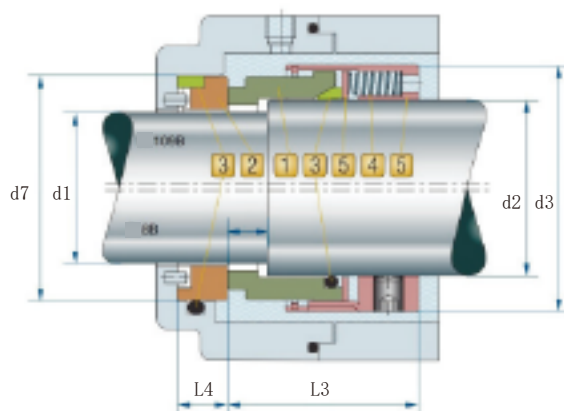

Type of counter ring

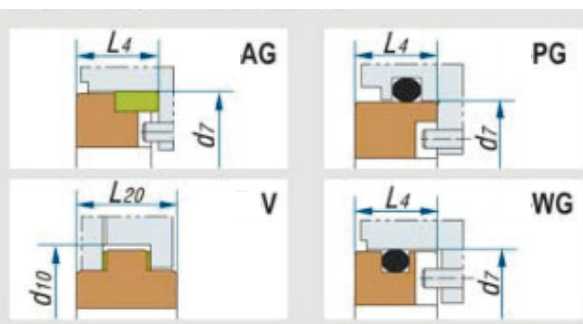

Single mechanical seal JX-109B/8B-1

Used in pumps: Lowara, Ebara (3M), EMU, Flugt, Fristam, GEA Tuchenhausen, Goetze, etc.

Analogue: John Crane type 109B, Vulcan 1609B, John Crane type 8B-1, Vican 1609 BS.



JIEXIN MECHANICAL SEAL CO., LTD

Contact: Huo Yuwei

WhatsApp:+0086 13925553104

Email:a13925553104@163.com

https://jiexinseal.en.alibaba.com/

Address: Sanhe Industrial Zone, Hengkeng, Liaobu Town, Dongguan, Guangdong



Mechanical seal JX-10T/10R

Temperature: -20°C~120°C

Pressure: ≤0.8 mpa

Speed: ≤13m/sec

Materials


Rotary ring: Carbon / SIC

Stationary ring: SIC / TC / Ceramic/ SUS.


Bellows: PTFE.

Spring: SSS304 / SS316.

Metal parts: SS304 / SS316.

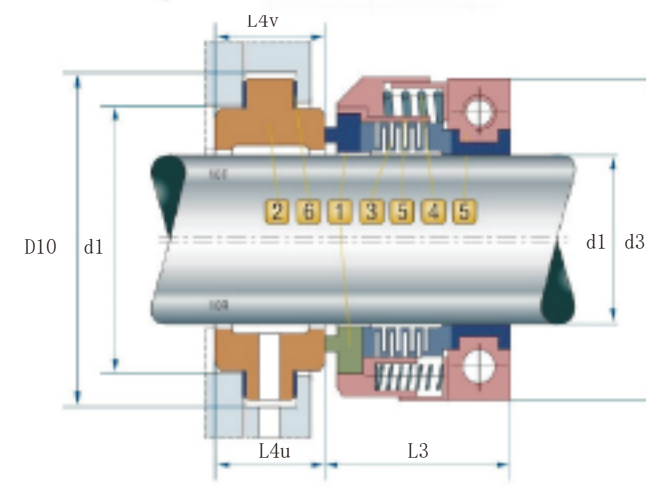

Type of counter ring

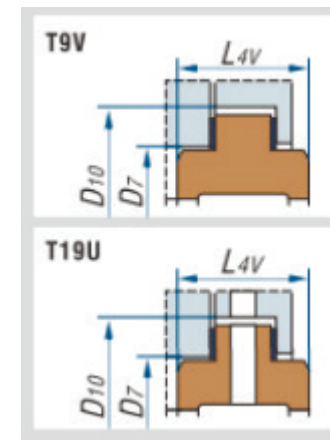

Single mechanical seal JX-10T/EK-10R

Used in pumps: Lowara, Ebara (3M), EMU, Flugt, Fristam, GEA Tuchenhausen, Goetz, etc.

Analogue: John Crane 10T / 10R. Anga A10 / 11,R-162 (T/R), R-WB2 (T/R)

JX-10T/10R (Inch)

	d1 (H6)	d3 (Max)	d7 (h8)	D10	L3 (±0.5)	L4v	L4u (h8)
0.750	19,05	54	36,51	48	31	17,6	28,65
0.875	22,23	57	39,69	51	31	17,6	28,65
1.000	25,40	61	42,86	54	33	17,6	28,65
1.125	28,58	67	50,8	65	36	27,0	38,25
1.250	31,75	70	53,98	68	37	27,0	38,25
1.375	34,93	73	57,15	71	38	27,0	38,25
1.500	38,10	76	63,5	78	38	27,0	38,25
1.625	41,28	80	66,68	81	40	27,0	38,25
1.750	44,45	83	69,85	84	40	27,0	38,25
1.875	47,63	86	73,03	87	43	27,0	38,25
2.000	50,80	89	79,38	97	43	33,30	47,58
2.125	53,98	103	82,55	100	53	33,30	47,58
2.250	57,15	107	85,73	103	53	33,30	47,58
2.375	60,33	110	88,9	106	53	33,30	47,58
2.500	63,50	113	92,08	110	53	33,30	47,58
2.625	66,68	116	95,25	113	53	33,30	47,58
2.750	69,85	118	98,43	116	53	33,30	47,58
2.875	73,03	122	100,01	117	53	33,30	47,58
3.000	76,20	126	103,19	121	53	33,30	47,58
3.250	82,55	150	114,3	132	73	33,30	47,58
3.500	88,90	156	120,65	138	73	33,30	47,58
3.750	95,25	163	127	144	73	33,30	47,58
4.000	101,6	169	133,35	151	73	33,30	47,58

PTFE seals are designed for use in extremely aggressive environments: strong acids, organic compounds, salt solutions, and chemically active compounds.

-The mechanical seal design prevents slipping on the shaft and premature wear.

-Flexible PTFE bellows design. Maximum corrosion resistance. Eliminates the possibility of misalignment of the bellows.



JIEXIN MECHANICAL SEAL CO., LTD

Contact: Huo Yuwei

WhatsApp: +0086 13925553104

Email: a13925553104@163.com

https://jiexinseal.en.alibaba.com/

Address: Sanhe Industrial Zone, Hengkeng, Liaobu Town, Dongguan, Guangdong



Mechanical seal JX-152

Temperature: -20°C~120°C

Pressure: ≤0.5 mpa

Speed: ≤3000 rpm

Materials


Rotary ring: Ceramic / SIC / PTFE.

Stationary ring: Carbon / SIC / AL.

Bellows: PTFE.

Spring: SSS304 / SS316.

Metal parts: SS304 / SS316.

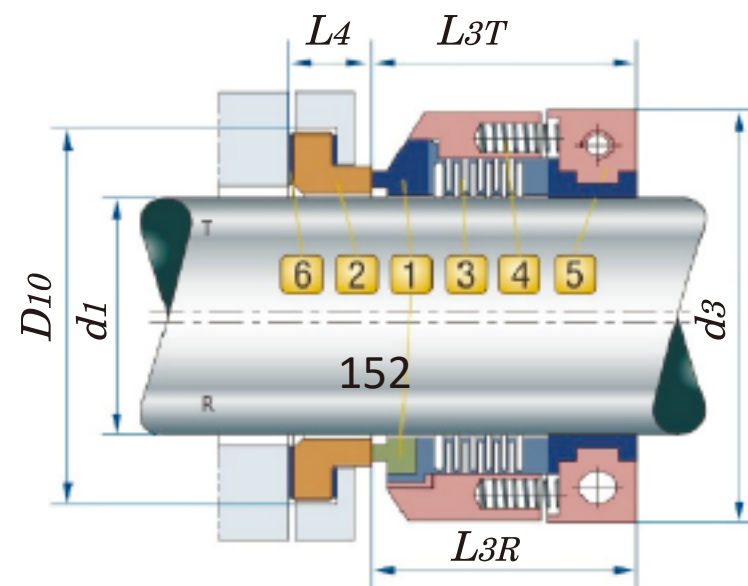

JX-152 (T/R)

d1 (H6)	d3 (Max)	D10 (h8)	L3T	L3R (±0.5)	L4 (h8)
25	60	48	42	45	13
30	67	53	42	45	13
35	72	58	42	45	13
40	78	63	42	45	13
45	84	68	44	46	16
50	88	73	46	46	16
55	95	78	46	46	16
60	100	83	46	46	17
65	105	88	46	46	17



JIEXIN MECHANICAL SEAL CO., LTD

Contact: Huo Yuwei

WhatsApp: +0086 13925553104

Email: a13925553104@163.com

https://jiexinseal.en.alibaba.com/

Address: Sanhe Industrial Zone, Hengkeng, Liaobu Town, Dongguan, Guangdong



Mechanical seal JX-WB2

Temperature: -20°C~120°C

Pressure: ≤0.5 mpa

Speed: ≤3000 rpm

Materials


Rotary ring: Ceramic / SIC / PTFE.

Stationary ring: Carbon / SIC / AL.

Bellows: PTFE.

Spring: SSS304 / SS316.

Metal parts: SS304 / SS316.

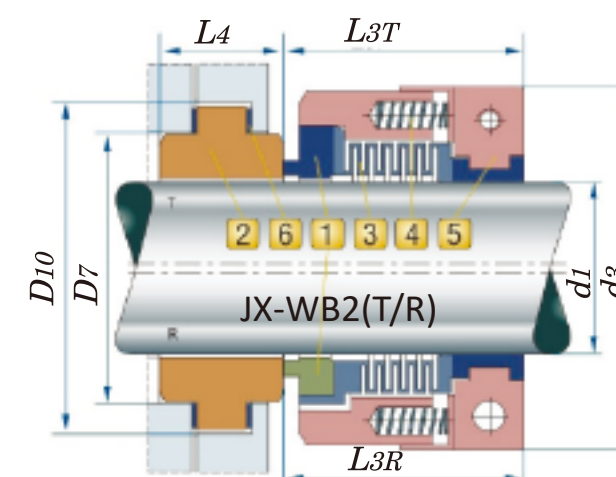

Single mechanical seal JX-152/WB2

Used in pumps: Lowara, Ebara (3M), EMU, Flugt, Fristam, GEA Tuchenhausen, Goetze, etc.

Analogue: John Crane 10T / 10R. Anga A10 / 11, R-162 (T/R), R-WB2 (T/R)

JX-WB2(T/R)

d1 (H6)	d3 (Max)	D10 (h8)	d7	L3T (±0.5)	L3R (h8)	L4
25	60	60	47	42	45	27
30	67	67	53	42	45	27
35	72	70	57	42	45	27
40	78	76	62	42	45	27
45	84	82	67	44	46	27
50	88	86	72	46	46	27
55	95	90	77	46	46	27
60	100	95	82	46	46	27
65	105	100	87	46	46	27



JIEXIN MECHANICAL SEAL CO., LTD

Contact: Huo Yuwei

WhatsApp: +0086 13925553104

Email: a13925553104@163.com

https://jiexinseal.en.alibaba.com/

Address: Sanhe Industrial Zone, Hengkeng, Liaobu Town, Dongguan, Guangdong



Mechanical seal JX-LPS

Temperature: -20°C~150°C

Pressure: ≤ 0.6 mpa

Speed: ≤ 10 m / sec

Materials


Rotary ring: SIC / TC.

Stationary ring: Carbon / SIC / TC.

Bellows: NBR / EPDM / VITON.

Spring: SSS304 / SS316.

Metal parts: SS304 / SS316.

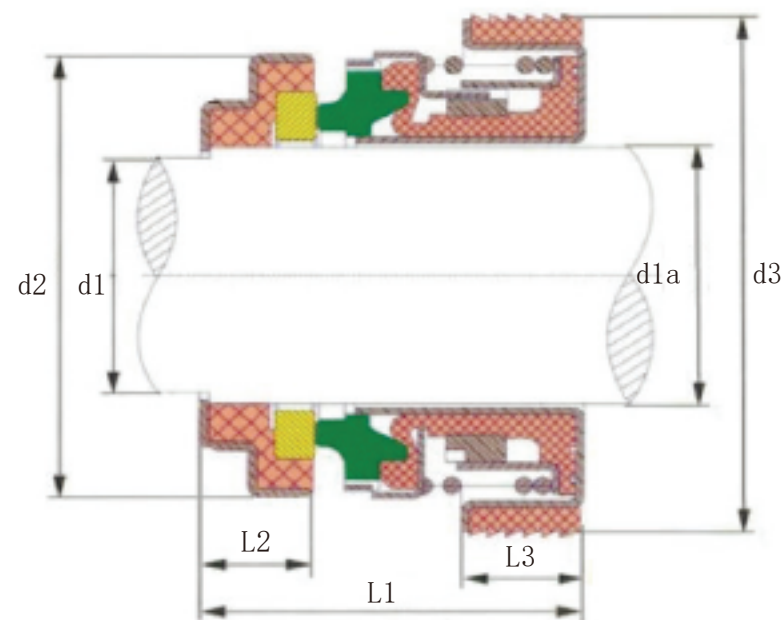

JX-LPS

d1	d1a (H6)	d2	d3 (h8)	L1 (± 0.5)	L2	L3 (h8)
15	12	34	41	29,5	10	10



JIEXIN MECHANICAL SEAL CO., LTD

Contact: Huo Yuwei

WhatsApp: +0086 13925553104

Email: a13925553104@163.com

https://jiexinseal.en.alibaba.com/

Address: Sanhe Industrial Zone, Hengkeng, Liaobu Town, Dongguan, Guangdong



Mechanical seal JX-XB

Temperature: -20°C~120°C

Pressure: ≤ 0.4 mpa

Speed: ≤ 3000 rpm

Materials


Rotary ring: Ceramic / SIC .

Stationary ring: Carbon / SIC

Bellows: NBR / VITON.

Spring: SSS304 / SS316.

Metal parts: SS304 / SS316.

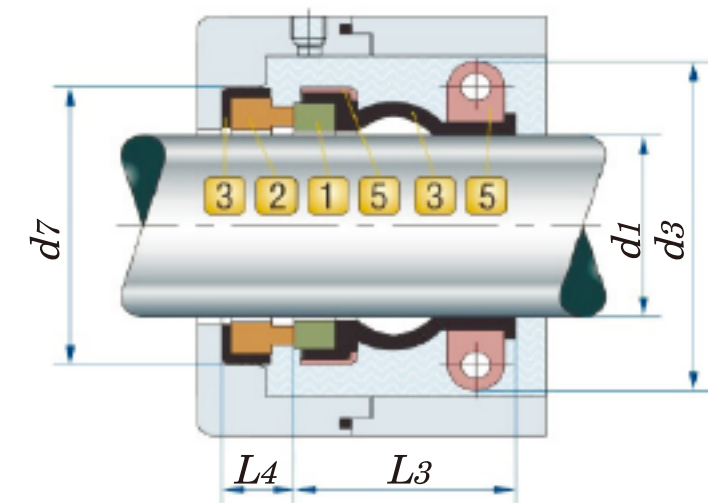

JX-XB

d1 (H6)	d3 (Max)	d7 (h8)	L3 (± 0.5)	L4
25	50.0	41.0	30.0	12.0
30	56.5	47.5	30.0	12.0
35	63.5	53.0	32.2	12.5



JIEXIN MECHANICAL SEAL CO., LTD

Contact: Huo Yuwei

WhatsApp: +0086 13925553104

Email: a13925553104@163.com

https://jiexinseal.en.alibaba.com/

Address: Sanhe Industrial Zone, Hengkeng, Liaobu Town, Dongguan, Guangdong



Mechanical seal JX-204B

Temperature: -20°C~200°C

Pressure: ≤0.6mpa

Speed: ≤500 rpm

Materials


Rotary ring: SIC/TC/Carbon.

Stationary ring: Carbon/TC.


Bellows: EPDM/VITON.

Spring: SSS304 / SS316.

Metal parts: SS304 / SS316.

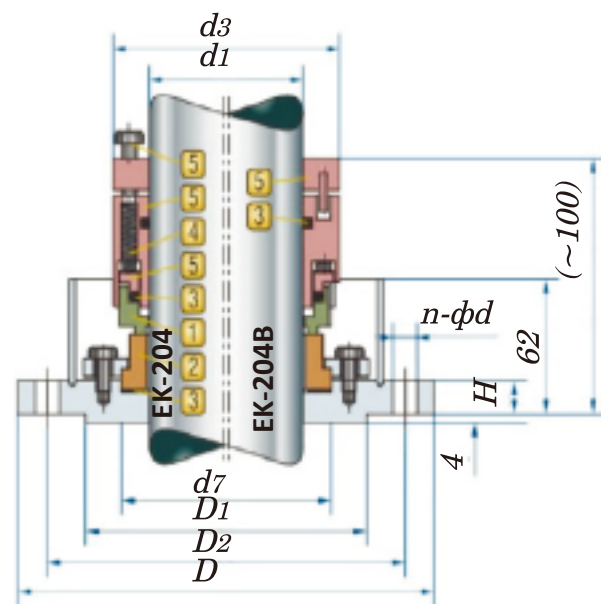

Type of counter ring

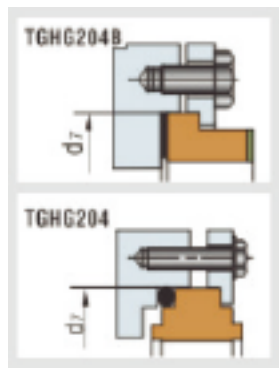

JX-204B

d1 (H6)	d3 (Max)	d7 (h8)	D1 (±0.5)	D2	D (h8)	H	n-4
30	67	50	116	150	185	20	4-18
40	77	64	135	170	205	20	4-18
50	87	74	164	200	235	20	8-18
60	98	85	164	200	235	20	8-18
65	103	91	164	200	235	20	8-18
80	118	110	188	225	260	20	12-18
95	128	119	220	255	290	20	12-18
100	138	132	245	280	315	20	12-18
110	148	140	245	280	315	20	12-18
120	158	158	245	280	315	26	12-18
130	168	168	245	280	315	26	12-18
140	178	180	245	280	315	26	12-18
150	188	190	285	320	360	29	12-18

JX-204

d1 (H6)	d3 (Max)	d7 (h8)	D1 (±0.5)	D2	D (h8)	H	n-4
30	66,00	60,00	116,00	150,00	185,00	20,00	4-18
40	76,00	70,00	135,00	170,00	225,00	20,00	4-18
50	88,00	80,00	164,00	200,00	235,00	20,00	8-18
65	103,00	97,00	164,00	200,00	235,00	22,00	8-18
80	118,00	112,00	188,00	225,00	260,00	22,00	12-18
95	135,00	127,00	220,00	255,00	290,00	24,00	12-18
110	150,00	142,00	245,00	280,00	315,00	24,00	12-18

Single end seal JX-204B

Applicable to Alfa Laval, APV, Calpeda, Inoxpa, KSB, Lowara, Grundfos, Hilge, Ebara pumps series

Analogue: Burgmann, John Crane, Roten, AESSEAL, Anga, Vulcan, Lidering, DIMER



JIEXIN MECHANICAL SEAL CO., LTD

Contact: Huo Yuwei

WhatsApp: +0086 13925553104

Email: a13925553104@163.com

https://jiexinseal.en.alibaba.com/

Address: Sanhe Industrial Zone, Hengkeng, Liaobu Town, Dongguan, Guangdong



Mechanical seal JX-212

Temperature: -20°C~120°C

Pressure: ≤0.5 mpa

Speed: ≤5000 rpm

Materials


Rotary ring: Glass Filled PTFE.

Stationary ring: Aluminium Oxide/SIC

Bellows: PTFE

Spring: SSS304 / SS316.

Metal parts: SS304 / SS316.

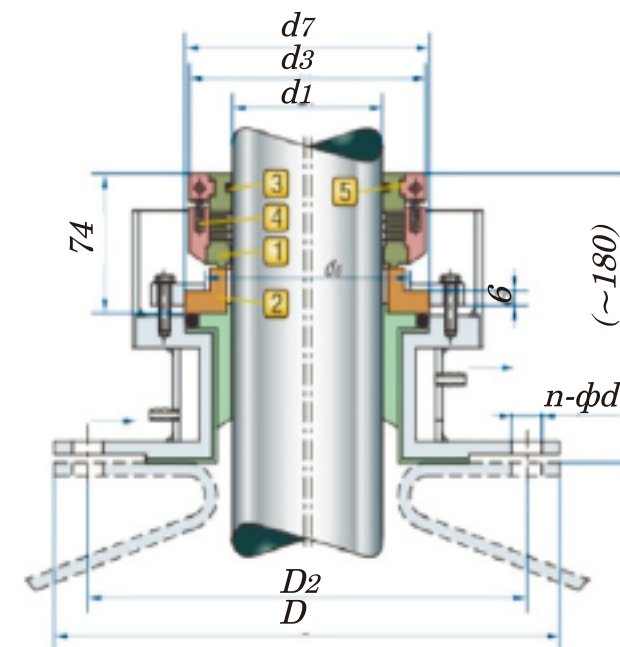

JX-212-A

d1	d3	d6	d7	D2	D	n-4
40	87	72	87	130	160	4-18
50	98	80	100	150	190	4-18
60	110	90	105	170	210	4-18
65	115	95	115	170	210	8-18
70	120	100	115	200	240	8-18
75	130	110	130	200	240	8-18
80	130	110	130	200	240	8-18
90	140	120	140	225	265	12-18
95	145	125	150	225	265	12-18
100	150	130	150	250	280	12-18
110	162	140	165	280	320	12-18
120	172	150	175	280	320	12-18
130	182	162	177	335	375	12-18
140	192	170	195	335	375	12-18
150	202	180	205	335	375	12-18

JX-212-B

d1	d3	d6	d7	D2	D	n-φ
40	90	72	88	130	160	4-18
50	100	80	101	150	185	4-18
65	115	95	116	170	205	4-18
80	130	110	131	200	235	8-18
95	150	125	151	200	235	8-18
102	150	130	156	255	290	8-18

JX-212-C

d1	d3	d6	d7	D2	D	n-φ
42	90	72	80	140	170	6-15
50	100	80	101	170	200	8-15
60	110	90	110	190	220	10-15
70	120	100	121	250	280	16-15
76	130	110	131	250	280	16-15
80	130	110	131	250	280	16-15
89	140	120	141	250	280	16-15
95	150	125	151	300	330	20-15

Single mechanical seal JX-212

Used in highly concentrated mediums such as acids, alkalis, oil abrasives for reactors and mixers. Fits for chemical, oil processing and pharmaceutical industry.

Is applicable to the Alfa pumps series:

Laval, APV, Calpeda, Inoxpa, KSB, Lowara, Grundfos, Hilge, Ebara

Analogue: Burgmann, John Crane, Roten, AESSEAL, Anga, Vulcan, Lidering, DIMER.



JIEXIN MECHANICAL SEAL CO., LTD

Contact: Huo Yuwei

WhatsApp:+0086 13925553104

Email:a13925553104@163.com

https://jiexinseal.en.alibaba.com/

Address: Sanhe Industrial Zone, Hengkeng, Liaobu Town, Dongguan, Guangdong



JIEXIN MECHANICAL SEAL CO., LTD

Contact: Huo Yuwei

WhatsApp:+0086 13925553104

Email:a13925553104@163.com

https://jiexinseal.en.alibaba.com/

Address: Sanhe Industrial Zone, Hengkeng, Liaobu Town, Dongguan, Guangdong



Mechanical seal JX-HRN

Temperature: -20°C~140°C

Pressure: ≤1.4 mpa

Speed: ≤15 m/sec

Materials


Rotary ring: Ceramic / SIC / TC.

Stationary ring: Carbon / SIC / TC.

Bellows: NBR / EPDM / VITON.

Spring: SSS304 / SS316.

Metal parts: SS304 / SS316.

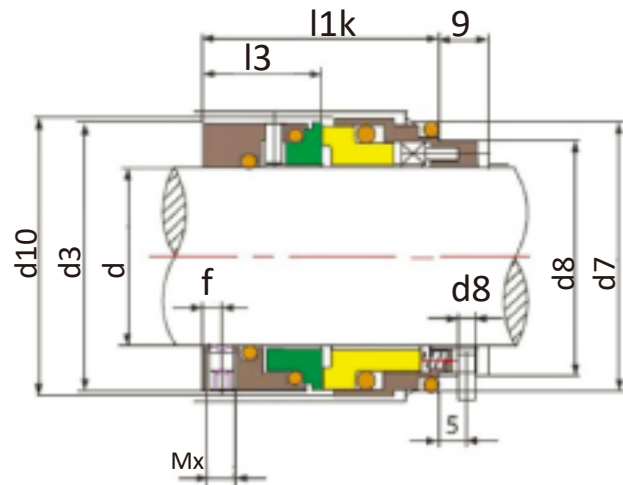

Single mechanical end seal JX-HRN
-seal with a non-rotating movable ring.

It is suitable for contaminated media with abrasive particles and waste water. Can be used as part of a tandem. The non-rotating multi-spring unit is isolated from the product, which prevents sticking and clogging.

Applicable to Alfa Laval, Ebara Lowara, KSB (Etanorm, Etachrom), WILO (MVI, MHI, IPL), Grundfos (CDM), Saer (IP), Calpeda (GM, MXS), Hecker HN 410SU pumps

Analogues: Burgmann HRN, Roten EHS3 seal

d	d3	d6	d7	d8	d10	l1k	l3	f	Mx
18	33	27	33	3	34,7	37,5	19,5	3	4
20	35	29	35	3	36,7	37,5	19,5	3	4
22	37	31	37	3	38,7	37,5	19,5	3	4
24	39	33	39	3	40,7	40	20,5	3,5	5
25	40	34	40	3	41,7	40	20,5	3,5	5
28	43	37	43	3	44,7	42,5	21,5	3,5	5
30	45	39	45	3	46,7	42,5	21,5	3,5	5
32	48	42	48	3	49,7	42,5	21,5	3,5	5
33	48	42	48	3	49,7	42,5	21,5	3,5	5
35	50	44	50	3	51,7	42,5	21,5	3,5	5
38	56	49	56	4	57,7	45	24	4	6
40	58	51	58	4	59,7	45	24	4	6
43	61	54	61	4	62,7	45	24	4	6
45	63	56	63	4	64,7	45	24	4	6
48	66	59	66	4	67,7	45	24	4	6
50	70	62	70	4	71,7	47,5	25	4	6
53	73	65	73	4	74,7	47,5	25	4	6
55	75	67	75	4	76,7	47,5	25	4	6
58	78	70	78	4	80,5	52,5	28	4	6
60	80	72	80	4	82,5	52,5	28	4	6
63	83	75	83	4	85,5	52,5	28	4	6
65	85	77	85	4	87,5	52,5	28	4	6
68	90	81	90	4	92,5	52,5	28	4	6
70	92	83	92	4	94,5	60	34	6	8
75	97	88	97	4	100,5	60	34	6	8
80	105	95	105	4	108,5	60	34	6	8
85	110	100	110	4	113,5	60	34	6	8
90	115	105	115	4	118,5	65	39	10	8
95	120	110	120	4	123,5	65	39	10	8
100	125	115	125	4	128,5	65	39	10	8



Mechanical seal JX-LW

Temperature: -20°C~220°C

Pressure: ≤0.5 mpa

Speed: ≤20 m/sec

Materials


Rotary ring: Carbon

Stationary ring: SIC

Bellows: NBR / EPDM / VITON.

Spring: SSS304 / SS316.

Metal parts: SS304 / SS316.

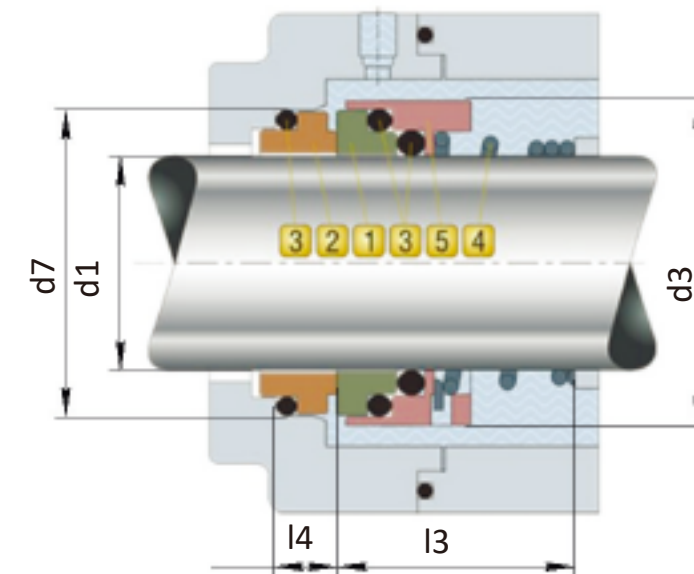

	d1	d3	d6	d7	L3	L4
	d6	Max		H8	±0.5	
JX-LW-12	12	22	19	23	25.5	7
JX-LW-16	16	29	23	27	28	7

Mechanical seal JX-LW

Used in Lowara pumps of the SV, e-SV series.



JIEXIN MECHANICAL SEAL CO., LTD

Contact: Huo Yuwei

WhatsApp: +0086 13925553104

Email: a13925553104@163.com

https://jiexinseal.en.alibaba.com/

Address: Sanhe Industrial Zone, Hengkeng, Liaobu Town, Dongguan, Guangdong



Mechanical seal JX-6SB/SB

Temperature: -20°C~100°C

Pressure: ≤ 0.3 mpa

Speed: ≤ 3000 rpm

Materials


Rotary ring: Ceramic / SIC .

Stationary ring: Carbon / SIC

Bellows: NBR

Spring: SSS304 / SS316.

Metal parts: SS304 / SS316.

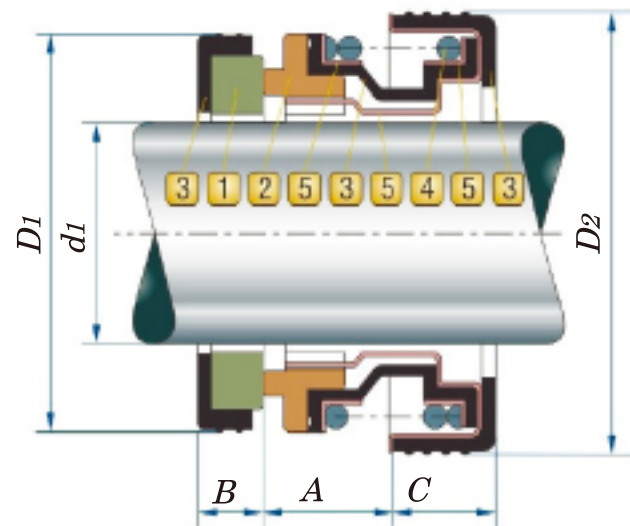

JX-6SB	d1 (H6)	D1 (Max)	D2 (h8)	A (± 0.5)	B	C (h8)
12	12	25	32	5.2	5	9.0
16	16	31	41	6.8	5	10.0
20	20	35	45	6.0	5	11.5
25	25	44	52	8.5	7	11.5
30	30	48	58	8.8	8	12.5

JX-SB	d1 (H6)	D1 (Max)	D2 (h8)	A (± 0.5)	B	C (h8)
12	12	25	30	6.0	5	8.5
17	17	31	35	9.0	7	9.5
20	20	36	40	12.0	7	9.5
25	25	42	50	10.5	8	13.5
28	28	45	54	10.0	8	11.5
30	30	48	54	10.0	8	11.5



JIEXIN MECHANICAL SEAL CO., LTD

Contact: Huo Yuwei

WhatsApp: +0086 13925553104

Email: a13925553104@163.com

https://jiexinseal.en.alibaba.com/

Address: Sanhe Industrial Zone, Hengkeng, Liaobu Town, Dongguan, Guangdong



Mechanical seal JX-6CK-16

Temperature: -20°C~100°C

Pressure: ≤ 0.3 mpa

Speed: ≤ 5000 rpm

Materials


Rotary ring: Ceramic / SIC .

Stationary ring: Carbon / SIC

Bellows: NBR

Spring: SSS304 / SS316.

Metal parts: SS304 / SS316.

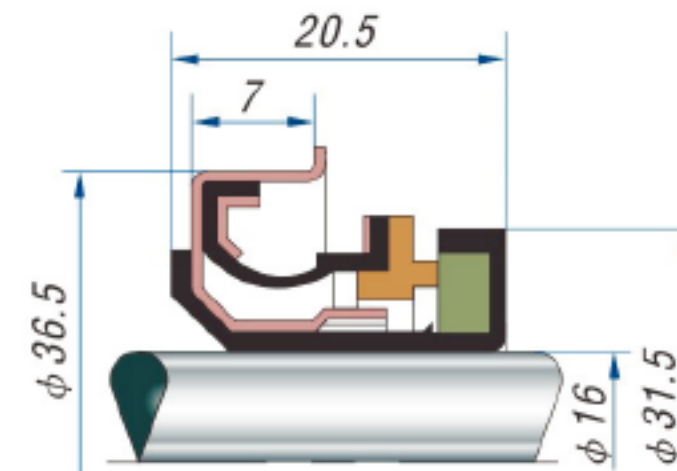

Mechanical seal JX-6CK-16

Is applicable to pumps for pumping water, oil and middle corrosive environments, etc.

Analogue: Burgmann, John Crane, Roten, AESSEAL, Anga, Vulcan, Lidering, DIMER, Flowserve.



JIEXIN MECHANICAL SEAL CO., LTD

Contact: Huo Yuwei

WhatsApp: +0086 13925553104

Email: a13925553104@163.com

https://jiexinseal.en.alibaba.com/

Address: Sanhe Industrial Zone, Hengkeng, Liaobu Town, Dongguan, Guangdong



Mechanical seal JX-6A

Temperature: -20°C~100°C

Pressure: ≤ 0.3 mpa

Speed: ≤ 5000 rpm

Materials


Rotary ring: Ceramic / SIC .

Stationary ring: Carbon / SIC

Bellows: NBR/HNBR.

Spring: SSS304 / SS316.

Metal parts: SS304 / SS316.

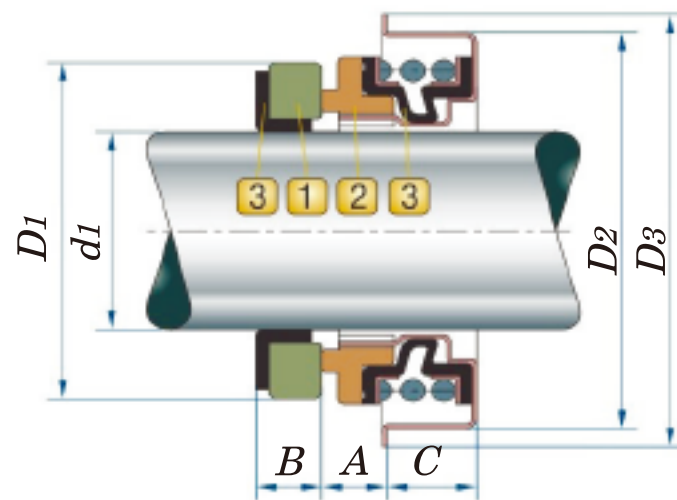

JX-6A	d1 (H6)	D1 (Max)	D2 (h8)	D3 (±0.5)	A	B	C
0.500	12,70	23,47	28,58	34,9	5,2	5,41	8,74
0.625	15,88	28,58	36,50	41,3	6,7	5,41	8,59
0.750	19,05	30,15	40,00	43,6	6.0	5,54	9,53
JX-6A	d1 (H6)	D1 (Max)	D2 (h8)	D3 (±0.5)	A	B	C
	12	24	30,0	35,0	5,2	5,0	8,0
	15	29,5	36,5	41,3	6,7	5,0	8,0
	16	29,5	36,5	41,3	6,7	5,0	8,0
	20	34.0	40.0	43.6	6.0	5.0	9.5



JIEXIN MECHANICAL SEAL CO., LTD

Contact: Huo Yuwei

WhatsApp: +0086 13925553104

Email: a13925553104@163.com

https://jiexinseal.en.alibaba.com/

Address: Sanhe Industrial Zone, Hengkeng, Liaobu Town, Dongguan, Guangdong



Mechanical seal JX-6-CH-16

Temperature: -20°C~100°C

Pressure: ≤ 0.3 mpa

Speed: ≤ 5000 rpm

Materials


Rotary ring: Ceramic / SIC .

Stationary ring: Carbon / SIC

Bellows: NBR/HNBR.

Spring: SSS304 / SS316.

Metal parts: SS304 / SS316.

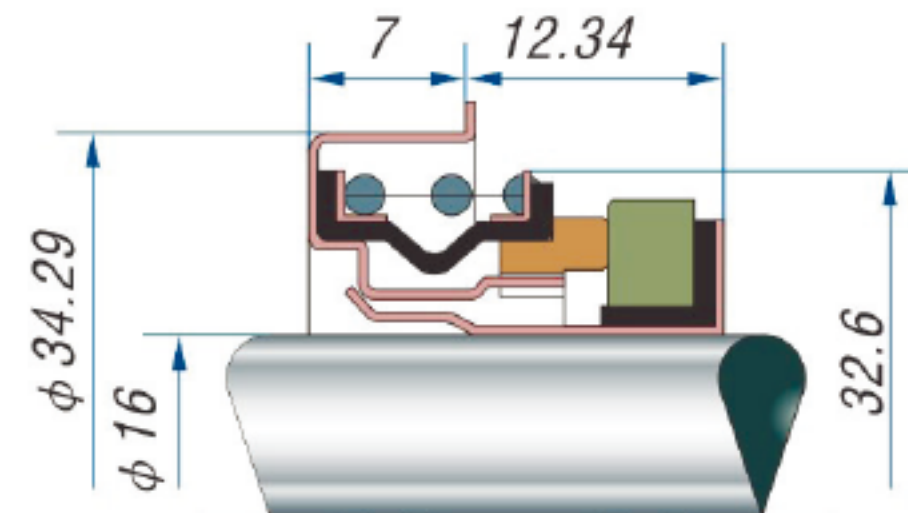

Is applicable to pumps for pumping water, oil and middle corrosive environments, and so on.




JIEXIN MECHANICAL SEAL CO., LTD

Contact: Huo Yuwei WhatsApp:+0086 13925553104
Email:a13925553104@163.com https://jiexinseal.en.alibaba.com/
Address: Sanhe Industrial Zone, Hengkeng, Liaobu Town, Dongguan, Guangdong



JIEXIN MECHANICAL SEAL CO., LTD

Contact: Huo Yuwei WhatsApp:+0086 13925553104
Email:a13925553104@163.com https://jiexinseal.en.alibaba.com/
Address: Sanhe Industrial Zone, Hengkeng, Liaobu Town, Dongguan, Guangdong

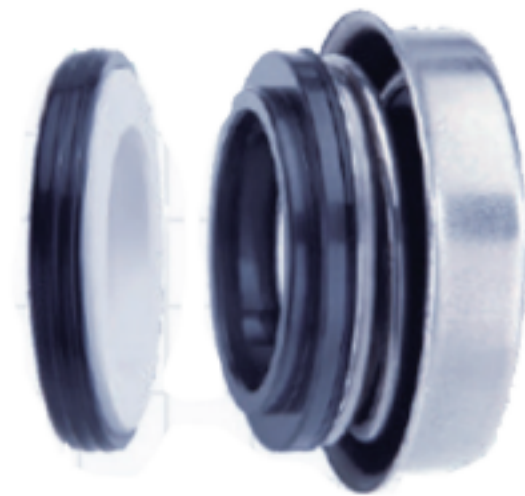


Mechanical seal JX-6B

Temperature: -20°C~100°C
Pressure: ≤0.3 mpa
Speed: ≤5000 rpm

Materials

Rotary ring: Ceramic/SiC.
Stationary ring: Ceramic/SiC.
Bellows: NBR/HNBR.
Spring: SSS304 / SS316.
Metal parts: SS304 / SS316.

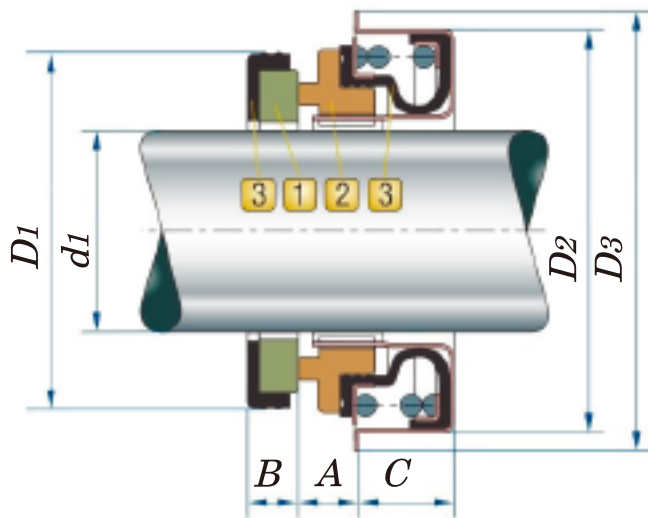

JX-6B (Inch)						
d1 (H6)	D1 (Max)	D2 (h8)	D3	A	B (±0.5)	C
9,53	22,23	28,58	31,8	4,1	7,92	7,92
12,70	25,40	28,58	34,9	5,2	7,92	8,74
15,88	31,75	36,50	41,3	6,7	10,31	8,59
19,05	34,93	40,00	43,8	6,0	10,31	9,53

JX-6B (Ci)						
d1 (H6)	D1 (Max)	D2 (h8)	D3	A	B (±0.5)	C
10	23	24,00	29,0	4,1	4	8,0
12	25	28,58	32,0	5,2	5	8,0
12M	24	30,00	35,0	5,2	5	8,0
16	31	36,50	41,5	6,7	5	8,0
20	35	40,00	43,8	6,0	5	9,5
25	44	47,00	51,0	8,0	7	10,0
30	48	52,00	57,0	8,0	8	11,0




Mechanical seal JX-6C

Temperature: -20°C~100°C
Pressure: ≤0.3 mpa
Speed: ≤5000 rpm

Materials

Rotary ring: Ceramic/SiC.
Stationary ring: Carbon/Sic.
Bellows: NBR/HNBR.
Spring: SSS304 / SS316.
Metal parts: SS304 / SS316.

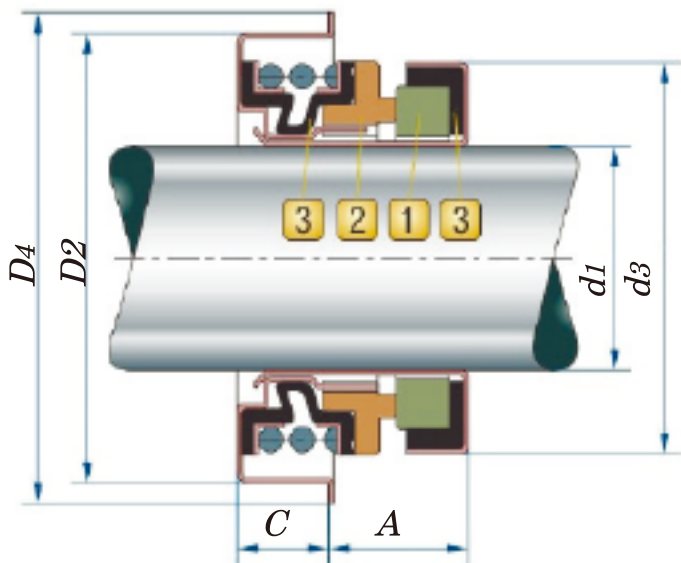

JX-6C	d1 (H6)	d3 (Max)	D2 (h8)	D4 (±0.5)	A	C (h8)
JX-6C-12	12	25	30,0	35,0	9,7	8,0
JX-6C-12S	12	25	28,58	32,0	9,7	8,0
JX-6C-12L	12	25	33,4	38,0	8,4	6,7
JX-6C-13	13	25	30,0	35,0	9,7	8,0
JX-6C-15	15	30	36,5	41,5	11,5	8,5
JX-6C-16	16	30	36,5	41,5	11,5	8,5
JX-6C-16L	16	30	38,1	41,5	11,5	8,5
JX-6C-20S	20	37	38,0	43,7	12,5	9,5
JX-6C-20	20	37	40,0	43,7	12,5	9,5



WhatsApp: +0086 13925553104

 <https://jiexinseal.en.alibaba.com/>

📍 Address: Sanhe Industrial Zone, Hengkeng, Liaobu Town, Dongguan, Guangdong



WhatsApp:+0086 13925553104

 <https://jiexinseal.en.alibaba.com/>

📍 Address: Sanhe Industrial Zone, Hengkeng, Liaobu Town, Dongguan, Guangdong



Temperature: -20°C~100°C

Pressure: ≤ 0.3 mpa

Speed: ≤ 5000 rpm

Materials

Rotary ring: Ceramic/SiC.

Stationary ring: Carbon/Sic.

Bellows: NBR/HNBR.

Spring: SSS304 / SS316.

Metal parts: SS304 / SS316.



d1 (H6)	D1 (Max)	D2 (h8)	D3 (±0.5)	A	B (h8)	C
16	29,5	36,5	42	7,8	5	10.0
20	35.0	40.0	44	6,9	5	8,6
25	44.0	47,2	53	11,7	7	10,8

意见表